广州极效能源科技有限公司
Nopein Techniques (Guangzhou) Co., Ltd.

官方公众号

ISO 9001 ISO 45001 ISO 14001

烹饪资讯热线：13903075144
全国售后热线：400-833-7300

广东省广州市经济技术开发区永和来安一街1号
1Laian 1 Street, Huangpu District
Guangzhou 511356, P.R.China

Tel +86-20-32155160 | Fax +86-20-32171316
Mail info@nopeinoven.com | Web www.nopeinoven.com

本册图片数据仅供参考,最终解释权归广州极效能源科技有限公司所有。
The images are for reference only. Final explanation is reserved by Nopein Techniques (Guangzhou) Co., Ltd.

版权所有©2018-2024广州极效能源科技有限公司
Copy right©2018-2024 Nopein Techniques (Guangzhou) Co., Ltd.

2024·极效产品

2024·第三版

广州极效能源科技有限公司
Nopein Techniques (Guangzhou) Co., Ltd.

智能烹饪 | 极效品质



2024 极效产品
CATALOGUE

版权所有©2018-2024广州极效能源科技有限公司 Copy right©2018-2024 Nopein Techniques (Guangzhou) Co., Ltd.

企业简介

Enterprise Profile

专精特新企业

广州极效能源科技有限公司，是一家集研发、生产和销售为一体的商用厨房设备制造企业。本企业专注于微波、快速加热、传导和节能环保等技术的研发和应用，并且将技术应用于餐饮行业。

我们的技术专家不仅拥有丰富的技术应用专长，更加拥有数十年的商用厨房营运服务从业经验。我们与国际快餐连锁企业、国内餐饮集团，亚太、北美及欧洲专业客户都有广泛的深度业务合作。我们不仅了解产品，更加了解餐饮行业、菜品烹饪过程和细节控制，本企业餐饮设备与您的业务完美融合。

公司经营秉持以工匠精神、不断创新的理念，为用户提供便利高效的产品和解决方案，为用户创造效益。

-NopeinOven® series
-GRANDFRYER® series
-NopeinCombi® series
-GRANDOVEN® series
-GRANDGRILL® series
-LEVENT Appliance series

Formally found in 2015, Nopein Techniques (Guangzhou) Co., Ltd commits itself to maximize energy usage into Commercial Kitchens.

Focus on energy innovation, Nopein Techniques gathered a group of visionary engineers, to develop and build a series new concept commercial kitchen appliances with application of fast heating, energy saving, and environmental friendly techniques.

In the spirit of artisan, Nopien people persists in combination of modern energy technology and traditional cooking methods, to benefit Nopien customers. Nopien Techniques has developed six families commercial kitchen equipment.

这些商用厨房设备广泛应用于咖啡厅、新茶饮、便利店、烘焙、中西式餐厅、QSR、医院和酒店等商业厨房。

Those commercial kitchen equipment are widely used in coffee shops, bars, convenient stores, QSR, hospitals & hotels, and other commercial kitchens, etc.



广州极效能源科技有限公司



CATALOGUE

目录

05–16

NOPEINOVEN
[诺宾炉系列]

05–12 High Speed Oven 微波热风快速烤箱
13–14 Microwave Meo Oven 小型微波烤箱
15–16 Microwave Steamer 微波蒸柜

17–36

NOPEINCOMBI
[诺宾万能蒸烤箱系列]

17–32 NopeinCombi 万能蒸烤箱
33–36 Electric Roaster 烧烤炉

37–64

GRAND
[歌兰德系列]

37–46 GrandFryer 炸炉系列
47–54 GrandOven 履带式电热披萨炉系列
55–56 Conveyor Fish Roaster 链式烤鱼炉
57–60 GrandHold 保温柜系列
61–62 Single-head double-sided griddle 单头双面煎扒炉
63–63 Countertop Heavy-Duty Griddle 台式扒炉
64–64 Countertop electric dumpling griddle 单双头电热煎饺机

65–70

LEVENT
[乐飘逸系列]

65–68 Electric Hyper Steamer 高温智能蒸柜
69–69 Electric Auto-lift Noodle Cooker 电热升降煮面炉
70–70 Economic Combi Oven 简易蒸烤箱

高效智能 | 极速出餐

EFFICIENT
INTELLIGENCE
EXTREME SPEED



版权所有©2018-2024广州极效能源科技有限公司
Copy right©2018-2024 Nopein Techniques (Guangzhou) Co., Ltd.

为什么选择诺宾炉？

WHY NopeinOven® ?

NopeinOven® 诺宾炉系列产品旨在为客户提供极速、节能、易于操作的烹饪解决方案，让用户即使在配餐高峰仍然得心应手、从容应对。NopeinOven® 诺宾炉集合了微波技术、冲击热风，实现极速加热、加热均匀一致及食物表面爽脆色泽诱人的烘焙效果。多段烹饪程序，每段烹饪灵活选择热风、高低风速、微波输出功率，组合丰富多样，再复杂的菜品也能出色完成。

The NopeinOven® series products are designed to provide customers with extremely fast, energy-saving and easy to-operate cooking solutions, so that operators can still be handy even during peak hours. With the combination of microwave, vertical hot air impingement, NopeinOven® rapid oven makes food heated fast, evenly and crisp with attractive color. NopeinOven® Micro computer provides multi-stages cooking cycle for each recipe. Each cooking cycle includes a combination settings of microwave, vertical hot air impingement, providing a wide range of cooking application.



咖啡店
Coffee Shop

新茶饮
New Tea Drinks

便利店
Convenience stores

中西餐厅
Chinese & Western Restaurant

快餐店
QSR

连锁餐饮
Chain restaurants

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

NopeinOven® 诺宾炉

极速烹饪 | 完美出餐

CONVENIENT/ INTELLIGENT
EXTREME SPEED

无需解冻，新鲜原味的秘诀在于烤肉披萨在 4° C 的冷藏环境中，保留原味。慢慢地从冷藏中脱离，即将开启美味之旅，烤制时在披萨上刷一层薄油，放入配置烤盘，披萨在诺宾炉内部微波快速解冻回温 ,140 秒分段加热。

超强热风冲击 + 高效微波，披萨由内而外迅速加热，鲜酥香脆，色泽诱人。

The secret of fresh and original flavor is that there is no need to thaw, and the pizza can keep its original flavor at 4 ℃. When baking, brush a thin layer of oil on the pizza and put it into the baking plate. The pizza is quickly thawed and warmed by microwave in the Nopeinoven within 140 seconds.

Strong hot air impingement + high efficient microwave. Pizza is heated rapidly from the inside out, crisp, attractive.

4℃

由内而外迅速加热

140s

出餐



CE ETL

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

USE FUNCTION

烹饪方式

- 超强热风快速加热 HOT AIR IMPINGEMENT
- 微波和热风冲击混合加热 COMBINATION OF MICROWAVE & IMPINGEMENT
- 微波快速加热 ULTRA-SPEED COOKING
- 微波和蒸汽混合加热 COMBINATION OF MICROWAVE AND STEAM
- 微波解冻，回温食物 FROZEN FOOD THAWING







广州极效能源科技有限公司



NopeinOven® EXTREME SPEED
COOKING SOLUTION

极速烹饪解决方案

5 IN 智能 5 英寸触摸屏控制系列

Features of model with 5–inch touch screen CTL



- 1024 个标准菜单储存能力
- 菜单可设置分段烹调程序
- 配置变频电机，每段烹调程序自由选择 10 档垂直冲击风、10 档微波功率输出
- 多重安全保护，微波锁止安全门设计
- 内置油烟过滤网、催化酶除味 *
- 标准菜单模式、自选模式
- 菜单保密功能、权限管理
- 系统自诊断功能
- 防空载提醒功能、菜单烹调流程定义功能
- 支持 IOT 无线互联，可实现设备数据信息共享



IOT WIRELESS INTERCONNECTION

IOT 无线互联

- 1024 standard menu storage capacity
- The menu can be set to phase cooking program
- Equipped with a variable frequency motor
- Adjustable blower speed range from 10% to 100% in 10% increment
- Microwave power range from 10% to 100% in 10% increment
- Multiple safety protection, microwave lock safety door design
- Built–in oil smoke filter and catalytic converter*
- Standard menu mode, customized mode
- Menu confidential function, authority management
- System self–diagnosis function
- Anti–empty load reminder function, menu cooking process naming function
- IOT wireless interconnection. Smart connect allows real–time access to your device via any smart device

HIGH SPEED OVEN

微波热风快速烤箱

可选颜色
Color available



Black 黑色　Red 红色　Orange 橙色　Stainless 不锈钢原色



NT–ProSiT

小功率 ,16A 以下插头可用
适用性更广

LOW POWER, PLUGS BELOW 16A ARE AVAILABLE
WIDER APPLICABILITY



NT–ProBT

双微波 , 大功率
效率更高，出餐速度快

DUAL MICROWAVE, HIGH POWER
MORE EFFICIENT, FASTER MEAL DELIVERY



NT–WK

双微波、大功率、
内膛尺寸大，可烹饪体积较大食物

DUAL MICROWAVES, HIGH POWER,
LARGE INTERNAL CAVITY, CAN COOK LARGER FOOD



* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

NopeinOven® 诺宾炉

产品规格表

Model Table







产品型号 Model	NT–ProSiT	NT–ProBT/ NT–ProBT–D	NT–WK
微电脑控制板型号 Micro Computer	5 英寸触摸屏 (5" Touch Screen CTL)	5 英寸触摸屏（5" Touch Screen CTL)	5 英寸触摸屏（5" Touch Screen CTL)
产 品 尺 寸 Product Size WxDxH (mm)	460 × 675 × 660	460 × 677 × 660	515 × 770 × 697
内 膛 尺 寸 Chamber Size WxDxH (mm)	305 × 305 × 185	317 × 294 × 193	365 × 315 × 170
容 积 Capacity (Liter)	17 L	17 L	19 L
包装尺寸 Packing Size WxDxH (mm)	770×565×840	770×565×840	860×610×880
电压 / 频率 Voltage & Frequency	208–240V~, 50/60Hz	380–415V 3N~, 220–240V ~, 50/60Hz	380–415V 3N~, 220–240V ~, 50/60Hz
额定功率 Rated Power	3.5kW	6.3kW	7.2kW
净重 Net Weight (kg)	64	81	80
毛重 Gross Weight (kg)	88.5	96	105
烹饪段数 Cooking Stage	15	15	15
微波功率 Microwave Power	1.5kW	1.5kW*2	1.5kW*2
热风功率 Hotair Power	3 kW	3.0kW+2.5kW	3.9kW
面火功率 Infrared Radiance Power	NIL	NIL	NIL
风速段数 Blower Speed	10 档（Grade)	10 档 (Grade)	10 档 (Grade)
可存储菜单数 Stock Menu	1024	1024	1024
最高烹饪温度 Max Cooking Temp	280℃	280℃	280℃
微波输出范围 Microwave Output Range	0–100%, in 10% increment	0–100%, in 10% increment	0–100%, in 10% increment
烹 饪 模 式 Cooking Mode — 热风冲击 Vertical hot air impingement	●	●	●
烹 饪 模 式 Cooking Mode — 微波 Microwave	●	●	●
烹 饪 模 式 Cooking Mode — 底部循环热风 Microwave and convection	●	●	●
催化酶 Catalytic Converters	●	●	●
USB Port	●	●	●
防 水 等 级 IP Rating	IPX3	IPX3	IPX3
认证类型 Certificate	CE ETL	CE	-
可选颜色 Colour Available	不锈钢原色、黑、红、橙可选 Black/Red/Orange/SSL finish	不锈钢原色、黑、红、橙可选 Black/Red/Orange/SSL finish	不锈钢原色 /SSL finish

● 有 Yes — 无 Nil

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

| 配件列表 | Accessories List

ROUND PIZZA PAN

圆形批萨盘



仅适用 / GOOD FOR

NT–PROSIT


NT–WK

用于 / USED FOR

披萨 / PIZZA

TEFLON MESH BASKET

特氟龙网格篮



适合于 / GOOD FOR

NT–PROBT/ NT–PROBT–D

NT–PROSIT

NT–WK

用于 / USED FOR


牛角包 / CROISSANT

鸡中翅 / CHICHEN WING

贝 果 / BAGELS

ROUND TEFLON MESH PAD

圆形特氟龙网格垫



适合于 / GOOD FOR

NT–PROBT/ NT–PROBT–D

NT–PROSIT

NT–WK

用于 / USED FOR

披萨 / PIZZA

烹饪面包类，可搭配披萨盘使用

Cooking bread, can be used with pizza pan

OVEN SHOVEL

烘 焙 铲



适合于 / GOOD FOR

NT–PROBT

NT–PROBT–D

NT–PROSIT

NT–WK

ALUMINUM GRILL PLATE

铝 扒 板



适合于 / GOOD FOR

NT–PROBT/ NT–PROBT–D

NT–WK

用于 / USED FOR


三明治 / SANDWICH

牛排 / STEAK

鸡中翅 / CHICKEN WING

INNER HALL GRILL

内膛烤盘架



适合于 / GOOD FOR

NT–PROSIT

用于 / USED FOR

吐司 / TOAST BREAD

欧包 / EUROPEAN BREAD

版权所有 ©2018–2024 广州极效能源科技有限公司 COPY RIGHT©2018–2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

MICROWAVE MEO OVEN

小型微波烤箱

紧凑型设计

美味更轻松





- ◎ 紧凑型设计，更省空间
- ◎ 一体式拉手设计、随门体取出层架食物
- ◎ 加热管热辐射＋微波双层加热模式，极大缩短烹饪时间，快速出餐
- ◎ 上下加热，独立控制，满足不同烤制需求
- ◎ 3 寸按键式结合，界面简洁，操作便利
- ◎ 可设置 10 个存储菜单、轻松调用
- ◎ 支持 IOT 无线互联（可选配）
- ◎ 省电模式，节省能源

- ◎ Compact design saves space
- ◎ Integrated handle, linked with door body, Easy to take foods out
- ◎ Heater heat radiation+ Microwave, Dual layer heating mode, Fast cooking
- ◎ Separately controlled for Top and bottom heaters Meet various baking needs
- ◎ Combination of 3'' Screen Display and Digital Controller, Simple interface, easy operation
- ◎ 10 Menu keys, easy to program
- ◎ IOT wireless networking (Optional)
- ◎ ECO mode, energy saving

型号 Model	产品尺寸 Product Size (mm)			内膛尺寸 Chamber Size (mm)			电压 / 频率 Voltage & Frequency	加热管输出功率 Heating Element Output Power		微波功率 Microwave Power	功率 Power
	长 D	宽 W	高 H	长 D	宽 W	高 H		上 Upper	下 Lower		
NT-MWO	470	561	360	250	165	80	220-240V 50/60Hz	1.0kW	0.7kW	1.5kW	3.3kW

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

3 寸屏幕
3-inch screen

界面简洁，操作便利
Simple user interface, Easy operation





* 产品规格及设计如有变更，恕不另行通知，本手册内以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

MICROWAVE STEAMER

微波蒸柜



可选颜色
Color available

Black 黑色 | Red 红色 | Orange 橙色 | Stainless 不锈钢原色

功能特点 | Features

- 三种工作模式，纯微波、纯蒸汽、微波蒸汽混合模式实现食物快速解冻，快速回温等各种场景需求
- 操作面板直观易懂，方便易用
- 24 个标准菜单储存，每个菜单 3 段烹饪
- 微波和蒸汽输出量可以 0–100%（0，10%，20%，30%.....90%，100%），11 档调节
- 保压锅炉，蒸汽温度最高可到 125℃，且烹饪过程中蒸汽不间断
- 双磁控管，微波功率大，带搅拌器，微波更加均匀
- 自带进水泵，对外部水源水压无要求
- 多重安全保护，微波安全门设计
- Three working modes, pure microwave, pure steam, microwave and steam mixed mode. Realize the needs of various scenes such as fast thawing of food and fast temperature recovery
- Simple operation panel, easy to use
- Can store 24 standard menus, 3 cooking stages for each menu
- Microwave and steam output can be adjusted from 0–100% (0, 10%, 20%, 30%...90%, 100%), 11 levels
- In the pressure-keeping boiler, the steam temperature can reach up to 125°C, and the steam is uninterrupted during the cooking process
- Double magnetron, high microwave power, with stirrer, microwave more uniform
- Built-in water inlet pump, no requirement for water pressure of the external water source
- Multiple safety protection, microwave safety door design

快餐店 QSR	便利店 Convenience stores	连锁餐饮 Chain restaurants	全日制餐厅 24h stores







产品型号 Model	NT-WZ
微电脑控制板型号 Control Panel Model	NT-WZ 按键型 NT-WZ Digital
产品尺寸 Product Size WxDxH (mm)	515x770x697
内膛尺寸 Chamber Size WxDxH (mm)	365x334x170
容积 Capacity (Liter)	20 L
电压 / 频率 Voltage & Frequency	380V~/50Hz
额定功率 Rated Power	5.3kW
烹饪段数 Cooking Stage	3
可存储菜单数 Stock Menu	24
烹饪模式 Cooking Mode	微波，蒸汽，微波 + 蒸汽 Microwave, Steam, Microwave + Steam
微波功率 Microwave Power	1.5kW*2
蒸汽功率 Steam Power	2.2kW
微波输出范围 Microwave Output Range	0–100%
蒸汽输出范围 Steam Output Range	0–100%
锅炉温度可设范围 Boiler Temperature Range	95–125°C
包装尺寸 Packing Size WxDxH(mm)	860x610x880
净重 Net Weight (kg)	85.5
毛重 Gross Weight(kg)	110

IOT无线互联 IOT wireless interconnection
海量菜单 Massive menu
精细蒸汽团 Fine steam mass
全自动清洗 Automatic cleaning

精准烹饪 智慧多能

PRECISE COOKING
MULTIFUNCTION
INTELLIGENT



诺宾万能蒸烤箱系列

NopeinCombi® series

版权所有©2018–2024广州极效能源科技有限公司
Copy right©2018–2024 Nopein Techniques (Guangzhou) Co., Ltd.

版权所有 ©2018–2024 广州极效能源科技有限公司 COPY RIGHT©2018–2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

全新第四代 NopeinCombi® 万能蒸烤箱
强悍的烹饪能力智能控制系统

NopeinCombi®, the fourth-generation combi oven intelligent control system

触摸屏系列

Touch screen series

内置 Turbo-Booster 锅炉，强劲高效新鲜蒸汽发生器，全面满足精细蒸汽团的要求。Linux 开源式控制系统可快速满足新零售智能厨房业态延展性功能需求，支持大数据管理功能。

Built-in Turbo-Booster boiler, strong and efficient fresh steam generator, fully meet the requirements of fine steam mass. A Linux-based controller can quickly meet the extended function demand of smart kitchen for internet-based retail service.

IT FITS ANY KITCHENS

它 | 适合任何厨房

从 NC0423T Mini 到 NC2021T Plus

任何规模的厨房，无论是开放式厨房或者是中央食品加工厂，均可找到适合的配置。

From NC0423T Mini to NC2021T Plus

Any size kitchen, whether it is an open kitchen or a central food processing plant, can find a suitable configuration.



版权所有 ©2018-2024 广州极效能源科技有限公司
COPY RIGHT©2018-2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

版权所有 ©2018-2024 广州极效能源科技有限公司
COPY RIGHT©2018-2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

烹饪是膳食的艺术
合适的温度恰到好处

Cooking is the art of meals, with the right temperature



NopeinCombi®
万能蒸烤箱

30~300℃宽域烹饪温度调节、Delta T 温差控制和多段烹饪控制完美实现**中式爆炒、焖、蒸、炖、烧烤**等不同烹饪方式。

Wide range cooking temperature regulation at 30 – 300℃, Delta T temperature difference control and multi-stage cooking control perfectly realize different cooking methods such as fried, steamed, stewed, barbecued, etc.




NopeinCombi® 万能蒸烤箱

烹饪百变，样样精通

Variety of cooking, all proficient

版权所有 ©2018-2024 广州极效能源科技有限公司
COPY RIGHT©2018-2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.





四种工作模式
4 FEATURES

- **菜单自动烹饪**
  MENU AUTOMATIC COOKING
- ×
- **万能蒸烤箱模式**
  COMBI MODE
- ×
- **编程模式**
  PROGRAMMING MODE
- ×
- **智能自动清洗**
  INTELLIGENT AUTOMATIC CLEANING

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

版权所有 ©2018–2024 广州极效能源科技有限公司
COPY RIGHT©2018–2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.


大脑容，大智慧

Enormous power, the result of outstanding engineering

1024
MENU

可储存 1024 个菜单，最高可达 15 段烹饪。

A max. storage capacitly of 1024 menus, up to 15 cooking stages for each cuisine.



自诊断功能，强大数据管理后台

Powerful data background management with Self Diagnosis Function

NopeinCombi® 万能蒸烤箱特有的设备自诊断功能，便于及时发现故障，迅速维修。


The unique self-diagnosis function of NopeinCombi® facilitates timely detection of faults and rapid maintenance.



高性价比 源于高配置

Affordable Price but High Configuration No Compromises in Performances



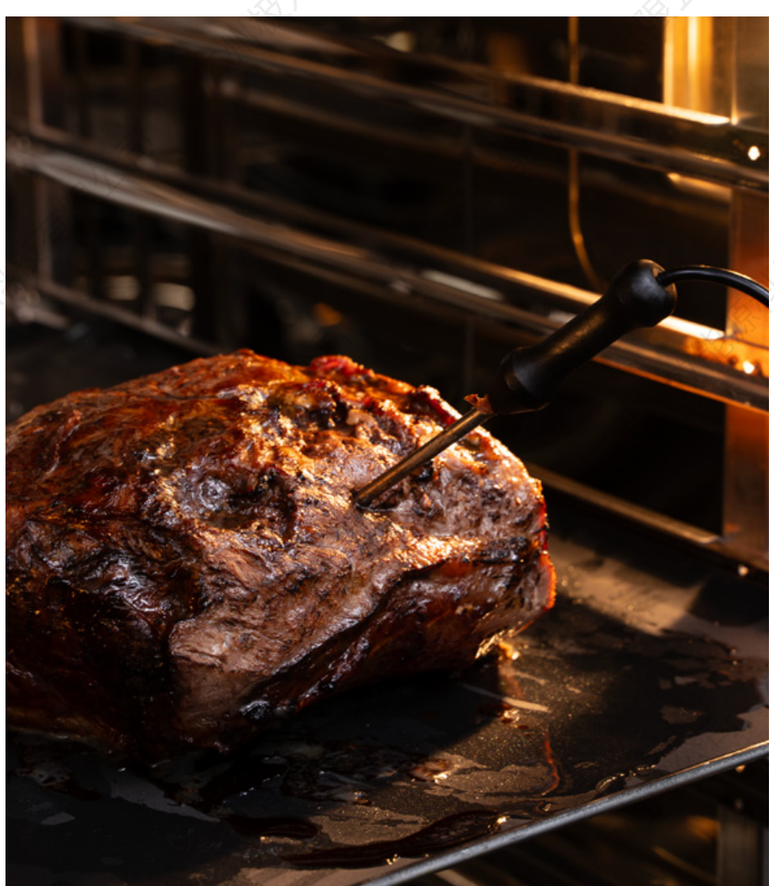



动态空气涡流

Dynamic Air Vortex

高精度、多点感应元件 中心肉针探头

High precision, multi-point sensor probe

内置锅炉蒸汽发生器

Built-in Boiler

版权所有 ©2018–2024 广州极效能源科技有限公司
COPY RIGHT©2018–2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

| 细节 | 决定品质


Quality Makes Us Different
Your Project is in The Best Hands



IOT 无线互联
IOT Wireless Interconnection

智能互联允许通过智能设备实时连接访问您的设备。

Smart connect allows real-time access to your device via any smart device.

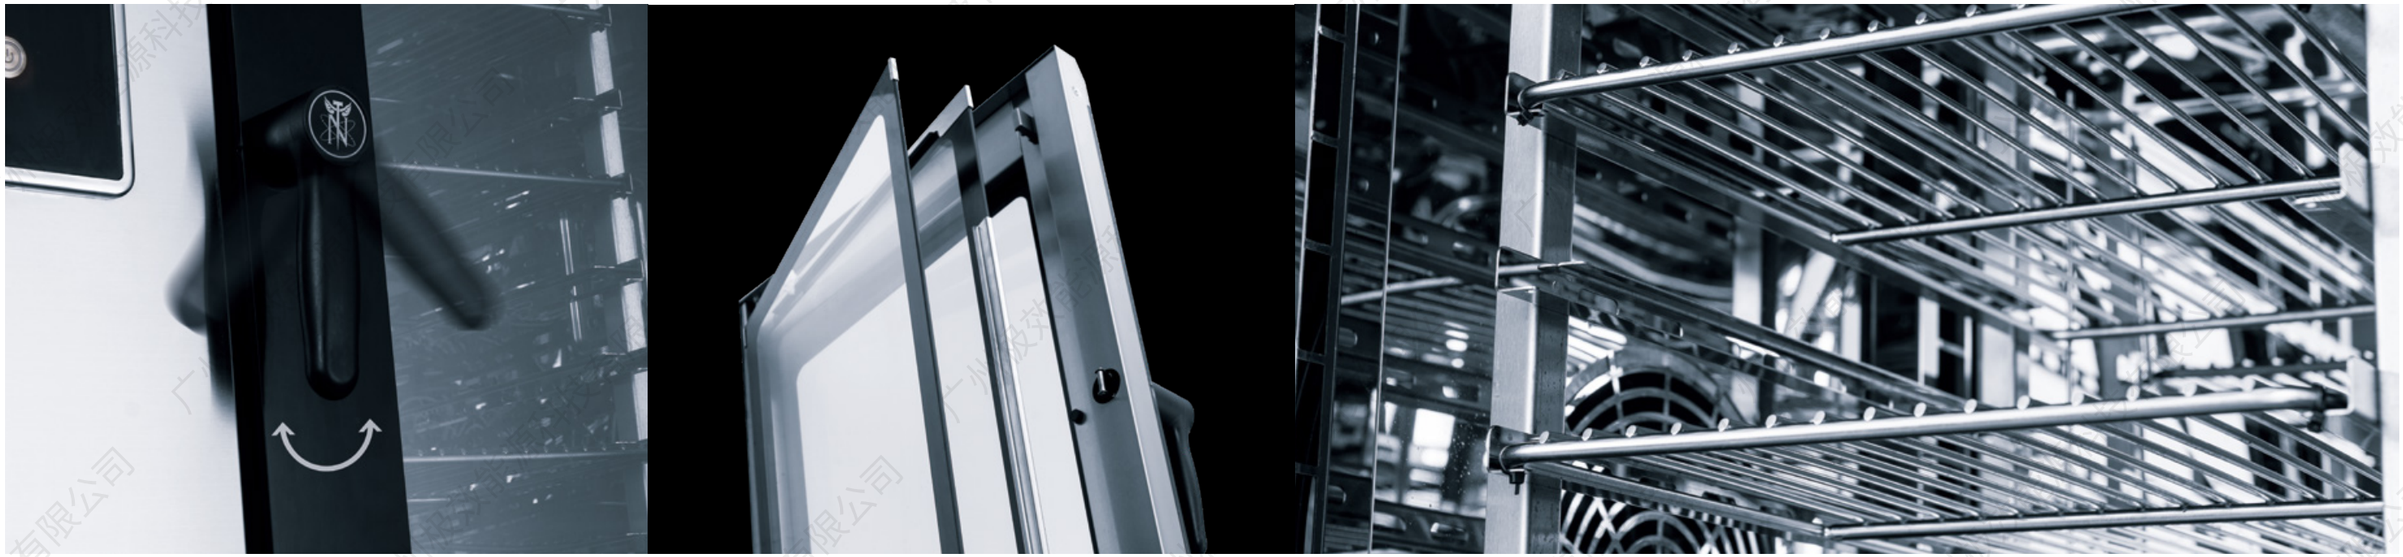

两段开门设计

Two-step
Opening Door

3 层玻璃隔热门

Three Layer of Heat
Insulating Glass

层架模式
各层烹饪时间单独控制

Shelf mode, the cooking time of each layer is controlled separately

产品规格表

Model Table









产品型号 Model	NC2021TI	NC2011TI	NC1011TI	NC1011BLT	NC0611TI	NC0611BLT	NC0423T
名称 Name	40 盘万能蒸烤箱 40-tray combi oven	20 层万能蒸烤箱 20-tray combi oven	10 层万能蒸烤箱 10-tray combi oven	10 层万能蒸烤箱 10-tray combi oven	6 层万能蒸烤箱 6-tray combi oven	6 层万能蒸烤箱 6-tray combi oven	4 层万能蒸烤箱 4-tray combi oven
控制器 Control	7 寸触摸屏 (7" Touch Screen CTL)	7 寸触摸屏 (7" Touch Screen CTL)	7 寸触摸屏 (7" Touch Screen CTL)	7 寸触摸屏 (7" Touch Screen CTL)	7 寸触摸屏 (7" Touch Screen CTL)	7 寸触摸屏 (7" Touch Screen CTL)	7 寸触摸屏 (7" Touch Screen CTL)
产品尺寸 Product Size WxDxH (mm)	1232 x 1069 x 1918	973 x 878 x 1871	963 x 876 x 1152	963 x 876 x 1152	963 x 876 x 943	963 x 876 x 943	744 x 657 x 704
内膛规格 Chamber Size (mm)	736 x 856 x 1510	480 x 660 x 1510	440 x 670 x 735	440 x 670 x 735	440 x 670 x 508	440 x 670 x 508	370 x 460 x 380
包装尺寸 Packing Size WxDxH (mm)	1250 x 1140 x 2050	1010 x 960 x 2010	1020 x 970 x 1300	1020 x 970 x 1300	1020 x 970 x 1090	1020 x 970 x 1090	810 x 750 x 875
电压 / 频率 Voltage & Frequency	380–415V 3N~, 50/60Hz	380–415V 3N~, 50/60Hz	380–415V 3N~, 50/60Hz	380–415V 3N~, 50/60Hz	380–415V 3N~, 50/60Hz	380–415V 3N~, 50/60Hz	380–415V 3N~, 50/60Hz、 220V–240V ~, 50/60Hz
总功率 Rated Power	64.6kW	36.6kW	18.3kW	18.3kW	12.3kW	12.3kW	6.1kW
净重 Net Weight (kg)	428	313	168	168	153	153	75
毛重 Gross Weight (kg)	448	411	215	215	187.5	187.5	113
锅炉 Boiler — 带锅炉 With Boiler	●	●	●	–	●	–	●
锅炉 Boiler — 功率 Boiler Power	45kW	27kW	18kW	–	9kW	–	5.4kW
烘烤功率 Roast Power	64kW	36kW	18kW	18kW	12kW	12kW	5.8kW
容量 Capacity	40 x 1/1GNP	20 x 1/1GNP	10 x 1/1GNP	10 x 1/1GNP	6 x 1/1GNP	6 x 1/1GNP	4 x 2/3GNP
配置网架数 No. of Rack	10	8	4	4	4	4	2

● 有 Yes　　— 无 Nil

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

配件列表
Accessories List

不锈钢盘
SSL Pan



1/1*25mm

尺寸 Size: 530x325x25mm
编码 Code : 907010071

不锈钢盘
SSL Pan



1/1*40mm

尺寸 Size: 530x325x40mm
编码 Code : 907010072

不锈钢盘
SSL Pan



1/1*65mm

尺寸 Size: 530x325x65mm
编码 Code : 907010047

烤网 （外网）
Roasting Rack



1 / 1

尺寸 Size: 530*325mm
编码 Code : 907010091

冲孔不锈钢盘
SSL Perforated Pan



1/1*25mm

尺寸 Size: 530x325x25mm
编码 Code : 907010073

冲孔不锈钢盘
SSL Perforated Pan



1/1*40mm

尺寸 Size: 530x325x40mm
编码 Code : 907010074

冲孔不锈钢盘
SSL Perforated Pan



1/1*65mm

尺寸 Size: 530x325x65mm
编码 Code : 907010075

烤网（内网）
Cooling Rack



1 / 1

尺寸 Size: 470*270mm
编码 Code : 907010092

铝合金不沾冲孔平烤盘
Nonstick Perforated Sheet

1/1*10mm

尺寸 Size: 530*325*10mm
编码 Code : 907010083

不沾冲孔烤盘
Nonstick Perforated Sheet

1/1*25mm

尺寸 Size: 530*325*25mm
编码 Code : 907010079

不沾冲孔烤盘
Nonstick Perforated Sheet

1/1*40mm

尺寸 Size: 530*325*40mm
编码 Code : 907010080

不沾冲孔烤盘
Nonstick Perforated Sheet

1/1*65mm

尺寸 Size: 530*325*65mm
编码 Code : 907010081

铝合金不沾平烤盘
Nonstick Sheet



1/1*10mm

尺寸 Size: 530*325*10mm
编码 Code : 907010082

铝合金不沾烤盘
Nonstick Sheet



1/1*25mm

尺寸 Size: 530*325*25mm
编码 Code : 907010076

铝合金不沾烤盘
Nonstick Sheet



1/1*40mm

尺寸 Size: 530*325*40mm
编码 Code : 907010077

铝合金不沾烤盘
Nonstick Sheet



1/1*65mm

尺寸 Size: 530*325*65mm
编码 Code : 907010078

八孔不沾鸡蛋煎烤盘
Nonstick Egg Pan



1/1

尺寸 Size: 530*325mm
编码 Code : 907010084

双面牛排煎烤板
Reversible Steak Pan



1/1

尺寸 Size: 530*325mm
编码 Code : 907010085

超级薯条炸篮
Fries basket



1/1

尺寸 Size: 530*325mm
编码 Code : 907010086

烤鸭挂架
Duck Roast Rack




编码 Code : 915010075

配件列表
Accessories List

NopeinCombi® 万能蒸烤箱

六头烤鸡架
Chicken Roast Rack (6)



1/1

尺寸 Size: 530*325mm
编码 Code : 907010087


八头烤鸡架
Chicken Roast Rack (8)



1/1

尺寸 Size: 530*325mm
编码 Code : 907010088

十头烤鸡架
Chicken Roast Rack (10)



1/1

尺寸 Size: 530*325mm
编码 Code : 907010089

土豆烤架
Potato Roast Rack



1 / 1

尺寸 Size: 530*325mm
编码 Code : 907010090

不锈钢盘
SSL Pan



2/3*25mm

尺寸 Size: 325*354*25mm
编码 Code : 907010096

不锈钢盘
SSL Pan



2/3*40mm

尺寸 Size: 325*354*40mm
编码 Code : 907010097

不锈钢盘
SSL Pan



2/3*65mm

尺寸 Size: 325*354*65mm
编码 Code : 907010062

不锈钢烤网（外网）
SSL Roasting Rack



1 / 1

尺寸 Size: 325*354mm
编码 Code : 907010106

不锈钢盘
SSL Pan



2/3*25mm

尺寸 Size: 325*354*25mm
编码 Code : 907010093

不锈钢盘
SSL Pan



2/3*40mm

尺寸 Size: 325*354*40mm
编码 Code : 907010094

不锈钢盘
SSL Pan



2/3*65mm

尺寸 Size: 325*354*65mm
编码 Code : 907010095

蒸烤箱底座
Stand



尺寸 Size: 682*842*638mm
515*640*638mm
编码 Code : 10401010001

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3*10mm

尺寸 Size: 325*354*10mm
编码 Code : 907010105

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3*25mm

尺寸 Size: 325*354*25mm
编码 Code : 907010101

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3*40mm

尺寸 Size: 325*354*40mm
编码 Code : 907010102

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3*65mm

尺寸 Size: 325*354*65mm
编码 Code : 907010103

铝合金不沾平烤盘
Nonstick Pan



2/3*10mm

尺寸 Size: 325*354*10mm
编码 Code : 907010104

铝合金不沾烤盘
Nonstick Pan



2/3*25mm

尺寸 Size: 325*354*25mm
编码 Code : 907010098

铝合金不沾烤盘
Nonstick Pan



2/3*40mm

尺寸 Size: 325*354*40mm
编码 Code : 907010099

铝合金不沾烤盘
Nonstick Pan



2/3*65mm

尺寸 Size: 325*354*65mm
编码 Code : 907010100

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

热风循环烧烤炉

NCR-12/16

ELECTRIC CONVECTION ROASTER



自动清洗功能
AUTOMATIC CLEANING
一键自动清洗，两种内膛清洗模式
One-key automatic cleaning, two cleaning modes for chamber

版权所有 ©2018-2024 广州极效能源科技有限公司
COPY RIGHT©2018-2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

功能特点 | Features

- 系统操作权限分级管理，日常操作、管理者权限及后台大数据分析诊断三级权限
- 烹饪计数及设备锁止功能，可满足终端用户个性化需求和租赁业务应用
- 温度范围广，30℃-300℃之间，可以烤制烤鸭，烧腊，烤乳鸽等
- 从室温（25℃）到预设温度（177℃）约 7 分钟
- 操作控制器可编程功能
- 每道烹饪（程序）最多可设置 9 个步骤，每个步骤可独立控制时间、温度、风机速度、排湿，可以满足较复杂烤制要求
- 最多可储存 16 道快捷菜单
- 多段风速，正反转高温电机，内膛温度更加均匀
- 强制降温功能，大大降低等待的时间
- 一键自动清洗，两种内膛清洗模式
- 具有保温功能，烘烤、保温二合一
- 二级开门门锁，开门即停止工作，更安全
- 三层玻璃门，保温和隔热效果更佳，防止高温烫伤
- 内膛拐角圆弧过渡，易于清洁，没有卫生死角
- 高效率的鼓风机，噪音极小，涡流送风，温度均匀
- 高效能保温材料，全方位隔热，节能省电
- 额外标配清洗水枪

- Hierarchical management of system operation authority, three levels of authority for daily operation, manager authority and background big data analysis and diagnosis
- Cooking counting and equipment locking functions can meet the individual needs of end users and rental business
- Wide temperature range, between 30℃ -300℃ , can roast duck, roast pork, roast pigeon, etc
- It takes about 7 minutes from room temperature (25℃) to preset temperature (177℃)
- Programmable controller
- Each cooking (program) can set up to 9 stages, and each stage can independently control the time, temperature, fan speed, and moisture removal, which can meet the more complex roasting requirements
- Up to 16 menus can be stored
- Multi-stage wind speed, forward and reverse high temperature motor, the temperature of the inner chamber is more uniform
- Forced cooling function, greatly reducing waiting time
- One-key automatic cleaning, two cleaning modes for chamber
- With holding function, roasting and holding are two in one
- The two-step door lock, which ensures oven stop working when the door is opened, is safer
- Three-layer glass door, better heat preservation and heat insulation, prevent high temperature scald
- The corners of the inner chamber have arc structure, which are easy to clean
- High-efficiency blower, low noise, vortex air supply, uniform temperature
- High-efficiency thermal insulation material, comprehensive thermal insulation, energy and electricity saving
- Standard cleaning water gun



NCR-16

每道烹饪（程序）最多可设置 9 个步骤，每个步骤可独立控制时间、温度、风机速度、排湿，可以满足较复杂烤制要求。

Each cooking (program) can set up to 9 stages and each step can independently control time, temperature, fan speed, and moisture removal, which can meet more complex roasting requirements.

产品型号 Model	NCR-12		NCR-16
名称 Name	热风循环烧烤炉 Electric Convection Roaster		热风循环烧烤炉 Electric Convection Roaster
控制器 Control	电子控制器 Digital CTL		电子控制器 Digital CTL
产品尺寸 Product Size WxDxH (mm)	960 x 851 x 1152		1222 x 1036 x 1154
内膛规格 Chamber Size (mm)	440 x 670 x 735		740 x 830 x 780
电压 / 频率 Voltage & Frequency	380-415V 3N~, 50/60Hz		380-415V 3N~, 50/60Hz
温度范围 (℃) Temp.Range	30~300℃		30~300℃
烘烤功率 Power	10.8kW	18kW	18kW
容量 Capacity	9 只烤鸭 (9 Duck)		16 只烤鸭 (16 Duck)
总功率 Rated Power	11.1kW	18.3kW	18.3kW
包装尺寸 Packing Size WxDxH (mm)	1020*970*1300		1250*1160*1280
净重 Net Weight (kg)	162		221
毛重 Gross Weight (kg)	202		326.5

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

微波智能烧烤炉

NT-ProR

ELECTRIC MICROWAVE ROASTER



版权所有 ©2018-2024 广州极效能源科技有限公司
COPY RIGHT©2018-2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

功能特点 | Features

- 本炉采用全不锈钢结构，外型美观大方
- 内胆采用圆弧过渡连接，不藏垃圾，易于清洁
- 采用涡流风扇送风加热，有高低两种速度可供选择，且风机定时正反转，加热更均匀，保证烹制的食品色、香、味俱全
- 配有加湿功能，能根据食品的要求进行设置

  电脑板采用电子式电脑板，操作直观，控制精准
- 具有储存功能，可以记忆 30 个菜单，操作者可将常用菜单预先编制好，储存在电脑板中
- 具备自动清洗功能，清洗程序已预先写好，也可根据内膛的清洁度自行编制清洗程序，清洗时只须长按清洗键 3 秒即可启动

- This roaster's exterior is made entirely of stainless steel
- to ensure long-lasting durability

  The inner chamber adopts arc transition connection, no garbage, easy to clean
- Eddy current fan is to supply air for heating.Two speeds can be chosen. The positive run and back run fan makes heating more even to ensure that the cooked food color, fragrance, taste are complete
- The humidification function can be set according to the requirements of food. Equipped with electronic computer board, the control is accurate
- It can memorize 30 menus
- The automatic cleaning function. The cleaning procedure has been written in advance, and can also prepare the cleaning procedure according to the cleanliness of the chamber. The cleaning can be started by pressing the cleaning key for 3 seconds



微波和热风冲击混合加热
COMBINATION OF MICROWAVE & IMPINGEMENT



每道烹饪（程序）最多可设 置 6 个步骤，每个步骤可独 立控制时间、温度、风机速 度、微波，可以满足较复杂 烤制要求。

Each cooking (program) can be set up to 6 stages and each stage can independently control time, temperature, fan speed, microwave. It can meet more complex roasting.



额外标配清洗水枪
Standard cleaning water gun

产品型号 Model	NT-ProR
名称 Name	微波智能烧烤炉 Electric Microwave Roaster
控制器 Control	电子控制器 Digital CTL
产品尺寸 Product Size WxDxH (mm)	1030 × 841 × 1327
内膛规格 Chamber Size (mm)	482 × 641 × 775
电压 / 频率 Voltage & Frequency	380V 50Hz
温度范围 (℃) Temp.Range	30~300℃
容量 Capacity	9 只烤鸭 (9 Duck)
总功率 Rated Power	18.3kW
最大食品装载量 (kg) Capacity	6 只鸭 (约 30kg) 6 Duck, about 30kg

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

版权所有 ©2018–2024 广州极效能源科技有限公司
COPY RIGHT©2018–2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.



歌兰德炸炉系列

GRANDFRYER® series



IOT WIRELESS INTERCONNECTION

IOT 无线互联

智能互联允许通过智能设备实时连接访问您的设备。

Smart connect allows real-time access to your device via any smart device.

GRANDFRYER® 歌兰德炸炉系列旨在向专业级用户提供精准、节能、口感一致的烹饪解决方案。其配备的智能电脑控制板，其存储的每个菜单均由 FLEX SMART® COOKING 精准控制和多段烹饪智能控制，操作简单，专业级出品品质，口感一致，不因操作者差异而影响出品。

GRANDFRYER® Series fryer provides precise control, energy saving and consistency of cooking result for commercial kitchen. It is equipped with intelligent control panel, every stage of a menu is perfectly controlled by FLEX Smart® Cooking system. It has user-friendly simple operation, professional outcomes, consistent food texture which is not affected by different operators.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

单双槽电炸炉
ELECTRIC DEEP FRYER



免工具拆卸炸篮挂板，方便清洁


Toolless removable hanger mounted on the back splash for baskets



内置滤油系统

不但节约了使用空间，而且在保证烹炸食物保持高质量出品同时，还极大延长了油品的使用寿命，降低运营成本

The built-in oil filtering system not only saves the space, but also ensures that the fried food maintains high-quality outcome, while also greatly extending the service life of the oil and reducing operating costs

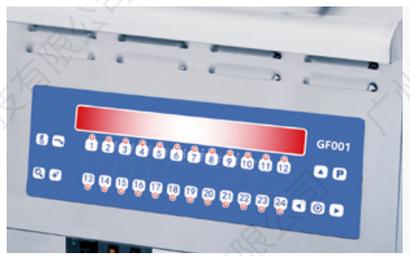

电脑板控制，多达 24 个菜单存储能力，任意调用

Computer board control, up to 24 menu storage capabilities, arbitrary call



低功率密度且热效率极高的带状加热管

能够快速回温，实现食物表面金黄酥脆且保持内部水分不流失的效果

Flat-bar heating element transfers heat more efficiently. With snap-action probe, heating element(s) heats up rapidly when it detects a change in the load and/or a drop in temperature, which helps to return to proper temperature faster

To achieve the effect that the surface of the food is golden and crispy and keep the internal moisture not lost

CE

功能特点 | Features

- 超高的能效与生产能力
- 全不锈钢油缸与柜体，表面精细喷砂处理
- 多种油缸尺寸可供选择，满足您的运营需求
- 可翻转的带状加热管易于清洁
- 电脑板控制，多达 24 个菜单存储能力，任意调用
- 温度探头精度达到 ±1℃
- 温度范围 :195 ℉ (91℃) 到 385 ℉ (196℃)
- 1-1/2”的泄油阀快速泄油，防止堵塞
- 配备高温保护开关、防倾斜开关、泄油阀开关
- 24V 弱电控制系统更加安全
- 冷油区防止食物碎屑碳化
- 9 寸调节脚及万向轮稳定可靠
- 免工具拆卸炸篮挂板，方便清洁
- 配置：2 个分槽炸篮
- 可选配 IOT 功能

- Super high energy efficiency and production capacity
- All stainless steel structure with beadblast finished surface, and food grade steel frypot
- Numerous size of frypot for options to match different product frying applications
- Swing-up heating element, cleaning is much more easier
- Up to 24 programmable menu items
- Durable and snap-action probe with high grade accuracy ±1℃
- Frying temperature range from 195 ℉ (91℃) to 385 ℉ (196℃)
- 1-1/2” drain valve
- Equipped with hi-limit switch, anti-tilt switch, drain valve switch
- Safe with 24V low current control system
- Wide frypot (s) with cool zone design, helping collect food debris and prevent it carbonized
- Furnished with 9” heavy duty legs in front and bearing wheel castors with brakes in rear
- Toolless removable hanger mounted on the back splash for baskets
- Twin size baskets
- Optional IOT function



整锅、分锅设计 Full vat or splited vat design
滤油系统可选 Oil filtration system available for option

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

Model Table

产品规格表








产品型号 Model	NTP14EF	NTP14ESF	NTP184EF	NTP14-2LSEF	NTP7-3EF	NTP7-4EF
名称 Name	Full Vat Electric Fryer with Filtration System 单槽滤油电炸炉	Dual Vat Electric Fryer with Filtration System 双槽滤油电炸炉	Full Vat Electric Fryer with Filtration System 单槽滤油电炸炉	Three Vat Electric Fryer with Filtration system 三槽滤油电炸炉	Three Vat Electric Fryer with Filtration System 三槽滤油电炸炉	Four Vat Electric Fryer with Filtration System 四槽滤油电炸炉
产品尺寸 Product Size WxDxH (mm)	434 x 797 x 1143	434 x 797 x 1143	507x797x1143	870 x797 x1143	653x797x1143	870x797x1143
烹饪区域 Cooking Area WxDxH (mm)	355x420x120	177x420x120/ 分槽	450x420x120	177x420x120/ 分槽 355x420x120/ 全槽	177x420x120/ 分槽	177x420x120/ 分槽
容量 Capacity (Liter)	30L	15L *2	37.8L	15L*2+30L	15L*3	15L*4
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 240V 3~, 50/60Hz	380-415V 3N~ , 240V 3N~,50/60Hz	380-415V 3N~ , 240V 3N~,50/60Hz
额定功率 Rated Power (kW)	14kW	7kW x2	17kW	28kW（7+7+14）kW	7kW x3	7kW x4
控制方式 CTL	电脑板 computer	电脑板 computer	电脑板 computer	电脑板 computer	电脑板 computer	电脑板 computer
预存菜单 Menu No.	24	12/ 槽	24	24	8/ 槽	12/ 槽
防水等级 IP Rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W	220-240V~, 50/60Hz, 250W	220-240V~, 50/60Hz, 250W	220-240V~ , 50/60Hz, 250W	220-240V~ , 50/60Hz, 250W	220-240V~ , 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional	可选 Optional	可选 Optional	可选 Optional	-	可选 Optional
包装尺寸 Packing Size WxDxH (mm)	890x520x1300	890x520x1300	900x593x1300	980x910x1300	904x755x1300	980x910x1300
净重 Net Weight (kg)	100	106	105	176	143	188
毛重 Gross Weight (kg)	120	126	132	206	175	230








产品型号 Model	NTP14E	NTP14ES	NTP184E	NTP14-2EF	NTP184-2EF	NTP184-3EF
名称 Name	Full Vat Electric Fryer 单槽电炸炉	Dual Vat Electric Fryer 双槽电炸炉	Full Vat Electric Fryer 单槽电炸炉	Dual Vat Electric Fryer with Filtration system 双槽滤油电炸炉	Dual Vat Electric Fryer with Filtration system 双槽滤油电炸炉	Three Vat Electric Fryer with Filtration system 三槽滤油电炸炉
产品尺寸 Product Size WxDxH (mm)	434 x 797 x 1143	434 x 797 x 1143	507 x 797 x 1143	870 x 797 x 1143	1014x797x1143	1521x797x1143
烹饪区域 Cooking Area WxDxH (mm)	355 x 420 x 120	177x420x120/ 分槽	450 x 420 x 120	355 x 420 x120/ 全槽	450x420x120/ 全槽	450x420x120/ 全槽
容量 Capacity (Liter)	30L	15L x2	37.8L	30L x2	37.8L x2	37.8L x3
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 220-240V 3~, 50/60Hz	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power (kW)	14kW	7kW*2	17kW	28kW (14kW x2)	17kW x2	17kW x3
控制方式 CTL	电脑板 computer	电脑板 computer	电脑板 computer	电脑板 computer	电脑板 computer	电脑板 computer
预存菜单 Menu No.	24/ 槽	12/ 槽	24/ 槽	24/ 槽	24/ 槽	24/ 槽
防水等级 IP Rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
滤油系统 Filtration System	-	-	-	220-240V~, 50/60Hz, 250W	220-240V~, 50/60Hz, 250W	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional	可选 Optional
包装尺寸 Packing Size WxDxH (mm)	890x520x1092	890x520x1092	900x593x1300	980x910x1300	910x1120x1300	1625x910x1300
净重 Net Weight (kg)	82	85	84	168	175	251.5
毛重 Gross Weight (kg)	102	105	110	198	208	333

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

版权所有 ©2018–2024 广州极效能源科技有限公司
COPY RIGHT©2018–2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD



精准控制·操作简单

PRECISION CONTROL · EASY OPERATION

NTG14E

经济型单槽电炸炉

ELECTRIC FRYER









功能特点 | Features

- ◎ 超高的能效与生产能力
- ◎ 全不锈钢油缸，表面精细喷砂处理
- ◎ 烹饪区域：14.9”*14.3”*3.2“（380*363*80mm）
- ◎ 带状加热管
- ◎ 电子温控器
- ◎ 温度探头精度达到 ±1℃
- ◎ 温度范围：150（65.6℃)~375 华氏度 (191℃)
- ◎ 1–1/2”的泄油阀快速泄油，防止堵塞
- ◎ 配备高温保护开关、泄油阀开关
- ◎ 冷油区防止食物碎屑碳化
- ◎ 6”调节脚稳定可靠（可选万向轮）
- ◎ 可拆卸清洗的炸篮挂板，无需任何工具
- ◎ 炸篮的选择：2 个分槽炸篮 或 1 个全槽炸篮

- ◎ Super high energy efficiency and production capacity
- ◎ All stainless steel structure with bead blast finished surface
- ◎ Large cooking area 14.9”*14.3”*3.2”（380*363*80mm）
- ◎ Flat–bar heating element, heat transfers more efficiently
- ◎ Electronic thermostat
- ◎ Temperature probe accuracy reaches ±1℃
- ◎ Temperature range from 150˚F–375˚F (65.6℃ ~191℃)
- ◎ 1–1/2” drain valve
- ◎ Equipped with hi–limit switch, drain valve switch
- ◎ Wide frypot with cool zone, to prevent carbonization
- ◎ 6” adjustable heavy duty legs(bearing wheel castors are available for option)
- ◎ Toolless removable hanger mounted on the backsplash for baskets
- ◎ Twin size baskets or one full size basket are available for option

产品型号 Model	NTG14E	
产 品 尺 寸 Product Size WxDxH (mm)	434 x 713 x 1006	
烹饪区域 Cooking Area. WxDxH (mm)	380 x 363 x 80	
容 量 Capacity (Liter)	21L	
电压 Voltage	240V 3~, 415V 3N, 50/60Hz	220V 3~, 380V 3N, 50/60Hz
额 定 功 率 Rated Power (kW)	14kW	11.8kW
控制方式 CTL	电子温控器 Solid–state Control	
预存菜单 Menu	–	
防 水 等 级 IP Rating	IPX4	
滤油系统 Filtration System	–	
包装尺寸 Packing Size WxDxH (mm)	810x530x1130	
净重 Net Weight (kg)	49	
毛重 Gross Weight (kg)	64	

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

NTT10E/NTT10-2E

单双槽台上式炸炉
COUNTERTOP FRYER





功能特点 | Features

- ◎ 全不锈钢结构
- ◎ 一体拉伸油缸，冷油区设计
- ◎ 可编程电脑板，可预存 4 个菜单
- ◎ RTD 感温探头
- ◎ 低功率密度带状发热管，热传导更加均匀快捷，寿命更加长
- ◎ 控温范围：85~385°F（29~196℃）
- ◎ 3/4 寸放油阀
- ◎ 高温保护开关
- ◎ 防倾斜开关
- ◎ 发热管可翻转清洗
- ◎ 烹饪区域：257*340mm
- ◎ 油量：10L/ 槽
- ◎ 烹饪完毕蜂鸣提醒
- ◎ 标配炸篮 1 个 / 槽

- ◎ Stainless steel construction
- ◎ One-piece deep-drawn frypot, food hygiene design with cold zone
- ◎ Programmable computer with a max. of 4 menu items
- ◎ RTD temperature probe
- ◎ Flat-bar heating element, low watt density and providing even heat distribution and longer service life
- ◎ Swing-up heating element makes cleaning a snap
- ◎ Cooking temperature ranges from 85~385°F（29~196℃）
- ◎ 3/4 inch drain valve
- ◎ Oil capacity: 10L per vat
- ◎ Hi-limit switch, anti-tilt switch
- ◎ Cooking area 257*340mm
- ◎ Buzz when cooking done
- ◎ One frying basket per vat








设备名称 Name	NTT10E			NTT10-2E		
产品型号 Model	单槽台上式炸炉 Single Vat Countertop Fryer			双槽台上式炸炉 Dual Vat Countertop Fryer		
产品尺寸 Product Size WxDxH (mm)	350x700x510			680x700x510		
烹饪区域 Cooking Area WxDxH (mm)	257x340x60			257x340x60/ 槽 (vat)		
容量 Capacity (Liter)	10L			10L x2		
电压 / 功率 Voltage & Power (kW)	380V 3N~ 50Hz	400V 3N~ 50Hz	240V 3N~ 60Hz	380V 3N~ 50Hz	400V 3N~ 50Hz	240V 3N~ 60Hz
	5.5kW	6kW	6.5kW	11kW	12kW	13kW
控制方式 CTL	电脑板 Computer			电脑板 Computer		
预存菜单 Menu No.	4			4		
防水等级 IP Rating	IPX3			IPX3		
包装尺寸 Packing Size WxDxH (mm)	384x780x578			714x780x578		
净重 Net Weight (kg)	22.5			38.5		
毛重 Gross Weight (kg)	25			44		

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

NTT8E

台上式升降炸炉
AUTO-LIFT COUNTERTOP FRYER







功能特点 | Features

- ◎ 全不锈钢结构
- ◎ 油缸可拆卸，便于清洁
- ◎ 自动升降功能，一键操作，全自动完成食物的油炸烹饪
- ◎ 可编程电脑板，3 段烹饪，9 个预存菜单 +1 个临时餐单
- ◎ 重载、超重载烹饪控制
- ◎ 控温范围：76~391°F（25~200℃）
- ◎ 高温保护开关
- ◎ 防倾斜开关
- ◎ 发热管可翻转清洗
- ◎ 烹饪完毕蜂鸣提醒
- ◎ 标配炸篮 1 个 / 槽
- ◎ 220V 16A, 配带插头电源线 2 米

- ◎ Stainless steel construction
- ◎ Removable oil vat for easy cleaning
- ◎ Basket automatically lift-up when cooking done
- ◎ 9 menu key pads (+1 temporary menu), 3 programmable stages for each cooking cycle
- ◎ Automatically extend cooking time when adding extract portions
- ◎ Temperature range:76~391°F（25~200℃）
- ◎ Hi-Limit switch
- ◎ Anti-Tilt switch
- ◎ Swing-up heating element makes cleaning a snap
- ◎ Buzz when cooking done
- ◎ Standard configuration: 1 basket/vat
- ◎ 220V 16A with plug power cord 2 meters

使用场所 GOOD FOR

西式快餐店、中式快餐店、日本料理、酒店、餐厅、面包房、便利店等等
Western-style Fast Food Restaurant, Chinese Fast Food Restaurant, Japanese Cuisine, Hotel, Light Dining, Bakery, Convenience Store, etc.

产品型号 Model	NTT8E
产品尺寸 Product Size WxDxH (mm)	351 x 576 x 426
烹饪区域 WxDxH (mm)	240 x 300 x 100
电压 / 频率 Voltage & Frequency	220-240V ~, 50/60Hz
额定功率 Rated Power (kW)	3.2kW
预存菜单 Menu No.	9
防水等级 IP Rating	IPX3
包装尺寸 Packing Size WxDxH (mm)	645 x 345 x 555
净重 Net Weight (kg)	17
毛重 Gross Weight (kg)	19.5

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司



版权所有 ©2018-2024 广州极效能源科技有限公司
COPY RIGHT©2018-2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

履带式电热披萨炉

GRANDOVEN® series

IOT

IOT WIRELESS INTERCONNECTION

IOT 无线互联

智能互联允许通过智能设备实时连接访问您的设备。

Smart connect allows real-time access to your device via any smart device.

NTE-1620 是 GRANDOVEN® 电力履带式烘炉系列产品之一，紧凑的设计令它非常适合厨房不大的连锁店或者外带类快捷服务店使用，同时因它可层叠式的设计（可堆叠 2 层），令用户在节省空间同时满足用餐高峰时段的出品需求。

NTE-1620 is one of GRANDOVEN® series electric baking oven. It is ideally suited for express-style or chain restaurants where smaller ovens are required yet provide high baking output as its self-contained, conveyorized and stackable up to two (2) units high.

使用场所 GOOD FOR

披萨连锁店 / 轻食品店 / 烤鱼连锁店 / 主题餐厅后厨 / 便利店 / 酒吧 / 开胃食品及小食品的制作 / 小型披萨店 / 外带便捷店等等。

Pizza Chains, Simple Light Food Store, Roast Fish Chains, Theme Restaurant, Convenient Store, Bar Snack Shops, Pizza stores, Take-away stores, etc.


可烹饪菜单 COOKING MENU

各种披萨 / 鸡翅 / 焗饭等等

Pizza, Chicken wings, Baked Rice, etc.





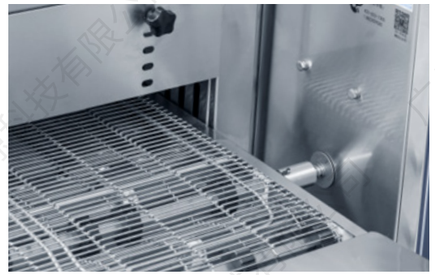



NTE-1620-V



NTE-2090



NTE-2060



NTE-32101-T

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

履带式电热披萨炉

NTE-32101-T

ELECTRIC CONVEYOR OVEN



优化风道，高效节能
High Efficent and Low Energy Consumption

采用进口耐高温特殊混流涡轮风叶，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，热效率非常高。

The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.

功能特点 | Features

- 热风冲击加热技术，通过热风喷流技术和环流热风循环作用于食物表面，使得 食物加热更加迅速，口感更加松脆
- 可堆叠摆放，节省空间，同时满足高峰时段出品需求
- PID 算法微处理器，精确控制烘焙时间和传送带速度
- 烘焙内胆长度 1028mm, 传送链宽 813mm, 长 1936mm
- 全不锈钢结构，更符合食品卫生要求
- 正面钢化玻璃视窗，不锈钢把手，清洁更加容易
- 落地式设计，5 寸带刹重型脚轮
- 免工具拆卸链网
- 传送带正反转功能
- 5 寸触摸屏

- Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
- Can be stacked to save space while meeting production requirements during peak hours
- With PID Microprocessor controller, baking temperature and time are always under perfect control
- 1028mm long cooking chamber with 813mm belt width and 1936mm Length
- All stainless steel structure, comply with food hygiene requirements
- Floor-type design with 5” heavy duty castors, all with brakes
- Toolless-open access panels
- Reversible conveyor direction
- 5 inch touch screen



操作简便，控制精准
Simply and easy operation.



落地式设计，5 寸带刹重型脚轮
Floor-type design with 5” heavy duty castors, all with brakes

产品型号 Model		NTE-32101-T
宽 Width (mm)		2048
深 Depth (mm)		1410
总高 Overall Height (mm)	单层 Single Stack	1186
	双层 Double Stack	1542
	三层 Tri-Stack	1969
最高温度 Max Operation Temp		300℃
功率 Power	每层 (Per Deck)	27kW
时间调节 Bake Time Range		1 ～ 14 分钟 (minutes)
电压 Volts		380V 3N ～
频率 Hz		50Hz
防水等级 IP Rating		IPX3
包装尺寸 Packing Size WxDxH (mm)		2160x1580x824
净重 Net Weight (kg)		419
毛重 Gross Weight (kg)		498

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

履带式电热披萨炉

ELECTRIC CONVEYOR OVEN



NTE-2060



NTE-2060-T

上下热风冲击加热技术
Hot Air Impingement Technology

通过热风喷流技术和环流热循环作用于食物表面，上封板高度可调。

The hot air jet technology and circulating heat circulation act on the food surface, and the height of the upper sealing plate is adjustable.



NTE-2090



NTE-2090-T







功能特点 | Features

- 热风冲击加热技术，通过热风喷流技术和环流热风循环作用于食物表面，使得食物加热更加迅速，口感更加松脆
- 正面钢化玻璃视窗，不锈钢把手，清洁更加容易
- 挡风板高度可调，从而降低热量损失，减少食材大小的局限性
- 最高可堆叠 3 层，节省空间，同时满足更大量的出品需求
- PID 算法微处理器，精准控制烘焙温度和传送带速度，烘焙品质极佳
- 全不锈钢结构，更符合食品卫生要求
- 落地式设计，5 寸带刹重型脚轮
- 免工具拆卸面板
- 传送带正反转功能

- Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
- Front-access window, robust stainless steel handle
- The height of the windshield is adjustable to reduce heat loss and reduce the limitation of the size of the food
- Stackable up to 3 units high
- With PID Microprocessor controller, baking temperature and time are always under perfect control
- All stainless steel structure, comply with food hygiene requirements
- Floor-type design with 5” heavy duty castors, all with brakes
- Toolless-open access panels
- Reversible conveyor direction



产品型号 Model		NTE-2060	NTE-2060-T	NTE-2090	NTE-2090-T
控制方式 CTL		CTT+ 按键型 (Digital CTL)	5 寸触摸屏 (5” Touch Screen CTL)	CTT+ 按键型 (Digital CTL)	5 寸触摸屏 (5” Touch Screen CTL)
宽 Width (mm)		1173 (含两边挡板 :1599 with extention sheet plates)		1533 (含两边挡板 :1927 with extention sheet plates)	
深 Depth (mm)		1078		1124	
总高 Overall Height (mm)	单层 Single Stack	1061		1125	
	双层 Double Stack	1528		1592	
	三层 Tri-Stack	1760		1759	
烘焙内胆长度 long Cooking Chamber (mm)		610		910	
传送链宽 Belt Width (mm)		530		530	
最高温度 Max. Operation Temp.		300℃		300℃	
功率 Power	每层 (Per Deck)	12.3kW		17kW	
时间调节 Bake Time Range		2~14 分钟 (minutes)		1~14 分钟 (minutes)	
电压 Volts		380-415V 3N~, 220-240V 3N~		380-415V 3N~, 220-240V 3N~	
频率 Hz		50/60Hz		50/60Hz	
防水等级 IP Rating		IPX3		IPX3	
包装尺寸 Packing Size WxDxH (mm)		1250x1180x650		1670x1230x780	
净重 Net Weight (kg)		170		260	
毛重 Gross Weight (kg)		202		306	

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

履带式电热披萨炉

ELECTRIC CONVEYOR OVEN



NTE-1620-T



NTE-1620-V

优化风道，高效节能
High Efficent and Low Energy Consumption

采用进口耐高温特殊混流涡轮风叶，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，热效率非常高。

The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.



全不锈钢结构，更符合食品卫生要求
All stainless steel structure, comply with food hygiene requirements



操作简便，控制精准
Simply and easy operation.

功能特点 | Features

- 热风冲击加热技术。通过热风喷流技术和环流热风循环作用于食物表面，使得食物加热更加迅速，口感更加松脆
- 采用特殊混流涡轮风轮，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，烘焙效果更加出色
- 挡风板高度可调，从而降低热量损失，减少食材大小的局限性
- 可堆叠摆放，节省空间，同时满足高峰时段出品需求
- OPD 算法微处理器，精确控制烘焙时间和传送带速度，温控更加精准烘焙
- 全不锈钢结构，更符合食品卫生要求
- 内置催化剂具备除臭，抗污染功能
- 传送带尺寸可选：32 寸 /37 寸 /50 寸
- 标配 4 寸重力脚
- 免工具拆卸链网
- 传送带正反转功能
- 5 寸触摸屏
- 座台式设计

- Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
- The special mixed-flow turbine wind wheel is used to integrate the properties of axial flow and circulation, so that the high-temperature airflow has DC impact and uniformity of circulation, and the baking effect is even better
- The height of the windshield is adjustable to reduce heat loss and reduce the limitation of the size of the food
- Can be stacked to save space while meeting production requirements during peak hours
- With OPD Microprocessor controller, baking temperature and time are always under perfect control
- All stainless steel structure, comply with food hygiene requirements
- Conveyor belt size optional: 32 inches / 37 inches / 50 inches
- Furnished with 4” heavy duty legs
- Toolless-open access panels
- Reversible conveyor direction
- 5 inch touch screen
- Countertop design

产品型号 Model		NTE-1620-T	NTE-1620-V
宽 Width (mm)		1032(含两边挡板 :1400 with extention sheet plates)	1000(含两边挡板 :1400 with extention sheet plates)
深 Depth (mm)		826	826
总高 Overall Height (mm)	单层 Single Stack	467	467
	双层 Double Stack	838	837
烘焙内胆长度 long Cooking Chamber (mm)		518	518
传送链宽 Belt Width (mm)		436	436
最高温度 Max. Operation Temp.		300℃	300℃
功率 Power	每层 (Per Deck)	6.7kW	6.7kW
时间调节 Bake Time Range		1‘25”~11 分钟 (minutes)	1‘25”~11 分钟 (minutes)
电压 Volts		380-415V 3N~, 220-240V ~	380-415V 3N~, 220-240V ~
频率 Hz		50/60Hz	50/60Hz
防水等级 IP Rating		IPX3	IPX3
包装尺寸 Packing Size WxDxH (mm)		1100x950x620	1100*920x620
净重 Net Weight (kg)		85	85
毛重 Gross Weight (kg)		107	107

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

NTF20-1SL/NTF20-1D

链式烤鱼炉

CONVEYOR FISH ROASTER



功能特点 | Features



- 高温高效无烟电热管，热辐射超 600℃，工作最高温度 450℃，超温保护
- 模块化设计，上下层堆叠，节省空间，满足大批量出品需求，独立控制，确保营业不间断
- PID 算法微处理器，精确控制烘烤温度和传送带速度，烘烤品质极佳
- 烘烤内膛长度 830mm，传送链宽 530mm，适合各种食材烘烤
- 大容量水盆，确保食物嫩而不柴，接油降温，杜绝火患，水满自溢，一键式电磁阀供水
- 双散热风扇，炉体体表低温，电器元件寿命长，指示灯实时监控发热管信息
- 超厚环保保温棉，上下温差浮动 3℃，内膛上部独特设计聚能板，高效节能
- 选配食材烘烤计数功能，后台 wifi 数据传送查询，方便各营业点数据收集管控
- 全不锈钢结构，更符合食品卫生要求
- 落地式设计，5 寸带刹重型脚轮
- 传送带正反转功能

- High-temperature and high-efficiency smokeless electric heating element, heat radiation over 600℃ , maximum working temperature 450℃ , hi-limiter protection
- Dual-deck and independent control system design
- With PID Microprocessor controller, baking temperature and time are always under perfect control
- The length of the baking chamber is 830mm, and the width of the conveyor chain is 530mm, suitable for cooking all kinds of food
- The large-capacity water basin ensures that the food is tender. It catches the oil to cool down the roaster, prevents fire and the water overflows by itself. One-button solenoid valve for water supply
- Dual cooling fans, low temperature on the surface of the roaster body, long life of electrical components. Indicator light to monitor heat pipe information in real time
- Untra-thick environmentally friendly thermal insulation cotton. The temperature deviation is 3℃ . The upper part of the inner chamber is uniquely designed with energy-collecting plate, which is highly efficient and energy-saving
- Counting function, wifi data transmission and query, it is convenient for data collection and control at various shops
- All stainless steel structure and hygiene design
- Free standing design，5 inch heavy duty casters with brake
- Reversible conveyor direction

设备名称 Name		单层链式烤鱼炉 Single Deck Conveyor Fish Roaster	双层链式烤鱼炉 Dual Deck Conveyor Fish Roaster
产品型号 Model		NTF20-1S	NTF20-1D
宽 Width (mm)		1580	1580
深 Depth (mm)		752	752
总高 Overall Height (mm)		853	1424
最高温度 Max. Operation Temp.		450℃	450℃
功率 Power	每层 (Per Deck)	15kW	15kW x2
时间调节 Bake Time Range		1~14 minutes	1~14 minutes
电压 Volts		380-415V 3N~	
频率 Hz		50/60Hz	
防水等级 IP Rating		IPX3	

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

歌兰德保温柜系列

NOPEINHOLO®series





翻转门（可选）
Multi-deck Flip Door (optional)



适用全型面包盘 660*460*25
或者 1/1GNP

Accomodated for both
660*460*25mm pan and 1/1GNP



直立保温柜

UPRIGHT HEATED FOOD HOLDING CABINET











功能特点 | Features

- 全不锈钢结构
- 可快速更换控制箱发热体
- 数字温控，方便读数 *
- 保湿功能，确保食物口感
- 温度可调，从 25℃ ~99℃
- 重型自动回归门铰，抬起即拆型门
- 耐温磁性门封条
- 适用于面包盘 660*460*25 及 GNP1/1*65MM
- 单向开门或者对通开门可选 *
- 脚轮及可调脚可选
- 柜内温差 ± 3 ℃内

- Stainless steel construction
- Interchangeable heating module to make maintenance easy and minimize downtime
- Digital thermometer for fast and clear reading*
- Humidity function helps food to maintain moisture
- Adjustable temperature setting from 25℃ ~99℃
- Self-closing and lift-off doors with tempered glass window
- Magnetic door gaskets
- Accomodated for both GNP 1/1X65MM and bun pan 660*460*25MM
- Front loading or pass through for options
- Casters or adjustable legs available for options
- The temperature difference inside the cabinet is within ± 3 ℃

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

产品规格表

Model Table

直立保温柜

NOPEINHOLD™ Series










产品型号 Model	UFC-F	UFC-P	HFC-F	HFC-P	EconHold-UF	EconHold-UP	EconHold-HF	EconHold-HP
名称 Name	电子式全型单向直立保温柜 Upright Food Holding Cabinet	电子式全型双向直立保温柜 Upright Food Holding Cabinet	电子式半型单向直立保温柜 Upright Food Holding Cabinet	电子式半型双向直立保温柜 Upright Food Holding Cabinet	机械式全型单向直立保温柜 Upright Food Holding Cabinet	机械式全型双向直立保温柜 Upright Food Holding Cabinet	机械式半型单向直立保温柜 Upright Food Holding Cabinet	机械式半型双向直立保温柜 Upright Food Holding Cabinet
特征 Description	单向开门 Front loading	双通门 Pass through	单向开门 Front loading	双通门 Pass through	单向开门 Front loading	双通门 Pass through	单向开门 Front loading	双通门 Pass through
温控类型 Thermostat	Electronic temperature control 电子温控				Mechanical temperature control 机械温控			
外形尺寸 Size (mm)	636X805X1854		636X805X990		636X805X1854		636X805X901	
电压 Voltage	220-240V ~, 120V ~				220-240V ~			
功率 Power	2.2kW		1.1kW		2.2kW		1.1kW	
频率 Frequency	50/60Hz		50/60Hz		50/60Hz		50/60Hz	
防水等级 IP Rating	IPX4		IPX4		IPX4		IPX4	
层数 Number Of Layers	15		5		15		5	
面包盘尺寸 Sheet Pan Size (mm)	660x460x25		660x460x25		660x460x25		660x460x25	
可放面包盘数量 No. of Sheet Pan	15		5		15		5	
份数盆尺寸 GNP Size (mm)	530X325X65 (1/1GNP)		530X325X65 (1/1GNP)		530X325X65 (1/1GNP)		530X325X65 (1/1GNP)	
可放份数盆数量 No.of GN pan	14		4		14		4	
认证类型 Certificate	ETL		ETL		-		-	
包装尺寸 Packing Size WxDxH (mm)	950x720x2010	950x720x2010	950x745x1200	950x745x1200	950x720x2010	950x720x2010	950x745x1200	950x745x1200
净重 Net Weight (kg)	165	168	91	95	138.5	150	82	86
毛重 Gross Weight (kg)	190.5	227	129	125.5	211	211	120	124

PS : 可选项目：翻转门。所有型号的门都可以更换为翻转门
Flip door is available for option

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

NTCS1F

单头双面煎扒炉

CLAMSHELL GRILL LITE



功能特点 | Features

◎简洁的设计，上下煎板同时烹饪两面，将烹饪时间减少多达 50%
◎上煎板铰链配有阻尼设计，可适应不同厚度的产品，并可自动定位为 45° / 85°
◎上煎板和下煎板可以独立控制温度，工作温度范围从 30° C 至 300° C
◎煎板有侧防溅保护装置，防止油脂溢出及过热安全保护，便于操作和安全保护
◎可拆卸油脂盒，便于清洁

◎ Compact and portable design. The upper and lower grill plates cooking both sides simultaneously, reducing cook time by up to 50%
◎ Upper plate hinge equipped with damping design to accommodate various of product thickness, and can be positioned at 45% / 85% automatically
◎ Upper plate and lower platen can be on/off controlled independently with operating temperature from 30℃ up to 300℃
◎ Side splash guard on lower platen panel to protect against grease spills / upper heat safety guard in place for easy operation and safety protection
◎ Removable grease box foreasy cleanup



双面煎扒炉专为烹饪牛肉饼，鸡肉三明治，帕尼尼以及卷饼等食物而设计。
Clamshell Grill Lite is designed to cook beef patties, chicken, sandwiches, panini and wraps etc.

产品型号 Model	NTCS1F
产品尺寸 Dimension WxDxH2/H1 (mm)	354×657×437
烹饪区域 Cooking area WxDxH (mm)	300×400
电压 \ 频率 Voltage & Frequency	220V~ 380V 3N~ 50/60Hz
功率 Power (kW)	5.25kW
扒板厚度 Grill Plate Thickness (mm)	上扒板 (Upper griddle) 20 + 下扒板 (Lower griddle) 18
包装尺寸 Packing Size WxDxH (mm)	526x820x625
净重 Net Weight (kg)	54
毛重 Gross Weight (kg)	57

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

24 寸 /36 寸台式扒炉

CE

COUNTERTOP HEAVY-DUTY GRIDDLE

功能特点 | Features

- 从室温加热至 260℃只需 19 分钟
- 厚度达到 24mm 的重型扒板
- 光亮、耐磨的镀铬表面
- 镀铬表面减少超过 20% 的清洁时间和清洁剂
- 插进扒板的温度探针确保控温精准 (烹饪区域 ±5℃)
- 3.8”英寸高的围边防止油脂飞溅
- 热效率极高的带状电热管
- 每 12 英寸独立控温
- 精准的温度控制器（探针精度 ±1℃)
- 台面带有凹陷的油脂收集口
- 易于清洗的集油槽
- 液晶显示器

- Heat up rapidly. Only take 19 minutes to reach temperature 260℃ from ambient 25℃
- Up to 24mm thickness steel griddle plate with chrome finished surface
- Chrome finished griddle plate makes cleaning very easy and save cleaner by 20%
- 3.8inch splash plate
- The temperature probe inserted into the grill plate ensures accurate temperature control (cooking area ±5℃)
- Flat-bar type heating element. Heat transfers more efficiently
- Independent temperature control every 12 inches
- Accurate temperature controller (probe accuracy ±1℃)
- Recessed grease collection port on the top
- Removable oil tray at bottom
- LCD display





* 扒\可选

Customized grill plate is available for option

产品型号 Model	NTL24	NTL36
产品尺寸 Dimension WxDxH2/H1 (mm)	614x747x443	919x747x443
烹饪区域 Cooking area WxDxH (mm)	610x610	915x610
电压 \ 频率 Voltage & Frequency	380-415V 3N~, 240V 3~, 50/60Hz	
功率 Power (kW)	8kW	12kW
扒板厚度 (mm) Grill Plate Thickness	24	24
包装尺寸 Packing Size WxDxH (mm)	860x730x590	1030x880x580
净重 Net Weight (kg)	108	156
毛重 Gross Weight (kg)	132	185

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

单双头电热煎饺机

COUNTERTOP ELECTRIC DUMPLING GRIDDLE

功能特点 | Features

- 镀硬铬扒板，保证高效热传递同时抗腐蚀更出色
- 上盖简洁设计，随停任意位置，清洁更方便
- 控制面板可编程设置，满足更多烹饪需求，可煎饺及扒类食材
- 高效低密度发热管，从室温 30˚C 到 210˚C 仅需 11 分钟
- 加水时间及注水量灵活设置



- Hard chrome plated grill plate to ensure efficient heat transfer and better corrosion resistance
- Simple design of the top cover, stopping at any position, more convenient to clean
- Editable settings on the control panel to meet more cooking needs, pan fried dumplings and steaks
- Flexible setting of water filling time and volume
- High-efficiency low-density heating tube, only 11 minutes from room temperature 30˚C to 210˚C



烹饪完毕蜂鸣及指示灯提醒

Buzzer and indicator light to remind after cooking

产品型号 Model	PYJ-01	PYJ-02
电压 / 频率 Voltage & Frequency	220-240V~, 50/60Hz	
功率 Power	3kW	6kW
烹饪最大量 Maximum Cooking Quantity	28~33 个	28~33 个 x2
尺寸 Dimension (mm)	285 x 596 x 341	570 x 596 x 341
烹饪区尺寸 Maximum Cooking Quantity (mm)	317 x 204	317 x 204 x2
包装尺寸 Maximum Cooking Quantity (mm)	410 x 695 x 510	665 x 695 x 510
净重 Net Weight (kg)	27	52
毛重 Gross Weight (kg)	29.5	55

产品型号 Model	PYJ-01/02 出厂默认参数 Default	PY-01/02 参数设置范围 Range
预热温度 Pre-heating Temperature	210℃	50~250℃
烹饪时间 Cooking Time	5:40	00:30~30:00 (MM:SS)
烹饪温度 Cooking Temperature	205℃	50~250℃
注水时间 Water Feeding Time	00:10 (MM:SS)	00:01~10:00 (MM:SS)
注水量 Feeding Water Volume	250ML	0~950ML

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

版权所有 ©2018–2024 广州极效能源科技有限公司
COPY RIGHT©2018–2024 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

乐飘逸系列·高温智能蒸柜
LEVENT Appliances series

灵活组合 | 任意搭配

FLEXIBLE COMBINATION
ARBTRARY COLLOCATION

二次加热 Secondary heating
独立大锅炉 Independent boiler
自动提醒锅炉除垢 Descaling reminder
自由组合 Free combination
二次热回收 Heat recycle
烹制/保温切换 Cook / heat hold switch

NTS–2S–L | NTS–4S–L

高温智能蒸柜

ELECTRIC HYPER STEAMER




灵活组合，任意搭配

Flexible combination

采用模块化设计可自由组合，这种结构最大的优点在于每台均为独立控制，如其中某台发生故障时不影响其它设备的使用。

Modular design, flexible for any sacale of kitchens

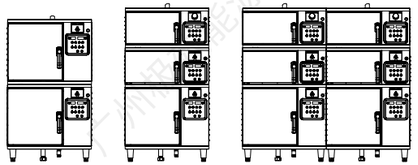

四层叠加四层
Four layers superimposed on four layers

四层叠加两层 *2
Four layers, two layers * 2

四层叠加两层 *2 加左右组合
Four layers superimposed,two layers * 2 plus left and right combination





功能特点 | Features

- 蒸汽二次加热功能，可选择 120℃ –130℃的高温蒸汽输出 : 比传统蒸柜的蒸制效率提升约 30%, 口感更佳
- 除垢功能，启动后添加指定清洁剂自动开始锅炉水垢清除作业无需手动清除
- 锅炉自动补水功能 , 可设置间歇补水时间 , 确保蒸汽强劲 , 补水 20 次后未到最高水位 , 一次性补齐到最高水位。
- 排水功能 , 每天首次开机时 , 自动排出锅炉脏水 , 保证品质 , 或手动按排水键自动排水 , 配置排水电动阀，排水更干净快捷
- 保温功能 , 从烹制状态下按保温键可以切换到保温模式 , 或烹制完成后自动进入保温模式
- 菜单功能 , 配置 4 个菜单 , 每个菜单可设置是否高温蒸汽 , 最长烹制时间 99 分 99 秒 , 内膛温度到预热温度 , 才可烹饪 , 确保烹饪品质
- 蒸汽二次热回收功能 , 将内膛排出的蒸汽热回收 , 加热的水再补进锅炉 , 确保蒸汽持续强劲 , 提升能效。
- 模块化设计组合 , 模块间独立控制 , 即使有故障也能做到营业不间断。故障显示代码，方便快捷排查维修。
- 预约烹饪功能

- During secondary reheating, steam temperature can be chosen from 120–130℃, 30% higher steam efficiency than a tranditional steamer
- After start–up, add the specified detergent to automatically start the boiler scale cleaning operation without manual cleaning
- Automatic water filling of boiler to ensure constantly strong & fresh steam. If water level didn't reach max. after 20 times replenishment, make up to the max. in one time
- Automatically or manually discharge the dirty water from the first power on every day, which ensure steam is clean and fresh. Electric drain valve helps water diacharge of boiler more quickly
- From cooking state press the heat preservation key can switch to heat preservation mode, or after cooking into heat preservation mode automatically
- Built in 4 menus, each of which can be set to high temperature steam or not. Max cooking time is 99'99". Only when chamber temperature reaches to preset, cooking can start
- Built–in heat exchange mainfold system for energy recycle, so steam is efficient and abundant
- Independent module control, even if there is a failure can be achieved uninterrupted business. Problem code is shown on the screen for maintenance
- Reservation cooking function



NTS–2S–L



NTS–4S–L

产品型号 Model	NTS–2S–L(左开门)	NTS–4S–L(左开门)
电压 / 频率 Voltage & Frequency	220–240V ~, 380–415V 3N~, 50/60Hz	
功率 Power	4.4kW	6.4kW
尺寸 Dimension (mm)	672 x 650 x 420	672 x 650 x 620
内膛尺寸 Chamber size (mm)	350 x 548 x 177	350 x 548 x 377
时间调节 Time Range (mm:ss)	00:01~99:59	
防水等级 IP Rating	IPX4	
包装尺寸 Packing Size WxDxH (mm)	740 x 730 x 480	740 x 730 x 680
净重 Net Weight (kg)	53	68.5
毛重 Gross Weight (kg)	62	77

设备出厂默认为左开门，可选右开门
The device defaults to the left opening door, and the right opening door is optional

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

电热双缸六头升降煮面炉

ELECTRIC AUTO-LIFT NOODLE COOKER (2-TANK,6-BASKET)







功能特点 | Features

- ◎ 全不锈钢机身设计，外观简洁
- ◎ 台面上自动升降机构防水设计，升降电机使用寿命大为提升
- ◎ 前置按钮式升降开关，使用寿命优于拍打式，每个按键有 2 个菜单
- ◎ 多档功率档位档位开关，根据烹饪选择所需功率
- ◎ 配置快进水阀和慢补水阀，有溢水功能
- ◎ 电脑版智能精准控温控时，具有保温功能，保温温度可调
- ◎ 具有超温保护功能和缺水提醒功能
- ◎ 独特的喷流式设计，高效节能
- ◎ 前脚后轮，方便搬运和设备安装调整

- ◎ Stainless steel body design, simple appearance
- ◎ Waterproof design of the automatic lifting structure on the table, greatly improving the service life of the lifting motor
- ◎ The service life of the lifting push button is longer than that of the flap type. Each button has two menus
- ◎ Multi-power gear switch, select the required power according to cooking
- ◎ Equipped with fast water inlet valve and slow water refill valve with overflow function
- ◎ Intelligent computer panel controls temperature and time precisely. It has the function of heat preservation and the heat preservation temperature is adjustable
- ◎ With over-temperature protection and water shortage reminder function
- ◎ Unique water jet design, high efficiency and energy saving
- ◎ The front feet and rear casters are convenient for moving around

产品型号 Model	NTG-6A
产品尺寸 Product Size WxDxH (mm)	600 x 800 x 1038
缸体尺寸 Cylinder Block Size (mm)	192 x 560 x 200
容量 Capacity (Liter)	19L x 2
电压 / 频率 Voltage & Frequency	380-415V 3N~, 50/60Hz
额定功率 Rated Power (kW)	12.3kW
预存菜单 Menu No.	12
防 水 等 级 IP Rating	IPX4
包装尺寸 Packing Size WxDxH (mm)	910 x 720 x 1200
净重 Net Weight (kg)	75
毛重 Gross Weight (kg)	83

简易蒸烤箱

ECONOMIC COMBI OVEN

(不带锅炉)(without boiler)



功能特点 | Features

- ◎ 简单易操作，只需三个旋钮，控制温度、时间和湿度
- ◎ 可根据温度、自动设定合适的湿度
- ◎ 具备多种烹饪功能：烘烤、蒸、烤、蒸烤模式、炖、复热
- ◎ 快速蒸汽，最佳烹饪能力，节能减耗
- ◎ 正反转涡流送风，温度更均匀
- ◎ 内膛采用 304 镜面板圆弧结构，易清洁
- ◎ 温度范围：30-300℃

- ◎ Simple and easy to operate, only need three knobs to control temperature, time and humidity
- ◎ It can automatically set the appropriate humidity according to the temperature
- ◎ Multiple cooking functions including baking, steaming, roasting, steaming & roasting, stewing and reheating
- ◎ Fast steam, best cooking ability, energy saving
- ◎ Positive and negative vortex air supply, more uniform temperature
- ◎ The inner chamber adopts 304ss mirror panel arc structure, which is easy to clean
- ◎ Temperature range: 30-300 ℃

产品型号 Model	NC0423S-A	NC0523S-A
名称 Name	电子简易款四层热风循环蒸烤箱 4-Layer Economic Combi Oven	电子简易款五层热风循环蒸烤箱 5-Layer Economic Combi Oven
电压 \ 频率 Voltage & Frequency	380V , 3N~ 50/60Hz	380V , 3N~ 50/60Hz
总功率 Rated Power (kW)	6.1kW	6.1kW
产 品 尺 寸 Product Size WxDxH (mm)	744 x 657 x 704	744 x 657 x 784
内膛规格 Chamber Size (mm)	370 x 460 x 380	370 x 460 x 460
容量 Capacity	4 x 2/3GNP	5 x 2/3GNP
控制器 Control	电子旋钮控制器 Electronic knob controller	电子旋钮控制器 Electronic knob controller
温度控制范围 Temperature range	30~300℃	30~300℃
防水等级 IP Rating	IPX4	IPX4
配置网架数 No. of Rack	2	2
包装尺寸 Packing Size WxDxH (mm)	770 x 770 x 830	770 x 700 x 950
净重 Net Weight (kg)	63	72
毛重 Gross Weight (kg)	84	93

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司