广州极效能源科技有限公司
Nopein Techniques (Guangzhou) Co., Ltd.

官方公众号　官方抖音号　官方视频号　官方网站

ISO 9001　ISO 45001　ISO 14001

烹饪资讯热线：13903075144
全国售后热线：400-833-7300

广东省广州市经济技术开发区永和来安一街 1 号
1 Laian 1 Street, Huangpu District
Guangzhou 511356, P.R.China

Tel　+86-20-32155160　|　Fax　+86-20-32171316
Mail　info@nopeinoven.com　|　Web　www.nopeinoven.com

版权所有 ©2018-2026 广州极效能源科技有限公司
Copy right©2018-2026 Nopein Techniques (Guangzhou) Co., Ltd.

本册图片数据仅供参考，最终解释权归广州极效能源科技有限公司所有。
The images are for reference only. Final explanation is reserved by Nopein Techniques (Guangzhou) Co., Ltd.

2026 · 极效产品
2026 · 第一版



广州极效能源科技有限公司
Nopein Techniques (Guangzhou) Co., Ltd.

CATALOGUE

2026 极效产品

版权所有 ©2018-2026 广州极效能源科技有限公司
Copy right©2018-2026 Nopein Techniques (Guangzhou) Co., Ltd.

专精特新企业

Enterprise Profile
企业简介



广州极效能源科技有限公司
Nopein Techniques（Guangzhou) Co., Ltd.

是一家集研发、生产和销售为一体的商用厨房设备制造企业。本企业专注于微波、快速加热、传导和节能环保等技术的研发和应用，并且将技术应用于餐饮行业。

我们的技术专家不仅拥有丰富的技术应用专长，更加拥有数十年的商用厨房营运服务从业经验。我们与国际快餐连锁企业、国内餐饮集团，亚太、北美及欧洲专业客户都有广泛的深度业务合作。我们不仅了解产品，更加了解餐饮行业、菜品烹饪过程和细节控制，本企业餐饮设备与您的业务完美融合。

公司经营秉持以工匠精神、不断创新的理念，为用户提供便利高效的产品和解决方案，为用户创造效益。

Nopein Techniques (Guangzhou) Co., Ltd. is a comprehensive commercial kitchen equipment manufacturer integrating R&D, manufacturing, and sales. Specializing in microwave, rapid heating, thermal conduction, and energy-efficient eco-friendly technologies, we deliver cutting-edge solutions customized for the foodservice industry.

Our engineering team possesses not only technical expertise in advanced heating systems but also decades of hands-on experience in commercial kitchen operations. We maintain strategic partnerships with global QSR chains, domestic hospitality groups, and specialized clients across Asia-Pacific, North America, and Europe. With deep insights into culinary workflows and operational nuances, our equipment achieves seamless integration with diverse foodservice models, ensuring precision in cooking control and energy optimiza.

Guided by artisan ethos and relentless innovation, we provide customers with convenient and efficient products and solutions that enhance profitability for customers worldwide.

广州极效能源科技有限公司

企业愿景 Corp. Vision

同步时代， 以数智化创新赋能中国商厨行业
Synchronization, to be a contemporary and renovating manufacturer

企业价值观 Corp. Values

为客户创造价值 Create Value for Customers
诚实正直 Integrity | 追求卓越 Passion for Excellence

相关证书 Certificates









这些商用厨房设备广泛应用于咖啡厅、新茶饮、便利店、烘焙、中西式餐厅、QSR、医院和酒店等商业厨房。

Those commercial kitchen equipment are widely used in coffee shops, bars, convenient stores, QSR, hospitals & hotels, and other commercial kitchens, etc.

-NopeinOven® series
-GRANDFRYER® series
-NopeinCombi® series
-GRANDOVEN® series
-GRANDGRILL® series
-Lapiioey® series

企业理念 Our Mission

工匠精神
Spirit of Artisan

不断创新
Continuous Innovations

为商厨用户提供便利 / 高效产品 / 解决方案
Built for high efficient cooking & commercial kitchen solutions.

目录 CATALOGUE



07-20

诺宾炉系列
NopeinOven series

07-16　微波热风快速烤箱 High Speed Oven
17-18　小型微波烤箱 Microwave Meo Oven
19-20　微波蒸柜 Microwave Steamer



21-40

诺宾万能蒸烤箱系列
NopeinCombi series

21-36　万能蒸烤箱 NopeinCombi
37-40　烧烤炉 Electric Roaster



41-64

歌兰德系列
Grand series

41-50　炸炉系列 GrandFryer
51-58　履带式电热披萨炉系列 GrandOven
59-60　链式烤鱼炉 Conveyor Fish Roaster
61-62　单双头双面煎扒炉 Clamshell Grill Lite
63-64　台式扒炉 Countertop Heavy-Duty Griddle



65-74

乐飘逸系列
Lapiioey series

65-68　高温智能蒸柜 Electric Hyper Steamer
69-71　直立保温柜系列 NopeinHold
72-72　单双头电热煎饺机 Countertop electric dumpling griddle
73-73　电热升降煮面炉 Electric Auto-lift Noodle Cooker
74-74　简易蒸烤箱 Economic Combi Oven

全新设计丨非凡体验

CRAFTED ANEW,
EXPERIENCED BEYOND

诺宾炉



为什么选择诺宾炉？

WHY NopeinOven® ?

NopeinOven® 诺宾炉系列产品旨在为客户提供极速、节能、易于操作的烹饪解决方案，让用户即使在配餐高峰仍然得心应手、从容应对。NopeinOven® 诺宾炉集合了微波技术、冲击热风，实现极速加热、加热均匀一致及食物表面爽脆色泽诱人的烘焙效果。多段烹饪程序，每段烹饪灵活选择热风、高低风速、微波输出功率，组合丰富多样，再复杂的菜品也能出色完成。

The NopeinOven® series products are designed to provide customers with extremely fast, energy-saving and user-friendly cooking solutions, so that staffs can handle orders with ease even during peak hours. With the combination of microwave, vertical hot air impingement, NopeinOven® speed oven makes food heated fast, evenly and crisp with attractive color. NopeinOven® Micro computer provides multi-stages cooking cycle for each recipe. Each cooking cycle includes a combination settings of microwave, vertical hot air impingement, providing a wide range of cooking application.

咖啡店
Coffee Shop

新茶饮
New Tea Drinks Stores

便利店
Convenience Stores

中西餐厅
Chinese & Western Restaurant

快餐店
QSR

连锁餐饮
Chain Restaurants



* 产品规格及设计如有变更，恕不另行通知；
产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

极速烹饪 | 完美出餐

CONVENIENT/ INTELLIGENT
EXTREME SPEED

新鲜美味的秘诀在于快速烹饪，保留原味。

无论是冷冻还是冷藏食材，经过诺宾炉高效微波快速加热，减少营养流失，保持食物原味和营养。热风循环加热均匀，食物表面鲜酥香脆，色泽诱人。

The secret to fresh, flavorful cuisine lies in rapid cooking that preserves natural essence.

Whether handling frozen or refrigerated ingredients, NopeinOven® leverage high-efficiency microwave rapid heating to minimize nutrient loss while retaining original taste and nutritional integrity.

Complemented by a precision convection heating system, the technology ensures uniform heat distribution, delivering crispy golden exteriors, tender interiors, and visually appealing results.







* 产品规格及设计如有变更，恕不另行通知；
产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

COOKING FUNCTIONS


烹饪方式

超强热风快速加热
HOT AIR IMPINGEMENT

微波和热风冲击混合加热
COMBINATION OF MICROWAVE & IMPINGEMENT

微波快速加热
MICROWAVE RAPID HEATING

微波解冻，回温食物
FROZEN FOOD THAWING

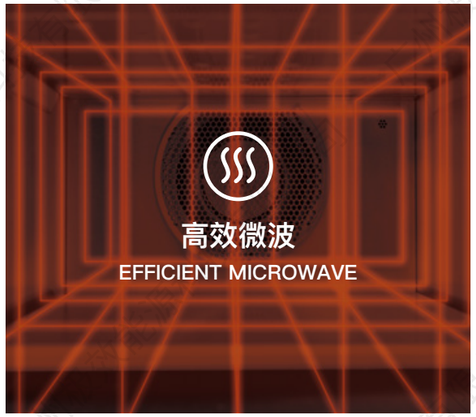





广州极效能源科技有限公司

NopeinOven®
EXTREME SPEED
COOKING SOLUTION
极速烹饪
解决方案

NopeinOven®

高效智能丨极速出餐

EFFICIENT INTELLIGENCE
EXTREME SPEED

全新设计 · 非凡体验

Crafted Anew · Experienced Beyond

7 IN 全新大平面玻璃 +7 寸触摸屏

A Brand-New Large Glass Surface +7-inch Touchscreen

新 SiTngs 采用 7 英寸 TFT 触摸屏，分辨率更高，反应速度更快

The new SiTngs features a 7-inch TFT touchscreen with higher resolution and faster response speed.





全新大容量

内膛空间升级

A Brand-New, High-Capacity Upgraded Interior Cavity.

新 SiTngs 内膛空间更大，可放置食物更多

The new SiTngs chamber offers a larger capacity, increasing food capacity.



IOT WIRELESS INTERCONNECTION

IOT 无线互联

NopeinOven®
FEATURES
产品特点

- 250+ 个标准菜单储存能力
- 菜单可设置分段烹调程序
- 配置变频电机，每段烹调程序自由选择 10 档垂直冲击风、11 档微波功率输出
- 多重安全保护，微波锁止安全门设计
- 内置油烟过滤网、催化酶除味 *
- 标准菜单模式、自选模式
- 菜单保密功能、权限管理
- 系统自诊断功能
- 防空载提醒功能、菜单烹调流程定义功能
- 支持 IOT 无线互联，可实现设备数据信息共享

- 250+ preset menu storage capacity
- Multi-stage programming for each recipe
- Equipped with a variable frequency motor
- Adjustable blower speed range from 10% to 100% in 10% increment
- 11 microwave power levels for each cooking stage
- Multiple safety protection, microwave lock safety door design
- Built-in oil smoke filter and catalytic converter*
- Standard menu mode, manual menu mode
- Menu confidential function, authority management
- System self-diagnosis function
- Anti-empty load reminder function, menu cooking process naming function
- IOT Wireless connectivity for data sharing of different device

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

品质源于细节

QUALITY LIES IN THE DETAILS











全新设计 · 非凡体验

Crafted Anew. Experienced Beyond.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

微波热风快速烤箱

HIGH SPEED OVEN

全 · 新 · 推 · 出

NEW



NT-SiTngs

小功率 ,16A 以下插头可用
适用性更广

Low power, plugs below 16A are available
Wider applicability



NT-ProBT

双微波 , 大功率
效率更高，出餐速度快

Dual microwave, high power
More efficient,
faster serving speed



NT-WK-T

双微波、大功率、内膛尺寸大 ,
可烹饪体积较大食物

Dual microwaves, high power,
large internal cavity,
can cook larger food

可 选 颜 色
Color available

Stainless 不锈钢原色 | Cool Black 冷黑色 | Cool Orange 冷橙色 | Jet Black 深黑色 | Red 红色 | Blue 蓝色

备注：各型号标准色详见规格表，如需其他定制配色，请联系销售经理定制。

Note: Standard colours for above models are listed in the specification table.
For other custom colour options, please contact your sales manager.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

NopeinOven®

微波热风快速烤箱





产品型号 Model	NT-SiTngs	NT-ProSiT
微电脑控制板型号 Micro Computer	7 英寸触摸屏 (7" Touch Screen CTL)	5 英寸触摸屏（5" Touch Screen CTL)
产 品 尺 寸 Product Size W×D×H (mm)	450 × 647 × 660（含顶部架子 With top rail) 450 × 647 × 612（不含顶部架子 Without top rail)	460 × 675 × 660
内 膛 尺 寸 Chamber Size W×D×H (mm)	317 × 315 × 188 (12.5"×12.4"×7.4")	305 × 305 × 185 (12"×12"×7.3")
包装尺寸 Packing Size W×D×H (mm)	770 × 565 × 750	770 × 565 × 840
容 积 Capacity (Liter)	18L	17 L
电压 / 频率 Voltage & Frequency	208-240V~,50/60Hz	208-240V~, 50/60Hz
额定功率 Rated Power	3.5kW	3.5kW
净重 Net Weight (kg)	61	66
毛重 Gross Weight (kg)	74	88.5
烹饪段数 Cooking Stage	10	15
微波功率 Microwave Power	1.5kW	1.5kW
热风功率 Hotair Power	3kW	3kW
风速段数 Blower Speed	10 档（Grade)	10 档（Grade)
可存储菜单数 Stock Menu	250+	100+
最高烹饪温度 Max Cooking Temp	280℃	280℃
微波输出范围 Microwave Output Range	0-100%, in 10% increment	0-100%, in 10% increment
烹饪模式 Cooking Mode — 热风冲击 Vertical hot air impingement	●	●
烹饪模式 Cooking Mode — 微波 Microwave	●	●
烹饪模式 Cooking Mode — 底部循环热风 Bottom convection	●	●
催化酶 Catalytic Converters	●	●
USB Port	●	●
防 水 等 级 IP Rating	IPX3	IPX3
认证类型 Certificate	CE CB	CE UKCA ETL ETL IEC FC
标准颜色 Standard Colors	冷黑色、不锈钢原色 Cool Black/SSL	深黑色、不锈钢原色 Jet Black/SSL

● 有 Yes — 无 Nil

配件列表 | Accessories List

ALUMINUM GRILL PLATE
铝 扒 板



适合于 / GOOD FOR
NT-ProBT/NT-ProBT-D
NT-SiTngs NT-ProSiT

用于 / USED FOR
三明治 / SANDWICH
牛排 / STEAK
鸡中翅 / CHICKEN WING

ROUND PIZZA PAN
圆形批萨盘



仅适用 / GOOD FOR
NT-SiTngs
NT-ProSiT

用于 / USED FOR
披萨 / PIZZA

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

产品规格表

MODEL TABLE








产品型号 Model	NT-ProBT/NT-ProBT-D	NT-WK-T
微电脑控制板型号 Micro Computer	5 英寸触摸屏（5" Touch Screen CTL)	7 英寸触摸屏 (7" Touch Screen CTL)
产 品 尺 寸 Product Size W×D×H (mm)	460 × 677 × 660	515 × 762 × 652
内 膛 尺 寸 Chamber Size W×D×H (mm)	317 × 294 × 193 (12.5"×11.6"×7.6")	375 × 330 × 227 (14.76"×12.99"×8.94")
包装尺寸 Packing Size W×D×H (mm)	770 × 565 × 840	881 × 630 × 767
容 积 Capacity (Liter)	17 L	28 L
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V ~, 50/60Hz	380-415V 3N~,50/60Hz
额定功率 Rated Power	6.3kW	6.9kW
净重 Net Weight (kg)	81	85
毛重 Gross Weight (kg)	96	100
烹饪段数 Cooking Stage	15	15
微波功率 Microwave Power	1.5kW×2	1.5kW×2
热风功率 Hotair Power	3.0kW+2.5kW	3.6kW
风速段数 Blower Speed	10 档 (Grade)	10 档 (Grade)
可存储菜单数 Stock Menu	100+	250+
最高烹饪温度 Max Cooking Temp	280℃	280℃
微波输出范围 Microwave Output Range	0-100%, in 10% increment	0-100%, in 10% increment
烹饪模式 Cooking Mode — 热风冲击 Vertical hot air impingement	●	●
烹饪模式 Cooking Mode — 微波 Microwave	●	●
烹饪模式 Cooking Mode — 底部循环热风 Bottom convection	●	●
催化酶 Catalytic Converters	●	●
USB Port	●	●
防 水 等 级 IP Rating	IPX3	IPX3
认证类型 Certificate	CE	-
标准颜色 Standard Colors	深黑色、不锈钢原色 Jet Black/SSL	不锈钢原色 SSL

● 有 Yes — 无 Nil


TEFLON MESH BASKET
特氟龙网格篮



仅适用 / GOOD FOR
NT-ProBT/NT-ProBT-D
NT-SiTngs
NT-WK-T

用于 / USED FOR
牛角包 / CROISSANT
鸡中翅 / CHICKEN WING
贝 果 / BAGELS

ROUND TEFLON MESH PAD
圆形特氟龙网格垫



仅适用 / GOOD FOR
NT-ProBT/NT-ProBT-D
NT-SiTngs

用于 / USED FOR
披萨 / PIZZA
烹饪面包类，可搭配披萨盘使用
Cooking bread, can be used with pizza pan

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



紧凑型设计
美味更轻松

COMPACT DESIGN
EASY & TASTY

NopeinOven®
FEATURES ／ 产品特点

- 紧凑型设计，节省空间，外观简洁，操作便捷
- 加热管与微波结合，实现快速烹饪。上下加热管烘烤着色，微波整体加热，大幅缩短烹调时间，提高效率
- 配备 6.8 英寸触摸屏，界面简洁直观，操作方便
- 可存储 100+ 个菜单，每个菜单支持 5 段烹饪程序，可独立调节加热管及微波。支持 U 盘上传下载，便于统一管理
- 设备可进入节能模式，空闲时低温运行，节省能源，退出后可快速回温至烹饪状态

- Compact design with space-saving footprint, sleek appearance, and user-friendly operation.
- Dual heating elements and microwave technology enable rapid cooking: Upper/lower heating elements ensure even browning, while microwave accelerates core heating, greatly reduce cooking time and enhance efficiency.
- Features a 6.8-inch touchscreen with intuitive interface for precise control.
- Stores 100+ programmable recipes, each customizable with 5-stage cooking programs with independent control of heating elements and microwave power. USB port enables recipe upload/download for centralized management.
- Energy-saving mode maintains low-power standby during idle, reducing consumption and with instant recovery to cooking temperature.

» MICROWAVE
MEO OVEN

小型微波烤箱



NT-MWO-T



NT-MWO-D

产品型号 Model		NT-MWO-T
产品尺寸 Product Size W×D×H (mm)	宽 W	490
	深 D	538
	高 H	361
内膛尺寸 Chamber Size (mm)	宽 W	270 (10.6")
	深 D	190 (7.5")
	高 H	168 (6.6")
包装尺寸 (mm) Packing Size WxDxH		613 x 601 x 433
电压 / 频率 Voltage & Frequency		208-240V 1N~,50/60Hz
额定电流 Rated current		15A
微波功率 Microwave Power		1.5kW
可存储菜单数 Stock Menu		100+
最高烹饪温度 Max.Temp.		250℃
额定功率 Power		3.3kW
加热管输出功率 Heating Element Power	上加热管 Top	1kW
	下加热管 Bottom	0.7kW
净重 Net Weight (kg)		40
毛重 Gross Weight(kg)		45
认证类型 Certificate		CB

产品型号 Model		NT-MWO-D
产品尺寸 Product Size W×D×H (mm)	宽 W	490
	深 D	544
	高 H	361
内膛尺寸 Chamber Size (mm)	宽 W	270 (10.6")
	深 D	190 (7.5")
	高 H	168 (6.6")
包装尺寸 (mm) Packing Size WxDxH		613 x 601 x 433
电压 / 频率 Voltage & Frequency		208-240V 1N~,50/60Hz
额定电流 Rated current		15A
微波功率 Microwave Power		1.5kW
可存储菜单数 Stock Menu		10
最高烹饪温度 Max.Temp.		250℃
额定功率 Power		3.3kW
加热管输出功率 Heating Element Power	上加热管 Top	1kW
	下加热管 Bottom	0.7kW
净重 Net Weight (kg)		40
毛重 Gross Weight(kg)		45
认证类型 Certificate		CB

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



MICROWAVE STEAMER
微波蒸柜


快餐店
QSR



便利店
Convenience stores


连锁餐饮
Chain restaurants



全日制餐厅
24h stores

NopeinOven® FEATURES / 产品特点

- 三种工作模式，纯微波、纯蒸汽、微波蒸汽混合模式
- 实现食物快速解冻，快速回温等各种场景需求
- 操作面板直观易懂，方便易用
- 24 个标准菜单储存，每个菜单 3 段烹饪
- 微波和蒸汽输出量可以 0–100%（0，10%，20%，30%.....90%，100%），11 档调节
- 保压锅炉，蒸汽温度最高可到 125°C，且烹饪过程中蒸汽不间断
- 双磁控管，微波功率大，带搅拌器，微波更加均匀
- 自带进水泵，对外部水源水压无要求
- 多重安全保护，微波安全门设计

- Three working modes, pure microwave, pure steam, microwave and steam mixed mode. Realize the needs of various scenes such as fast thawing of food and fast temperature recovery
- Simple operation panel, easy to use
- Can store 24 standard menus, 3 cooking stages for each menu
- Microwave and steam output can be adjusted from 0–100% (0, 10%, 20%, 30%...90%, 100%), 11 levels
- In the pressure-keeping boiler, the steam temperature can reach up to 125°C, and the steam is uninterrupted during the cooking process
- Double magnetron, high microwave power, with stirrer to ensure uniform microwave
- Built-in water inlet pump, no requirement for water pressure of the external water supply
- Multiple safety protection, microwave safety door design



可选颜色 Color available

Black 黑色　Red 红色　Stainless 不锈钢原色







产品型号 Model	NT-WZ
微电脑控制板型号 Control Panel Model	NT-WZ 按键型 NT-WZ Digital
产品尺寸 Product Size W×D×H (mm)	515×770×697
内膛尺寸 Chamber Size W×D×H (mm)	365×334×170 (14.4"×13.6"×6.7")
包装尺寸 (mm) Packing Size WxDxH	860×610×880
容积 Capacity (Liter)	20 L
电压 / 频率 Voltage & Frequency	380V~/50Hz
额定功率 Rated Power	5.4kW
烹饪段数 Cooking Stage	3
可存储菜单数 Stock Menu	24
烹饪模式 Cooking Mode	微波，蒸汽，微波 + 蒸汽 Microwave, Steam, Microwave + Steam
微波功率 Microwave Power	1.5kW×2
蒸汽功率 Steam Power	2.2kW
微波输出范围 Microwave Output Range	0-100%
蒸汽输出范围 Steam Output Range	0-100%
锅炉温度可设范围 Boiler Temperature Range	95-125°C
净重 Net Weight (kg)	85.5
毛重 Gross Weight(kg)	110

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



NopeinCombi®

诺宾万能蒸烤箱系列

NEW DESIGN
REDEFINING CULINARY FRONTIERS
NEXT-GEN EXPERIENCE

全新设计
重塑烹饪格局·新体验

全新第五代 NopeinCombi® 万能蒸烤箱
强悍烹饪能力·智能控制系统

Brand-new 5th Generation NopeinCombi® Combi Oven
Powerful Cooking Performance · Intelligent Control System

广州极效能源科技有限公司

NEW-GEN
CONTROL PANEL
10-INCH TFT
TOUCHSCREEN

新一代
控制板

10IN
TFT 触摸屏

分辨率更高，画面更清晰，
反应速度快 2 倍

Higher resolution, clearer visuals, and
2 times faster response



全新 UI 设计界面
操作直观顺滑
绝佳烹饪操作体验

BRAND-NEW UI DESIGN WITH
INTUITIVE AND SMOOTH OPERATION
FOR AN EXCEPTIONAL COOKING
EXPERIENCE

版权所有 ©2018–2026 广州极效能源科技有限公司
COPY RIGHT©2018–2026 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

大脑容，大智慧

Enormous power, the result of outstanding engineering

精准高低温控制

精准控温，满足不同食材需求。

Precise high and low temperature control

Precise temperature control to meet the needs of various ingredients.

10 英寸 TFT 触摸屏

微电脑电容屏，多点触摸控制方式。

10-inch TFT touchscreen

Microcomputer capacitive screen, multi-touch control.

大容量存储菜单

可储存 1024+ 个菜单，最高可达 15 段烹饪。

Mass Storage Menu

Capable of storing 1,024+ menus with up to 15 cooking stages.

全自动清洁

高效清洁片溶解油污，一键启动。

Fully automatic cleaning

High-effciency cleaning tablets dissolve oil stains，one-touch activation.

版权所有 ©2018-2026 广州极效能源科技有限公司
COPY RIGHT©2018-2026 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.





自诊断功能，强大数据管理后台

IOT WIRELESS INTERCONNECTION

IOT 无线互联



Powerful data background management with Self Diagnosis Function

NopeinCombi® 万能蒸烤箱特有的设备自诊断功能，便于及时发现故障，迅速维修。

The unique self-diagnosis function of NopeinCombi® facilitates timely detection of faults and rapid maintenance.

版权所有 ©2018-2026 广州极效能源科技有限公司
COPY RIGHT©2018-2026 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.



进口风机系统

Imported Fan System

升温快速、控温精准、
温度分布更均匀

Rapid Heating, Precise Temperature Control, and Even Heat Distribution



全新内膛升级

Brand-new chamber upgrade

内膛更紧凑，热效率提升

More compact chamber with improved thermal efficiency



全新智能清洗控制系统

Brand-New Intelligent Cleaning Control System

升级清洗除垢一体化，
安全卫生无死角

Enhanced All-in-One Cleaning & Descaling — Safe, Hygienic, and Thorough.

动态空气涡流

Dynamic Air Vortex

升级蒸汽发生系统

Upgraded Steam Generation System

澎湃细密蒸汽，速蒸锁鲜

Dense, Powerful Steam for Fast Cooking and Freshness Preservation.

功能全新升级

ALL-NEW UPGRADED FEATURES



集成抽拉式手持水枪

Integrated pull-out handheld sprayer

集成抽拉式手持水枪，使用方便，不占空间

Integrated pull-out handheld sprayer, convenient to use and space-saving.

* 只适用部分型号　*Apply to specific models



高精度六点温度探针

High-Precision Six-Point Temperature Probe

高精度六点温度探针，测温更精准

High-Precision Six-Point Temperature Probe for More Accurate Temperature Measurement.



烹饪状态灯

Cooking status indicator light

LED 交互状态功能灯，直观显示烹饪进程

LED interactive status indicator for clear and intuitive cooking progress display.

* 只适用部分型号　*Apply to specific models



人性化双边 LED 照明灯条

User-friendly dual-side LED lighting strips


双边 LED 照明灯条，照明范围广，节省能耗

Dual-side LED light strips provide wide illumination coverage while saving energy.


广州极效能源科技有限公司

品质源于细节
QUALITY LIES IN THE DETAILS



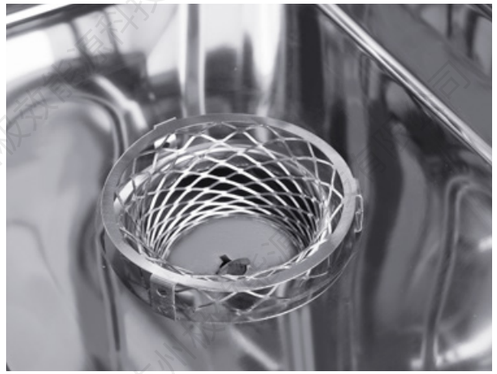



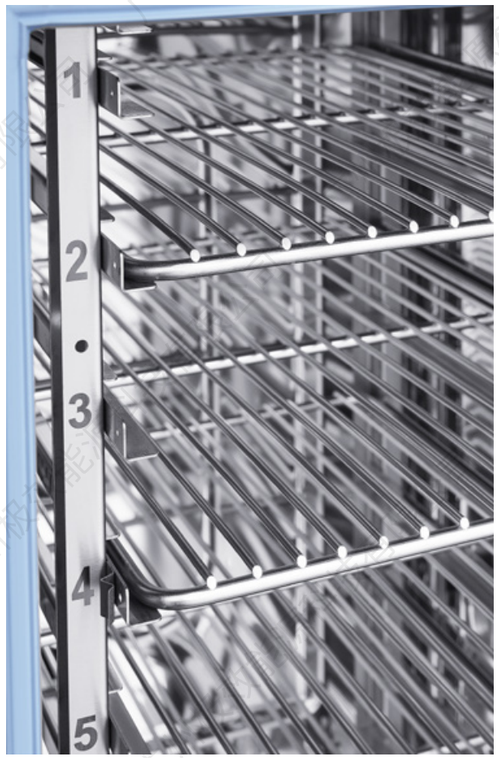

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

触摸屏系列
Touch screen series

可快速满足新零售智能厨房业态延展性功能需求，支持大数据管理功能。

It can quickly meet the extended functional needs of the new retail smart kitchen business and support big data management functions.

NopeinCombi®
万能蒸烤箱

IT FITS ANY KITCHENS

它 | 适合任何厨房

从 NC0423NGS+ 到 NC2021NGS+

任何规模的厨房，无论是开放式厨房或者是中央食品加工厂，均可找到适合的配置。

From NC0423NGS+ to NC2021NGS+

Any size kitchen, whether it is an open kitchen or a central food processing plant, can find a suitable configuration.



版权所有 ©2018–2026 广州极效能源科技有限公司
COPY RIGHT©2018–2026 NOPEIN TECHNIQUES (GUANGZHOU) CO., LTD.

NopeinCombi®
万能蒸烤箱

烹饪是膳食的艺术
合适的温度恰到好处

Cooking is the art of meals, with the right temperature

版权所有 ©2018–2026
广州极效能源科技有限公司
COPY RIGHT©2018–2026 NOPEIN
TECHNIQUES (GUANGZHOU) CO., LTD.



烹饪百变·样样精通

Variety of cooking, all proficient

25~300℃ 宽域烹饪温度调节、Delta T 温差控制和多段烹饪控制完美实现**中式爆炒**、**焖**、**蒸**、**炖**、**烧烤**等不同烹饪方式。

Wide range cooking temperature regulation at 25 - 300℃, Delta T temperature difference control and multi-stage cooking control perfectly realize different cooking methods such as fried, steamed, stewed, barbecued, etc.







NopeinCombi®

全新第五代万能蒸烤箱

产品规格表

MODEL TABLE















产品型号 Model	NC0423NGS+	NC0611NGS+	NC1011NGS+	NC2011NGS+	NC2021NGS+	NC0611NGSi	NC1011NGSi
名称 Name	4 层万能蒸烤箱 4-tray combi oven	6 层万能蒸烤箱 6-tray combi oven	10 层万能蒸烤箱 10-tray combi oven	20 层万能蒸烤箱 20-tray combi oven	40 层万能蒸烤箱 40-tray combi oven	6 层万能蒸烤箱 6-tray combi oven	10 层万能蒸烤箱 10-tray combi oven
控制器 Control	10 寸触摸屏 (10" Touch Screen CTL)	10 寸触摸屏 (10" Touch Screen CTL)	10 寸触摸屏 (10" Touch Screen CTL)	10 寸触摸屏 (10" Touch Screen CTL)	10 寸触摸屏 (10" Touch Screen CTL)	10 寸触摸屏 (10" Touch Screen CTL)	10 寸触摸屏 (10" Touch Screen CTL)
产品尺寸 (mm) Product Size W×D×H	699 × 625 × 715 (含把手 Including handle)	853 × 843 × 821 (含把手 Including handle)	853 × 843 × 1063 (含把手 Including handle)	860 × 855 × 1821 (含把手 Including handle)	1149×1064×1918 (含把手 Including handle)	853 × 843 × 821 (含把手 Including handle)	853 × 843 × 1063 (含把手 Including handle)
内膛尺寸 (mm) Chamber Size W×D×H	370 × 430 × 380	440 × 637 × 525	440 × 637 × 767	440 × 637 × 1500	736 × 856 × 1510	440 × 637 × 525	440 × 637 × 767
包装尺寸 (mm) Packing Size W×D×H	810 × 750 × 875	1014 × 974 × 1087	1014 × 974 × 1292	1010 × 980 × 2015	1250 × 1140 × 2050	1014 × 974 × 1087	1014 × 974 × 1292
电压 / 频率 Voltage & Frequency	380-415V 3N~, 50/60Hz	380-415V 3N~, 50/60Hz	380-415V 3N~, 50/60Hz	380-415V 3N~, 50/60Hz	380-415V 3N~, 50/60Hz	380-415V 3N~, 50/60Hz	380-415V 3N~, 50/60Hz
总功率 Rated Power	6.1kW	11.1kW	18.3kW	36.6kW	64.6kW	11.1kW	18.3kW
净重 Net Weight (kg)	75	144	181	323	428	129	161
毛重 Gross Weight (kg)	113	168.5	208	368	448	153.5	188
锅炉 Boiler — 带锅炉 With Boiler	●	●	●	●	●	-	-
锅炉 Boiler — 功率 Boiler Power	5.4kW	9kW	18kW	27kW	45kW	-	-
烘烤功率 Roast Power	5.8kW	10.8kW	18kW	36kW	64kW	10.8kW	18kW
容量 Capacity	4 × 2/3GNP	6×1/1GNP	10×1/1GNP	20×1/1GNP	40×1/1GNP	6×1/1GNP	10×1/1GNP
配置网架数 No. of Rack	选配 /Optional	选配 /Optional	选配 /Optional	选配 /Optional	选配 /Optional	选配 /Optional	选配 /Optional
认证类型 Certificate							

● 有 Yes — 无 Nil

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

全新设计 · 重塑烹饪格局 · 新体验
NEW DESIGN REDEFINING CULINARY EXPERIENCE

ACCESSORIES LIST 配件 · 列表

不锈钢盘
SSL Pan



1/1×25mm

尺寸 Size: 530×325×25mm
编码 Code : 907010071

不锈钢盘
SSL Pan



1/1×40mm

尺寸 Size: 530×325×40mm
编码 Code : 907010072

不锈钢盘
SSL Pan



1/1×65mm

尺寸 Size: 530×325×65mm
编码 Code : 907010047

烤网 （外网）
Roasting Rack



1 / 1

尺寸 Size: 530×325mm
编码 Code : 907010091

冲孔不锈钢盘
SSL Perforated Pan



1/1×25mm

尺寸 Size: 530×325×25mm
编码 Code : 907010073

冲孔不锈钢盘
SSL Perforated Pan



1/1×40mm

尺寸 Size: 530×325×40mm
编码 Code : 907010074

冲孔不锈钢盘
SSL Perforated Pan



1/1×65mm

尺寸 Size: 530×325×65mm
编码 Code : 907010075

烤网 （内网）
Cooling Rack



1 / 1

尺寸 Size: 470×270mm
编码 Code : 907010092

铝合金不沾冲孔平烤盘
Nonstick Perforated Sheet

1/1×10mm

尺寸 Size: 530×325×10mm
编码 Code : 907010083

不沾冲孔烤盘
Nonstick Perforated Sheet

1/1×25mm

尺寸 Size: 530×325×25mm
编码 Code : 907010079

不沾冲孔烤盘
Nonstick Perforated Sheet

1/1×40mm

尺寸 Size: 530×325×40mm
编码 Code : 907010080

不沾冲孔烤盘
Nonstick Perforated Sheet

1/1×65mm

尺寸 Size: 530×325×65mm
编码 Code : 907010081

铝合金不沾平烤盘
Nonstick Sheet



1/1×10mm

尺寸 Size: 530×325×10mm
编码 Code : 907010082

铝合金不沾烤盘
Nonstick Sheet



1/1×25mm

尺寸 Size: 530×325×25mm
编码 Code : 907010076

铝合金不沾烤盘
Nonstick Sheet



1/1×40mm

尺寸 Size: 530×325×40mm
编码 Code : 907010077

铝合金不沾烤盘
Nonstick Sheet



1/1×65mm

尺寸 Size: 530×325×65mm
编码 Code : 907010078

八孔不沾鸡蛋煎烤盘
Nonstick Egg Pan



1/1

尺寸 Size: 530×325mm
编码 Code : 907010084

双面牛排煎烤板
Reversible Steak Pan



1/1

尺寸 Size: 530×325mm
编码 Code : 907010085

超级薯条炸篮
Fries basket



1/1

尺寸 Size: 530×325mm
编码 Code : 907010086

烤鸭挂架
Duck Roast Rack



编码 Code : 915010075

六头烤鸡架
Chicken Roast Rack (6)



1/1

尺寸 Size: 530×325mm
编码 Code : 907010087


八头烤鸡架
Chicken Roast Rack (8)



1/1

尺寸 Size: 530×325mm
编码 Code : 907010088

十头烤鸡架
Chicken Roast Rack (10)



1/1

尺寸 Size: 530×325mm
编码 Code : 907010089

土豆烤架
Potato Roast Rack



1 / 1

尺寸 Size: 530×325mm
编码 Code : 907010090

不锈钢盘
SSL Pan



2/3×25mm

尺寸 Size: 325×354×25mm
编码 Code : 907010096

不锈钢盘
SSL Pan



2/3×40mm

尺寸 Size: 325×354×40mm
编码 Code : 907010097

不锈钢盘
SSL Pan



2/3×65mm

尺寸 Size: 325×354×65mm
编码 Code : 907010062

不锈钢烤网（外网）
SSL Roasting Rack



2 / 3

尺寸 Size: 350×325mm
编码 Code : 907010106

不锈钢盘
SSL Pan



2/3×25mm

尺寸 Size: 325×354×25mm
编码 Code : 907010093

不锈钢盘
SSL Pan



2/3×40mm

尺寸 Size: 325×354×40mm
编码 Code : 907010094

不锈钢盘
SSL Pan



2/3×65mm

尺寸 Size: 325×354×65mm
编码 Code : 907010095

蒸烤箱底座
Stand



尺寸 Size: 840×680×648mm
640×515×638mm
编码 Code : 10401010001

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3×10mm

尺寸 Size: 325×354×10mm
编码 Code : 907010105

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3×25mm

尺寸 Size: 325×354×25mm
编码 Code : 907010101

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3×40mm

尺寸 Size: 325×354×40mm
编码 Code : 907010102

铝合金冲孔不沾平烤盘
Nonstick Perforated Sheet



2/3×65mm

尺寸 Size: 325×354×65mm
编码 Code : 907010103

铝合金不沾平烤盘
Nonstick Pan



2/3×10mm

尺寸 Size: 325×354×10mm
编码 Code : 907010104

铝合金不沾烤盘
Nonstick Pan



2/3×25mm

尺寸 Size: 325×354×25mm
编码 Code : 907010098

铝合金不沾烤盘
Nonstick Pan



2/3×40mm

尺寸 Size: 325×354×40mm
编码 Code : 907010099

铝合金不沾烤盘
Nonstick Pan



2/3×65mm

尺寸 Size: 325×354×65mm
编码 Code : 907010100

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



ELECTRIC CONVECTION ROASTER

热风循环烧烤炉

自动清洗功能
AUTOMATIC CLEANING

一键自动清洗，两种内腔清洗模式

One-key automatic cleaning, two cleaning modes for chamber

NopeinCombi® FEATURES ／ 产品特点

- 系统操作权限分级管理，日常操作、管理者权限及后台大数据分析诊断三级权限
- 烹饪计数及设备锁止功能，可满足终端用户个性化需求和租赁业务应用
- 温度范围广，30°C–300°C之间，可以烤制烤鸭，烧腊，烤乳鸽等
- 从室温（25°C）到预设温度（177°C）约 7 分钟
- 操作控制器可编程功能
- 每道烹饪（程序）最多可设置 9 个步骤，每个步骤可独立控制时间、温度、风机速度、排湿，可以满足较复杂烤制要求
- 最多可储存 16 道快捷菜单
- 多段风速，正反转高温电机，内膛温度更加均匀
- 强制降温功能，大大降低等待的时间
- 一键自动清洗，两种内膛清洗模式
- 具有保温功能，烘烤、保温二合一
- 二级开门门锁，开门即停止工作，更安全
- 三层玻璃门，保温和隔热效果更佳，防止高温烫伤
- 内膛拐角圆弧过渡，易于清洁，没有卫生死角
- 高效率的鼓风机，噪音极小，涡流送风，温度均匀
- 高效能保温材料，全方位隔热，节能省电
- 额外标配清洗水枪

- Hierarchical management of system operation authority, three levels of authority for daily operation, manager authority and background big data analysis and diagnosis
- Cooking counting and equipment locking functions can meet the individual needs of end users and rental business
- Wide temperature range, between 30° C –300° C, can roast duck, roast pork, roast pigeon, etc
- It takes about 7 minutes from room temperature (25° C) to preset temperature (177° C)
- Programmable controller
- Each cooking (program) can set up to 9 stages, and each stage can independently control the time, temperature, fan speed, and moisture removal, which can meet the more complex roasting requirements
- Up to 16 menus can be stored
- Multi-stage wind speed, forward and reverse high temperature motor, the temperature of the inner chamber is more uniform
- Forced cooling function, greatly reducing waiting time
- One-key automatic cleaning, two cleaning modes for chamber
- With holding function, roasting and holding are two in one
- The two-step door lock, which ensures oven stop working when the door is opened, is safer
- Three-layer glass door, better heat preservation and heat insulation, prevent high temperature scald
- The corners of the inner chamber have arc structure, which are easy to clean
- High-efficiency blower, low noise, vortex air supply, uniform temperature
- High-efficiency thermal insulation material, comprehensive thermal insulation, energy and electricity saving
- Standard cleaning water gun



每道烹饪（程序）最多可设置 9 个步骤，每个步骤可独立控制时间、温度、风机速度、排湿，可以满足较复杂烤制要求。

Each cooking (program) can set up to 9 stages and each step can independently control time, temperature, fan speed, and moisture removal, which can meet more complex roasting requirements.



NCR-16

产品型号 Model	NCR-12	NCR-16
名称 Name	热风循环烧烤炉 Electric Convection Roaster	热风循环烧烤炉 Electric Convection Roaster
控制器 Control	电子控制器 Digital CTL	电子控制器 Digital CTL
产品尺寸 (mm) Product Size WxDxH	960 × 851 × 1152	1222 × 1036 × 1154
内膛规格 Chamber Size (mm)	440 × 670 × 735	740 × 830 × 780
包装尺寸 (mm) Packing Size WxDxH	1020 × 970 × 1300	1250 × 1160 × 1280
电压 / 频率 Voltage & Frequency	380-415V 3N~, 50/60Hz	380-415V 3N~, 50/60Hz
温度范围 (℃) Temp.Range	30~300℃	30~300℃
烘烤功率 Power	18kW	18kW
容量 Capacity	9 只烤鸭 (9 Ducks)	16 只烤鸭 (16 Ducks)
总功率 Rated Power	18.3kW	18.3kW
净重 Net Weight (kg)	162	221
毛重 Gross Weight (kg)	202	326.5
认证类型 Certificate		

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



ELECTRIC MICROWAVE ROASTER
微波智能烧烤炉

微波和热风冲击混合加热
COMBINATION OF MICROWAVE & IMPINGEMENT

NopeinCombi® FEATURES ／ 产品特点

- 本炉采用全不锈钢结构，外型美观大方
- 内胆采用圆弧过渡连接，不藏垃圾，易于清洁
- 采用涡流风扇送风加热，有高低两种速度可供选择，且风机定时正反转，加热更均匀，保证烹制的食品色、香、味俱全
- 配有加湿功能，能根据食品的要求进行设置
- 电脑板采用电子式电脑板，操作直观，控制精准
- 具有储存功能，可以记忆 30 个菜单，操作者可将常用菜单预先编制好，储存在电脑板中
- 具备自动清洗功能，清洗程序已预先写好，也可根据内膛的清洁度自行编制清洗程序，清洗时只须长按清洗键 3 秒即可启动

- This roaster's exterior is made entirely of stainless steel to ensure long-lasting durability
- The inner chamber adopts arc transition connection, no garbage, easy to clean
- Eddy current fan is to supply air for heating.Two speeds can be chosen. The positive run and back run fan makes heating more even to ensure that the cooked food color, fragrance, taste are complete
- The humidification function can be set according to the requirements of food. Equipped with electronic computer board, the control is accurate
- It can memorize 30 menus
- The automatic cleaning function. The cleaning procedure has been written in advance, and can also prepare the cleaning procedure according to the cleanliness of the chamber. The cleaning can be started by pressing the cleaning key for 3 seconds



每道烹饪（程序）最多可设 置 6 个步骤，每个步骤可独 立控制时间、温度、风机速 度、微波，可以满足较复杂 烤制要求。

Each cooking (program) can be set up to 6 stages and each stage can independently control time, temperature, fan speed, microwave. It can meet more complex roasting.



额外标配清洗水枪
Standard cleaning water gun



NT-ProR

产品型号 Model	NT-ProR
名称 Name	微波智能烧烤炉 Electric Microwave Roaster
控制器 Control	电子控制器 Digital CTL
产品尺寸 (mm) Product Size WxDxH	1030 × 841 × 1327
内膛规格 Chamber Size (mm)	482 × 641 × 775
电压 / 频率 Voltage & Frequency	380V 50Hz
温度范围 (℃) Temp.Range	30~300℃
容量 Capacity	6 只烤鸭 (6 Ducks)
总功率 Rated Power	18.3kW
最大食品装载量 Capacity（kg）	6 只鸭（约 30kg） 6 Ducks, about 30kg

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

歌兰德炸炉系列
GRANDFRYER® series

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.





IOT WIRELESS INTERCONNECTION

IOT 无线互联

智能互联允许通过智能设备实时连接访问您的设备。

Smart connect allows real-time access to your device via any smart device.

GRANDFRYER® 歌兰德炸炉系列旨在向专业级用户提供精准、节能、口感一致的烹饪解决方案。其配备的智能电脑控制板，其存储的每个菜单均由 **FLEX SMART® COOKING** 精准控制和多段烹饪智能控制，操作简单，专业级出品品质，口感一致，不因操作者差异而影响出品。

GRANDFRYER® Series fryer provides precise control, energy saving and consistency of cooking result for commercial kitchen. It is equipped with intelligent control panel, every stage of a menu is perfectly controlled by **FLEX Smart® Cooking system.** It has user-friendly simple operation, professional outcomes, consistent food texture which is not affected by different operators.

GRANDFRYER® FEATURES ／产品特点


- 超高的能效与生产能力
- 全不锈钢油缸与柜体，表面精细喷砂处理
- 多种油缸尺寸可供选择，满足您的运营需求
- 可翻转的带状加热管易于清洁
- 电脑板控制，多达 24 个菜单存储能力，任意调用
- 温度探头精度达到 ±1° C
- 温度范围 :195 °F (91° C) 到 385 °F (196° C)
- 1–1/2"的泄油阀快速泄油，防止堵塞
- 配备高温保护开关、防倾斜开关、泄油阀开关
- 24V 弱电控制系统更加安全
- 冷油区防止食物碎屑碳化
- 9 寸调节脚及万向轮稳定可靠
- 免工具拆卸炸篮挂板，方便清洁
- 配置：2 个分槽炸篮
- 可选配 IOT 功能

- Super high energy efficiency and production capacity
- All stainless steel structure with beadblast finished surface, and food grade steel frypot
- Numerous sizes of frypot for options to match different product frying applications
- Swing-up heating element, cleaning is easier
- Up to 24 programmable menu items
- Durable and snap-action probe with high grade accuracy ±1°C
- Frying temperature range from 195°F (91°C) to 385°F (196°C)
- 1-1/2" drain valve
- Equipped with hi-limit switch, anti-tilt switch, drain valve switch
- Safe with 24V low current control system
- Wide frypot (s) with cool zone design, helping collect food debris and prevent it carbonized
- Furnished with 9" heavy duty legs in front and bearing wheel castors with brakes in rear
- Toolless removable hanger mounted on the back splash for baskets
- Twin size baskets
- Optional IOT function




免工具拆卸炸篮挂板，
方便清洁

Toolless removable hanger mounted on the back splash for baskets



电脑板控制，多达 24 个
菜单存储能力，任意调用


Computer board control, up to 24 menu storage capabilities, arbitrary call

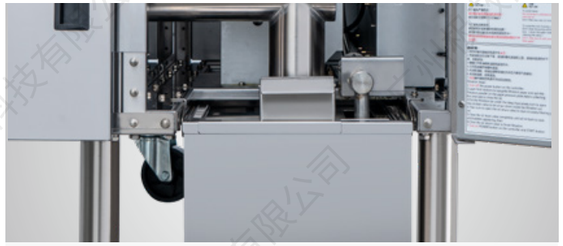

内置滤油系统

不但节约了使用空间，而且在保证烹炸食物保持高质量出品同时，还极大延长了油品的使用寿命，降低运营成本

The built-in oil filtering system not only saves the space, but also ensures that the fried food maintains high-quality outcome, while also greatly extending the service life of the oil and reducing operating costs

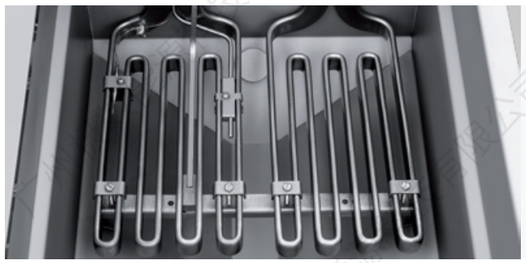

热效率极高且易清洁维护的带状加热管

能够快速回温，实现食物表面金黄酥脆且保持内部水分不流失的效果

Flat-bar heating element transfers heat more efficiently. With snap-action probe, heating element(s) heats up rapidly when it detects a change in the load and/or a drop in temperature, which helps to return to proper temperature faster

To achieve the effect that the surface of the food is golden and crispy and keep the internal moisture not lost

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

ELECTRIC FRYER
落地式升降电炸炉



智能升降 · 稳定出品 · 解放双手
Smart Lift · Consistent Quality · Hands-Free Operation

不锈钢材质升降炸篮
Stainless Steel Lifting Frying Basket

耐腐蚀、抗高温，保障油品与食材纯净安全

Corrosion-resistant, high-temperature resistant, ensuring purity and safety of both oil and ingredients



自动沥油
Automatic Oil Draining

炸制结束即刻提升，减少油脂吸附，成品干爽不腻

Basket lifts immediately after frying to reduce oil absorption for cleaner, less-greasy food



简易清洁
Easy-Clean Design

可拆卸篮筐 + 平整机身，无卫生死角，清洁更便捷

Detachable basket and flat surfaces eliminate hygiene dead corners and simplify cleaning



自动升降与定时系统协同
Automatic Lift & Timing Coordination

确保油温与时间稳定，色泽金黄、外酥里嫩

Stable oil temperature and timing ensure a golden color with a crispy outside and tender inside texture



精准控温
Precise Temperature Control

防止碳化残渣，延长油品寿命

Prevents carbonized residues and extends oil life

智能定时
Smart Timing Control

精准控时，出品火候一致，操作更轻松

Precise timing ensures consistent doneness and easier operation

一键升降系统
One-Touch Lift System

轻触按钮，自动下沉或升起，无需手持操作，安全省心

Automatic lowering and lifting with a single button—hands-free, safe, and effortless

强化机身设计
Reinforced Body Structure

稳固可靠，适应高频商用，降低维护成本

Stable and durable for high-frequency commercial use, reducing maintenance costs

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

产品规格表
MODEL TABLE



产品型号 Model	NTP14EF
名称 Name	单槽滤油电炸炉 Full Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (17.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	355 × 420 × 120 (14"×16.5"×4.7")
包装尺寸 (mm) Packing Size WxDxH	890 × 520 × 1300
容量 Capacity	26.8L(53.6lb)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	14kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	100
毛重 Gross Weight (kg)	120
认证类型 Certificate	



产品型号 Model	NTP14ESF
名称 Name	双槽滤油电炸炉 Dual Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (7.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/ 分槽
包装尺寸 (mm) Packing Size WxDxH	890 × 520 × 1300
容量 Capacity	13.4L×2(26.8lb×2)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	14kW(7kW×2)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	12 / 槽 x2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	106
毛重 Gross Weight (kg)	126
认证类型 Certificate	



产品型号 Model	NTP184EF
名称 Name	单槽滤油电炸炉 Full Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	507 × 797 × 1143 (20"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450 × 420 × 120(17.7"×16.5"×4.7")
包装尺寸 (mm) Packing Size WxDxH	900 × 593 × 1300
容量 Capacity	33.6L(67.2lb)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	17kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	105
毛重 Gross Weight (kg)	132
认证类型 Certificate	



产品型号 Model	NTP14E
名称 Name	单槽电炸炉 Full Vat Electric Fryer
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (17.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	355 × 420 × 120 (14"×16.5"×4.7")
包装尺寸 (mm) Packing Size WxDxH	890 × 520 × 1092
容量 Capacity	26.8L(53.6lb)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	14kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	-
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	82
毛重 Gross Weight (kg)	102
认证类型 Certificate	



产品型号 Model	NTP14ES
名称 Name	双槽电炸炉 Dual Vat Electric Fryer
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (17.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/ 分槽
包装尺寸 (mm) Packing Size WxDxH	890 × 520 × 1092
容量 Capacity	13.4L×2(26.8lb×2)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	14kW(7kW×2)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	12/ 槽 × 2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	-
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	85
毛重 Gross Weight (kg)	105
认证类型 Certificate	



产品型号 Model	NTP184E
名称 Name	单槽电炸炉 Full Vat Electric Fryer
产品尺寸 (mm) Product Size WxDxH	507 × 797 × 1143 (20"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450 × 420 × 120 (17.7"×16.5"×4.7")
包装尺寸 (mm) Packing Size WxDxH	900 × 593 × 1300
容量 Capacity	33.6L(67.2lb)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	17kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	84
毛重 Gross Weight (kg)	110
认证类型 Certificate	

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



产品型号 Model	NTP14-2RSEF
名称 Name	三槽滤油电炸炉 Three Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	870 × 797 × 1143 (34.3"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/ 分槽 355 × 420 × 120 (14"×16.5"×4.7")/ 全槽
包装尺寸 (mm) Packing Size WxDxH	980 × 910 × 1300
容量 Capacity	26.8L+13.4L×2(53.6lb+26.8lb×2)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	28kW (14kW+7kW×2)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽 +12/ 槽 ×2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~ , 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	176
毛重 Gross Weight (kg)	206
认证类型 Certificate	



产品型号 Model	NTP7-3EF
名称 Name	三槽滤油电炸炉 Three Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	653 × 797 × 1143 (25.7"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/ 分槽
包装尺寸 (mm) Packing Size WxDxH	765 × 910× 1 300
容量 Capacity	13.4L×3(26.8lb×3)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	21kW(7kW×3)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	8/ 槽 ×3
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~ , 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	143
毛重 Gross Weight (kg)	175
认证类型 Certificate	



产品型号 Model	NTP7-4EF
名称 Name	四槽滤油电炸炉 Four Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	870 × 797 × 1143 (34.3"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/ 分槽
包装尺寸 (mm) Packing Size WxDxH	980 × 910 × 1300
容量 Capacity	13.4L×4(26.8lb×4)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	28kW(7kW×4)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	12/ 槽 ×4
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~ , 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	188
毛重 Gross Weight (kg)	230
认证类型 Certificate	



产品型号 Model	NTP14-2EF
名称 Name	双槽滤油电炸炉 Dual Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	870 × 797 × 1143 (34.3"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	355×420×120 (14"×16.5"×4.7")/ 全槽
包装尺寸 (mm) Packing Size WxDxH	980 × 910 × 1300
容量 Capacity	26.8L×2(53.6lb×2)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	28kW (14kW × 2)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽 ×2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	168
毛重 Gross Weight (kg)	198
认证类型 Certificate	



产品型号 Model	NTP184-2EF
名称 Name	双槽滤油电炸炉 Dual Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	1014 × 797 × 1143 (39.9"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450×420×120 (17.7"×16.5"×4.7")/ 全槽
包装尺寸 (mm) Packing Size WxDxH	1120 × 910 × 1300
容量 Capacity	33.6L×2(67.2lb×2)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	34kW(17kW×2)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽 ×2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	175
毛重 Gross Weight (kg)	208
认证类型 Certificate	



产品型号 Model	NTP184-3EF
名称 Name	三槽滤油电炸炉 Three Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	1521 × 797 × 1143 (59.9"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450×420×120 (17.7"×16.5"×4.7")/ 全槽
包装尺寸 (mm) Packing Size WxDxH	1625 × 910 × 1300
容量 Capacity	33.6L×3(67.2lb×3)
电压 / 频率 Voltage & Frequency	380-415V 3N~, 220-240V 3~, 50/60Hz
额定功率 Rated Power	51kW(17kW×3)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽 ×3
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	245
毛重 Gross Weight (kg)	288
认证类型 Certificate	

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

GAS FRYER
燃气炸炉

GRANDFRYER® FEATURES ／ 产品特点

- 全不锈钢油缸，表面精细喷砂处理
- 内置滤油系统
- 清洁模式、融油模式
- 电脑板智能控制
- 温度探头精度达到 ±1℃
- 温度范围：195 ℉ (91℃) 到 385 ℉ (196℃)
- 1–1/2”的泄油阀快速泄油，防止堵塞
- 配备高温保护开关、泄油阀开关
- 24V 弱电控制系统更加安全
- 深冷油区防止食物碎屑碳化
- 9”调节脚及万向轮稳定安全
- 可拆卸清洗的炸篮挂板，无需任何工具
- 可选配 IOT 功能

- All stainless steel structure with fine sand blasting surface, and food grade steel oil tank
- Built in oil filter system
- Clean mode & oil meltdown mode
- Intelligent computer controller
- Temperature probe accuracy ±1℃
- Temperature range: 195°F to 385°F (91°C~196°C)
- 1-1/2" oil drain valve
- Hi-limit switch, drain valve switch
- 24V control system is more secure
- Cool zone design, help to collect food debris and prevent it carbonized
- 9" adjustable legs & universal castor wheels
- Toolless removable basket hanger is easy for cleaning
- Optional IOT function









产品型号 Model	NTP14GF	NTP14-2GF	NTP14-3GF
产品尺寸 (mm) Product Size WxDxH	434×797×1156 (17.1"×31.4"×45.5")	870×797×1156 (34.3"×31.4"×45.5")	1305×797×1156 (51.4"×31.4"×45.5")
烹饪区域 (mm) Cooking Area. WxDxH	360×357×90 (14.2"×14.1"×3.5")	360×357×90/ 槽 (14.2"×14.1"×3.5"/Vat)	360×357×90/ 槽 (14.2"×14.1"×3.5"/Vat)
包装尺寸 (mm) Packing Size WxDxH	520×890×1300	520×890×1300	520×890×1300
容量 Capacity (Liter)	24L (48lb)	24L×2(48lb×2)	24L×3 (48lb×3)
电压 Voltage	220-240V~,50Hz	220-240V~,50Hz	220-240V~,50Hz
额定功率 Rated Power (kW)	70,000BTU	70,000BTU×2	70,000BTU×3
控制方式 CTL	GF001	GF001	GF001
预存菜单 Menu	24 个	24 个 ×2	24 个 ×3
防水等级 IP Rating	IPX4	IPX4	IPX4
滤油系统 Filtration System		220-240V ~,50/60HZ 250W	
净重 Net Weight (kg)	100	168	235
毛重 Gross Weight (kg)	120	198	275
升降系统选装 Optional lifting system	可选 Optional	可选 Optional	可选 Optional

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

ELECTRIC FRYER
经济型单槽电炸炉


GRANDFRYER® FEATURES ／ 产品特点

- 全不锈钢油缸，表面精细喷砂处理
- 智能控温，确保油温的精准度和稳定性
- 搭配智能控制电脑板，支持 6 个菜单存储能力
- 带状发热管设计，实现超高的热效率，降低能耗
- 温度探头精度达到 ±1℃，实时精准捕温
- 温度范围：195 ℉ (91℃) 到 385 ℉ (196℃)
- 1–1/2”的泄油阀快速泄油，防止堵塞
- 配备高温保护、泄油阀保护、防倾斜保护装置
- 冷油区防止食物碎屑碳化
- 24V 弱电控制系统更安全
- 6”调节脚稳定可靠（可选万向轮）
- 免工具拆卸清洗的炸篮挂板
- 配置：2 个分槽炸篮

- All stainless steel structure with bead blast finished surface
- Intelligent temperature control ensures accurate and stable oil temperature
- Equipped with an intelligent control board, it supports the storage of 6 menus
- The strip heating element design achieves ultra-high thermal efficiency and reduces energy consumption
- Temperature probe accuracy reaches ±1°C
- Temperature range from 195°F (91°C) to 385°F (196°C)
- 1-1/2" drain valve
- Equipped with hi-limit switch, drain valve switch
- Wide frypot with cool zone, to prevent carbonization
- 24V control system is more secure
- 6" adjustable heavy duty legs(bearing wheel castors are available for option)
- Toolless removable hanger mounted on the back splash for baskets
- Twin size baskets









产品型号 Model	NTG14E
产品尺寸 (mm) Product Size WxDxH	434×713×1006 (17.1"×28.1"×39.6")
烹饪区域 (mm) Cooking Area. WxDxH	380×363×80 (15"×14.3"×3.1")
包装尺寸 (mm) Packing Size WxDxH	500×785×1130
容量 Capacity (Liter)	23L(46lb)
电压 Voltage	380V 3N~,50/60Hz
额定功率 Rated Power	11.8kW
控制方式 CTL	电脑板 Computer
预存菜单 Menu No.	6 个
防水等级 IP Rating	IPX4
净重 Net Weight (kg)	48
毛重 Gross Weight (kg)	64

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司

COUNTERTOP FRYER
单双槽台上式炸炉

GRANDFRYER® FEATURES ／ 产品特点

- 全不锈钢结构
- 一体拉伸油缸，冷油区设计
- 可编程电脑板，可预存 6 个菜单
- NTC 感温探头
- 低功率密度带状发热管，热传导更加均匀快捷，寿命更加长
- 控温范围 :195 ℉~385 ℉ (91℃~196℃)
- 3/4 英寸可拆泄油管
- 高温保护开关
- 防倾斜开关
- 发热管可翻转清洗
- 烹饪区域 :257×340×60mm
- 油量 :10L/ 槽
- 烹饪完毕蜂鸣提醒
- 标配炸篮 1 个 / 槽

- Stainless steel construction
- One-piece deep-drawn frypot,food hygiene design with cold zone
- Programmable control panel with a max. of 6 menu items
- NTC temperature probe
- Flat-bar heating element, low watt density and providing even heat distribution and longer service life
- Swing-up heating element makes cleaning a snap
- Cooking temperature ranges from 195°F to 385°F (91°C~196°C)
- 3/4 inch drain valve
- Oil capacity: 10L per vat
- Hi-limit switch, anti-tilt switch
- Cooking area 257×340×60mm
- Buzz when cooking done
- One frying basket per vat











设备名称 Name	NTT10E			NTT10-2E		
产品型号 Model	单槽台上式炸炉 Single Vat Countertop Fryer			双槽台上式炸炉 Dual Vat Countertop Fryer		
产品尺寸 (mm) Product Size WxDxH	350×700×480(13.8"×27.6"×18.9")			680×700×480(26.8"×27.6"×18.9")		
烹饪区域 (mm) Cooking Area WxDxH	257×340×60(10.1"×13.4"×2.4")			257×340×60(10.1"×13.4"×2.4")/ 槽		
包装尺寸 (mm) Packing Size WxDxH	384×780×578			714×780×578		
容量 Capacity (Liter)	10L (20lb)			10L×2 (20lb×2)		
电压 Voltage	380V 3N~ 50Hz	400V 3N~ 50Hz	240V 3~ 60Hz	380V 3N~ 50Hz	400V 3N~ 50Hz	240V 3~ 60Hz
功率 Power	5.5kW	6kW	6.5kW	11kW	12kW	13kW
控制方式 CTL	电脑板 Computer			电脑板 Computer		
预存菜单 Menu No.	6			6 / 槽 x2		
防水等级 IP Rating	IPX3			IPX3		
净重 Net Weight (kg)	22.5			38.5		
毛重 Gross Weight (kg)	25			44		

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

AUTO-LIFT COUNTERTOP FRYER
台上式升降炸炉

GRANDFRYER® FEATURES ／ 产品特点

- 全不锈钢结构
- 油缸可拆卸，便于清洁
- 自动升降功能，一键操作，全自动完成食物的油炸烹饪
- 可编程电脑板 , 3 段烹饪，9 个预存菜单 +1 个临时餐单
- 重载、超重载烹饪控制
- 控温范围：76~391˚F（25~200˚C）
- 高温保护开关
- 防倾斜开关
- 发热管可翻转清洗
- 烹饪完毕蜂鸣提醒
- 标配炸篮 1 个 / 槽
- 220V 16A, 配带插头电源线 2 米

- Stainless steel construction
- Removable oil vat for easy cleaning
- Basket automatically lift-up when cooking done
- 9 menu key pads (+1 temporary menu), 3 programmable stages for each cooking cycle
- Automatically extend cooking time when adding extract portions
- Temperature range: 76~391°F (25~200°C)
- Hi-Limit switch
- Anti-Tilt switch
- Swing-up heating element makes cleaning a snap
- Buzz when cooking done
- Standard configuration: 1 basket/vat
- 220V 16A with plug power cord 2 meters







设备名称 Name	NTT8E
产品型号 Model	单槽台上式炸炉 Single Vat Countertop Fryer
产品尺寸 (mm) Product Size WxDxH	265×575×425(10.4"×22.6"×16.7")
烹饪区域 (mm) Cooking Area WxDxH	240×300×100 (9.4"×11.8"×3.9")
包装尺寸 (mm) Packing Size WxDxH	345×645×555
容量 Capacity (Liter)	5L (10lb)
电压 Voltage	220-240V ~, 50/60Hz
功率 Power (kW)	3.2
预存菜单 Menu No.	9
防水等级 IP Rating	IPX3
净重 Net Weight (kg)	17
毛重 Gross Weight (kg)	19.5
认证类型 Certificate	CE

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



履带式电热披萨炉
GRANDOVEN® series

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

NTE-1620-T 是 **GRANDOVEN®** 电力履带式烘炉系列产品之一，紧凑的设计令它非常适合厨房不大的连锁店或者外带类快捷服务店使用，同时因它可层叠式的设计（可堆叠 2 层），令用户在节省空间同时满足用餐高峰时段的出品需求。

NTE-1620-T is one of **GRANDOVEN®** series electric baking oven. It is ideally suited for express-style or chain restaurants where smaller ovens are required yet provide high baking output as its self-contained, conveyorized and stackable up to two (2) units high.

可烹饪菜单 COOKING MENU

各种披萨 / 鸡翅 / 焗饭等等

Pizza, Chicken wings, Baked Rice, etc.

IOT WIRELESS INTERCONNECTION

IOT 无线互联

智能互联允许通过智能设备实时连接访问您的设备。

Smart connect allows real-time access to your device via any smart device.



NTE-1620-T



NTE-2090



NTE-2060



NTE-32101-T

ELECTRIC CONVEYOR OVEN
履带式电热披萨炉


GRANDOVEN®
FEATURES ／ 产品特点

- 热风冲击加热技术，通过热风喷流技术和环流热风循环作用于食物表面，使得 食物加热更加迅速，口感更加松脆
- 可堆叠摆放，节省空间，同时满足高峰时段出品需求
- PID 算法微处理器，精确控制烘焙时间和传送带速度
- 全不锈钢结构，更符合食品卫生要求
- 正面钢化玻璃视窗，不锈钢把手，清洁更加容易
- 落地式设计，5 寸带刹重型脚轮
- 免工具拆卸面板
- 传送带正反转功能
- 5 寸触摸屏

- Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
- Can be stacked to save space while meeting production requirements during peak hours
- With PID Microprocessor controller, baking temperature and time are always under perfect control
- All stainless steel structure, complies with requirements
- Floor-type design with 5" heavy duty castors, all with brakes
- Toolless-open access panels
- Reversible conveyor direction
- 5-inch touch screen



操作简便，控制精准
Simply and easy operation.



正面钢化玻璃视窗，不锈钢把手，清洁更加容易
All stainless steel structure, comply with food hygiene requirements



落地式设计，5 寸带刹重型脚轮
Floor-type design with 5" heavy duty castors, all with brakes

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

优化风道，高效节能
High Efficent and Low Energy Consumption

采用进口耐高温特殊混流涡轮风叶，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，热效率非常高。


The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.




NTE-32101



NTE-32140-T







产品型号 Model		NTE-32101	NTE-32140-T
宽 Width (mm)		2048	2358
深 Depth (mm)		1410	1544
总高 (mm) Overall Height	单层 Single Stack	1186	1091
	双层 Double Stack	1542	1600
	三层 Tri-Stack	1969	1757
包装尺寸 Packing Size W×D×H (mm)		2160×1580×824	2650×1930×840
烘焙内胆长度 Long Cooking Chamber (mm)		1010	1397
传送链宽 Belt Width (mm)		813	813
最高温度 Max Operation Temp		300℃	300℃
功率 Power	每层 (Per Deck)	27kW	27kW
时间调节 Bake Time Range		1 ～ 14 分钟 (minutes)	1~14 分钟（minutes）
电压 Volts		380V 3N ～	380V 3N~
频率 Hz		50Hz	50Hz
防水等级 IP Rating		IPX3	IPX4
净重 Net Weight (kg)		419	410
毛重 Gross Weight (kg)		498	500

ELECTRIC CONVEYOR OVEN
履带式电热披萨炉

GRANDOVEN® FEATURES ／产品特点

- 热风冲击加热技术，通过热风喷流技术和环流热风循环作用于食物表面，使得食物加热更加迅速，口感更加松脆
- 正面钢化玻璃视窗，不锈钢把手，清洁更加容易
- 挡风板高度可调，从而降低热量损失，减少食材大小的局限性
- 最高可堆叠 3 层，节省空间，同时满足更大量的出品需求
- PID 算法微处理器，精准控制烘焙温度和传送带速度，烘焙品质极佳
- 全不锈钢结构，更符合食品卫生要求
- 落地式设计，5 寸带刹重型脚轮
- 免工具拆卸面板
- 传送带正反转功能

- Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
- Front-access window, robust stainless steel handle
- The height of the windshield is adjustable to reduce heat loss and reduce the limitation of the size of the food
- Stackable up to 3 units high
- With PID Microprocessor controller, baking temperature and time are always under perfect control
- All stainless steel structure, complies with requirements
- Floor-type design with 5" heavy duty castors, all with brakes
- Toolless-open access panels
- Reversible conveyor direction









* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

上下热风冲击加热技术
Hot Air Impingement Technology

采用进口耐高温特殊混流涡轮风叶，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，热效率非常高。

The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.


NTE-2060


NTE-2060-T


NTE-2090


NTE-2090-T

产品型号 Model		NTE-2060	NTE-2060-T	NTE-2090	NTE-2090-T
控制方式 CTL		CTT+ 按键型 (Digital CTL)	5 寸触摸屏 (5" Touch Screen CTL)	CTT+ 按键型 (Digital CTL)	5 寸触摸屏 (5" Touch Screen CTL)
宽 Width (mm)		1173 (含两边挡板 :1599 with extention sheet plates)	1173 (含两边挡板 :1599 with extention sheet plates)	1533 (含两边挡板 :1927 with extention sheet plates)	1533 (含两边挡板 :1927 with extention sheet plates)
深 Depth (mm)		1078	1078	1124	1124
总高 Overall Height (mm)	单层 Single Stack	1061	1061	1125	1125
	双层 Double Stack	1528	1528	1592	1592
	三层 Tri-Stack	1760	1760	1759	1759
包装尺寸 Packing Size W×D×H (mm)		1250×1180×650	1250×1180×650	1670×1230×780	1670×1230×780
烘焙内胆长度 long Cooking Chamber (mm)		610	610	910	910
传送链宽 Belt Width (mm)		530	530	530	530
最高温度 Max. Operation Temp.		300℃	300℃	300℃	300℃
功率 Power / 每层 (Per Deck)		12.3kW	12.3kW	17kW	17kW
时间调节 Bake Time Range		2~14 分钟 (minutes)	2~14 分钟 (minutes)	1~14 分钟 (minutes)	1~14 分钟 (minutes)
电压 Volts		380-415V 3N~, 220-240V 3N~	380-415V 3N~, 220-240V 3N~	380-415V 3N~, 220-240V 3N~	380-415V 3N~, 220-240V 3N~
频率 Hz		50/60Hz	50/60Hz	50/60Hz	50/60Hz
防水等级 IP Rating		IPX3	IPX3	IPX3	IPX3
净重 Net Weight (kg)		170	170	260	260
毛重 Gross Weight (kg)		202	202	306	306
认证类型 Certificate		CE	-	CE	-

ELECTRIC CONVEYOR OVEN
履带式电热披萨炉

GRANDOVEN® FEATURES ／产品特点

- 热风冲击加热技术，通过热风喷流技术和环流热风循环作用于食物表面，使得食物加热更加迅速，口感更加松脆
- 采用特殊混流涡轮风轮，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，烘焙效果更加出色
- 挡风板高度可调，从而降低热量损失，减少食材大小的局限性
- 可堆叠摆放，节省空间，同时满足高峰时段出品需求
- OPD 算法微处理器，精确控制烘焙时间和传送带速度，温控更加精准烘焙
- 全不锈钢结构，更符合食品卫生要求
- 内置催化剂具备除臭，抗污染功能
- 传送带长度尺寸可选：32 寸 /37 寸 /50 寸
- 标配 4 寸重力脚
- 免工具拆卸面板
- 传送带正反转功能
- 5 寸触摸屏
- 座台式设计

- Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
- The special mixed-flow turbine wind wheel is used to integrate the properties of axial flow and circulation, so that the high-temperature airflow has DC impact and uniformity of circulation, and the baking effect is even better
- The height of the windshield is adjustable to reduce heat loss and reduce the limitation of the size of the food
- Can be stacked to save space while meeting production requirements during peak hours
- With OPD Microprocessor controller, baking temperature and time are always under perfect control
- All stainless steel structure, complies with requirements
- Conveyor belt size optional: 32 inches / 37 inches / 50 inches
- Furnished with 4" heavy duty legs
- Toolless-open access panels
- Reversible conveyor direction
- 5 inch touch screen
- Countertop design



全不锈钢结构，更符合食品卫生要求
All stainless steel structure, comply with food hygiene requirements



操作简便，控制精准
Simply and easy operation.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

优化风道，高效节能
High Efficent and Low Energy Consumption

采用进口耐高温特殊混流涡轮风叶，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，热效率非常高。

The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.





NTE-1620-V

NTE-1620-T

产品型号 Model		NTE-1620-V	NTE-1620-T
控制方式 CTL		CTT+ 按键型 (Digital CTL)	5 寸触摸屏 (5" Touch Screen CTL)
宽 Width (mm)		1000 (含两边挡板 :1400 with extention sheet plates)	1032 (含两边挡板 :1400 with extention sheet plates)
深 Depth (mm)		826	826
总高 (mm) Overall Height	单层 Single Stack	467	467
	双层 Double Stack	837	837
包装尺寸 Packing Size W×D×H (mm)		1100×920×620	1100×950×620
烘焙内胆长度 long Cooking Chamber (mm)		518	518
传送链宽 Belt Width (mm)		436	436
最高温度 Max. Operation Temp.		300℃	300℃
功率 Power / 每层 (Per Deck)		6.7kW	6.7kW
时间调节 Bake Time Range		1'25"~11 分钟 (minutes)	1'25"~11 分钟 (minutes)
电压 Volts		380-415V 3N~, 220-240V ~	380-415V 3N~, 220-240V ~
频率 Hz		50/60Hz	50/60Hz
防水等级 IP Rating		IPX3	IPX3
净重 Net Weight (kg)		85	85
毛重 Gross Weight (kg)		107	107
认证类型 Certificate		CE	CE ETL FC

CONVEYOR FISH ROASTER
链式烤鱼炉

GRANDOVEN® FEATURES ／产品特点

- 高温高效无烟电热管，热辐射超 600℃，工作最高温度 450℃，超温保护
- 模块化设计，上下层堆叠，节省空间，满足大批量出品需求，独立控制，确保营业不间断
- PID 算法微处理器，精确控制烘烤温度和传送带速度，烘烤品质极佳
- 烘烤内膛长度 830mm，传送链宽 530mm，适合各种食材烘烤
- 大容量水盆，确保食物嫩而不柴，接油降温，杜绝火患，水满自溢，一键式电磁阀供水
- 双散热风扇，炉体体表低温，电器元件寿命长，指示灯实时监控发热管信息
- 超厚环保保温棉，上下温差浮动 3℃，内膛上部独特设计聚能板，高效节能
- 选配食材烘烤计数功能，后台 wifi 数据传送查询，方便各营业点数据收集管控
- 全不锈钢结构，更符合食品卫生要求
- 落地式设计，5 寸带刹重型脚轮
- 传送带正反转功能

- High-temperature and high-efficiency smokeless electric heating element, heat radiation over 600℃, maximum working temperature 450℃, hi-limiter protection
- Dual-deck and independent control system design
- With PID Microprocessor controller, baking temperature and time are always under perfect control
- The length of the baking chamber is 830mm, and the width of the conveyor chain is 530mm, suitable for cooking all kinds of food
- The large-capacity water basin ensures that the food is tender. It catches the oil to cool down the roaster, prevents fire and the water overflows by itself. One-button solenoid valve for water supply
- Dual cooling fans, low temperature on the surface of the roaster body, long life of electrical components. Indicator light to monitor heat pipe information in real time
- Ultra environmentally friendly thermal insulation cotton. The temperature deviation is 3℃. The upper part of the inner chamber is uniquely designed with energy-collecting plate, which is highly efficient and energy-saving
- Counting function, wifi data transmission and query, it is convenient for data collection and control at various shops
- All stainless steel structure and hygiene design
- Free standing design, 5 inch heavy duty casters with brake
- Reversible conveyor direction





产品型号 Model	NTF20-1S	NTF20-1D
名称 Name	单层链式烤鱼炉 Single Deck Conveyor Fish Roaster	双层链式烤鱼炉 Dual Deck Conveyor Fish Roaster
宽 Width (mm)	1580	1580
深 Depth (mm)	752	752
总高 Overall Height (mm)	853	1424
最高温度 Max. Operation Temp.	450℃	450℃
功率 Power / 每层 (Per Deck)	15kW	15kW x2
时间调节 Bake Time Range	1~14 minutes	1~14 minutes
电压 Volts	380-415V 3N~	380-415V 3N~, 220-240V ~
频率 Hz	50/60Hz	50/60Hz
防水等级 IP Rating	IPX3	IPX3

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



CLAMSHELL GRILL LITE

单双头双面煎扒炉

双面煎扒炉专为烹饪牛肉饼，鸡肉三明治，帕尼尼以及卷饼等食物而设计。
Clamshell Grill Lite is designed to cook beef patties, chicken, sandwiches, panini and wraps etc.

GRANDGRILL® FEATURES ／ 产品特点

- 简洁的设计，上下煎板同时烹饪两面，将烹饪时间减少多达 50%
- 上煎板铰链配有阻尼设计，可适应不同厚度的产品，并可自动定位为 45˚ / 85˚
- 上煎板和下煎板可以独立控制温度，工作温度范围从 30˚C 至 288˚C
- 煎板有侧防溅保护装置，防止油脂溢出及过热安全保护，便于操作和安全保护
- 可拆卸油脂盒，便于清洁

- Compact and portable design. The upper and lower grill plates cooking both sides simultaneously, reducing cook time by up to 50%
- Upper plate hinge equipped with damping design to accommodate various of product thickness, and can be positioned at 45° / 85° automatically
- Upper plate and lower platen can be on/off controlled independently with operating temperature from 30°C up to 288°C
- Side splash guard on lower platen panel to protect against grease spills / upper heat safety guard in place for easy operation and safety protection
- Removable grease box foreasy cleanup



NTCS1F



NTCS2F

产品型号 Model	NTCS1F	NTCS2F
产品尺寸 (mm) Dimension WxDxH2/H1	354×660×437 (13.9"×25.9"×17.2")	704×660×437 (27.7"×26"×17.2")
烹饪区域 (mm) Cooking area WxDxH	300×400 (11.8"×15.7")	300×400 (11.8"×15.7") ×2
包装尺寸 (mm) Packing Size WxDxH	526×820×625	876×820×625
电压 \ 频率 Voltage & Frequency	220V~ 380V 3N~ 50/60Hz	380V 3N~ 50Hz
功率 Power (kW)	5.25	5.25+5.25
扒板厚度 (mm) Grill Plate Thickness	上扒板 (Upper griddle) 20 下扒板 (Lower griddle) 18	上扒板 (Upper griddle) 20 下扒板 (Lower griddle) 18
净重 Net Weight (kg)	54	115
毛重 Gross Weight (kg)	57	120

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司



COUNTERTOP HEAVY-DUTY GRIDDLE
24 寸 /36 寸台式扒炉

COUNTERTOP HEAVY-DUTY GRIDDLE
24 寸 /36 寸台式扒炉

GRANDGRILL® FEATURES ／产品特点

- 从室温加热至 260℃只需 19 分钟
- 厚度达到 24mm 的重型扒板
- 光亮、耐磨的镀铬表面
- 镀铬表面减少超过 20% 的清洁时间和清洁剂
- 插进扒板的温度探针确保控温精准 (烹饪区域 ±5℃)
- 3.8”英寸高的围边防止油脂飞溅
- 热效率极高的带状电热管
- 每 12 英寸独立控温
- 精准的温度控制器（探针精度 ±1℃ ）
- 台面带有凹陷的油脂收集口
- 易于清洗的集油槽
- 液晶显示器

- Heat up rapidly. Only take 19 minutes to reach temperature 260°C from ambient 25°C
- Up to 24mm thickness steel griddle plate with chrome finished surface
- Chrome finished griddle plate makes cleaning very easy and save cleaner by 20%
- 3.8inch splash plate
- The temperature probe inserted into the grill plate ensures accurate temperature control (cooking area ±5°C)
- Flat-bar type heating element. Heat transfers more efficiently
- Independent temperature control every 12 inches
- Accurate temperature controller (probe accuracy ±1°C)
- Recessed grease collection port on the top
- Removable oil tray at bottom
- LCD display



NTL24



NTL36

产品型号 Model	NTL24	NTL36
产品尺寸 (mm) Dimension WxDxH2/H1	614x747x405	919x747x405
烹饪区域 (mm) Cooking area WxDxH	610x610	915x610
包装尺寸 (mm) Packing Size WxDxH	860x730x590	1030x880x580
电压 \ 频率 Voltage & Frequency	380-415V 3N~ 240V 3~, 50/60Hz	380-415V 3N~ 240V 3~, 50/60Hz
功率 Power (kW)	8kW	12kW
扒板厚度 (mm) Grill Plate Thickness	24	24
净重 Net Weight (kg)	108	156
毛重 Gross Weight (kg)	132	185

* 坑扒可选 Customized grill plate is available for option

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

乐飘逸系列·高温智能蒸柜

Lapiioey® series

灵活组合 | 任意搭配

FLEXIBLE COMBINATION · ARBTRARY COLLOCATION

- 二次加热 Secondary heating
- 独立大锅炉 Independent boiler
- 自动提醒锅炉除垢 Descaling reminder
- 自由组合 Free combination
- 二次热回收 Heat recycle
- 烹制 / 保温切换 Cook / heat hold switch

ELECTRIC HYPER STEAMER
高温智能蒸柜

Lapiioey® FEATURES ／产品特点

- 蒸汽二次加热功能，比传统蒸柜的蒸制效率提升約 30%，口感更佳
- 除垢功能，启动后添加指定清洁剂自动开始锅炉水垢清除作业无需手动清除
- 锅炉自动补水功能，可设置间歇补水时间，确保蒸汽强劲，补水 20 次后未到最高水位，一次性补齐到最高水位。
- 排水功能，每天首次开机时，自动排出锅炉脏水，保证品质，或手动按排水键自动排水，配置排水电动阀，排水更干净快捷
- 保温功能，从烹制状态下按保温键可以切换到保温模式，或烹制完成后自动进入保温模式
- 菜单功能，配置 4 个菜单，每个菜单可设置是否高温蒸汽，最长烹制时间 99 分 59 秒，内膛温度到预热温度，才可烹饪，确保烹饪品质
- 蒸汽二次热回收功能，将内膛排出的蒸汽热回收，加热的水再补进锅炉，确保蒸汽持续强劲，提升能效。
- 模块化设计组合，模块间独立控制，即使有故障也能做到营业不间断。故障显示代码，方便快捷排查维修。
- 预约烹饪功能

- During secondary reheating, 30% higher steam efficiency than a tranditional steamer
- After start-up, add the specified detergent to automatically start the boiler scale cleaning operation without manual cleaning
- Automatic water filling of boiler to ensure constantly strong & fresh steam. If water level didn't reach max. after 20 times replenishment, make up to the max. in one time
- Automatically or manually discharge the dirty water from the first power on every day, which ensure steam is clean and fresh. Electric drain valve helps water diacharge of boiler more quickly
- From cooking state press the heat preservation key can switch to heat preservation mode, or after cooking into heat preservation mode automatically
- Built in 4 menus, each of which can be set to high temperature steam or not. Max cooking time is 99'59". Only when chamber temperature reaches to preset, cooking can start
- Built-in heat exchange mainfold system for energy recycle, so steam is efficient and abundant
- Independent module control, even if there is a failure can be achieved uninterrupted business. Problem code is shown on the screen for maintenance
- Reservation cooking function



NTS-2S-L




NTS-4S-L

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



灵活组合，任意搭配
Flexible combination

采用模块化设计可自由组合，这种结构最大的优点在于每台均为独立控制，如其中某台发生故障时不影响其它设备的使用。
Modular design, flexible for any sacale of kitchens

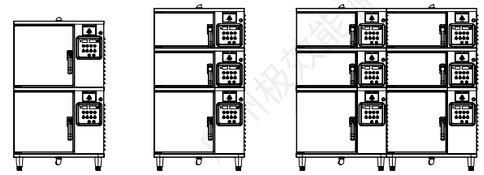

四层叠加四层
Four layers superimposed on four layers

四层叠加两层 ×2
Four layers, two layers×2

四层叠加两层 ×2 加左右组合
Four layers superimposed,two layers×2 plus left and right combination



产品型号 Model	NTS-2S-L（左开门）	NTS-4S-L（左开门）
尺寸 Dimension (mm)	672 × 705 × 450	672 × 705 × 650
内膛尺寸 Chamber size (mm)	350 x 548 x 177	350 x 548 x 377
包装尺寸 (mm) Packing Size WxDxH	740 x 730 x 480	740 x 730 x 680
电压 / 频率 Voltage & Frequency	220-240V ~, 380-415V 3N~, 50/60Hz	220-240V ~, 380-415V 3N~, 50/60Hz
功率 Power	4.4kW	6.4kW
时间调节 Time Range (mm:ss)	00:01~99:59	00:01~99:59
防水等级 IP Rating	IPX4	IPX4
净重 Net Weight (kg)	53	68.5
毛重 Gross Weight (kg)	62	77
认证类型 Certificate	CE	CE

* 设备出厂默认为左开门，可选右开门
* The device defaults to the left opening door, and the right opening door is optional

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

NopeinHold® SERIES
直立保温柜系列










NopeinHold® FEATURES / 产品特点

- 全不锈钢结构
- 可快速更换控制箱发热体
- 数字温控，方便读数 *
- 保湿功能，确保食物口感
- 温度可调，从 25℃ ~99℃
- 耐温磁性门封条
- 适用于面包盘 660×460×25mm 及 GNP1/1×65mm
- 单向开门或者对通开门可选 *
- 脚轮及可调脚可选
- 柜内温差 ± 3 ℃内


- Stainless steel construction
- Interchangeable heating module to make maintenance easy and minimize downtime
- Digital thermometer for fast and clear reading*
- Humidity function helps food to maintain moisture
- Adjustable temperature setting from 25°C~99°C
- Magnetic door gaskets
- Accomodated for both GNP 1/1×65mm and bun pan 660×460×25mm
- Front loading or pass through for options
- Casters or adjustable legs available for options
- The temperature difference inside the cabinet is within ± 3°C



适用全型面包盘 660×460×25 或者 1/1GNP
Accomodated for both 660×460×25mm pan and 1/1GNP



重型自动回归门铰，抬起即拆型门
Self-closing and lift-off doors with tempered glass window



翻转门（可选）
Multi-deck Flip Door (optional)

产品规格表
MODEL TABLE

PS : 可选项目：翻转门。
所有型号的门都可以更换为翻转门
Flip door is available for option





产品型号 Model	HFC-F-M	HFC-P-M
名称 Name	计时式半型单向直立保温柜 Upright Food Holding Cabinet	计时式半型双向直立保温柜 Upright Food Holding Cabinet
特征 Description	单向开门 Front loading	双通门 Pass through
温控类型 Thermostat	电子温控 Electronic control	电子温控 Electronic control
外形尺寸 Product Size W×D×H (mm)	636×832×990	636×859×990
包装尺寸 Packing Size W×D×H (mm)	742×944×1195	742×944×1195
电压 Voltage	220-240V ~, 120V ~	220-240V ~, 120V ~
功率 Power	1.1kW	1.1kW
频率 Frequency	50/60Hz	50/60Hz
防水等级 IP Rating	IPX4	IPX4
层数 Number Of Layers	5	5
面包盘尺寸 Sheet Pan Size (mm)	660×460×25	660×460×25
可放面包盘数量 No. of Sheet Pan	5	5
份数盆尺寸 GNP Size (mm)	530×325×65 (1/1GNP)	530×325×65 (1/1GNP)
可放份数盆数量 No.of GN pan	4	4
认证类型 Certificate	-	-
净重 Net Weight (kg)	93	97
毛重 Gross Weight (kg)	131	135





产品型号 Model	UFC-F-M	UFC-P-M
名称 Name	计时式全型单向直立保温柜 Upright Food Holding Cabinet	计时式全型双向直立保温柜 Upright Food Holding Cabinet
特征 Description	单向开门 Front loading	双通门 Pass through
温控类型 Thermostat	电子温控 Electronic control	电子温控 Electronic control
外形尺寸 Product Size W×D×H (mm)	636×832×1854	636×859×1854
包装尺寸 Packing Size W×D×H (mm)	742×944×2075	742×944×2075
电压 Voltage	220-240V ~, 120V ~	220-240V ~, 120V ~
功率 Power	2.2kW	2.2kW
频率 Frequency	50/60Hz	50/60Hz
防水等级 IP Rating	IPX4	IPX4
层数 Number Of Layers	15	15
面包盘尺寸 Sheet Pan Size (mm)	660×460×25	660×460×25
可放面包盘数量 No. of Sheet Pan	15	15
份数盆尺寸 GNP Size (mm)	530×325×65 (1/1GNP)	530×325×65 (1/1GNP)
可放份数盆数量 No.of GN pan	14	14
认证类型 Certificate	-	-
净重 Net Weight (kg)	162	170
毛重 Gross Weight (kg)	221	229

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

产品规格表
MODEL TABLE

PS：可选项目：翻转门。
所有型号的门都可以更换为翻转门
Flip door is available for option





产品型号 Model	HFC-F/P		UFC-F/P	
名称 Name	电子式半型单向 / 双向直立保温柜 Upright Food Holding Cabinet		电子式全型单向 / 双向直立保温柜 Upright Food Holding Cabinet	
特征 Description	单向开门 Front loading/ 双通门 Pass through		单向开门 Front loading/ 双通门 Pass through	
温控类型 Thermostat	电子温控 Electronic control		电子温控 Electronic control	
外形尺寸 Product Size W×D×H (mm)	636×832×990(单向)/636×859×990(双向)		636×832×1854（单向）/636×859×1854（双向）	
包装尺寸 Packing Size W×D×H (mm)	742×944×1195		742×944×2075	
电压 Voltage	220-240V ~，120V ~		220-240V ~，120V ~	
功率 Power	1.1kW		2.2kW	
频率 Frequency	50/60Hz		50/60Hz	
防水等级 IP Rating	IPX4		IPX4	
层数 Number Of Layers	5		15	
面包盘尺寸 Sheet Pan Size (mm)	660×460×25		660 × 460 × 25	
可放面包盘数量 No. of Sheet Pan	5		15	
份数盆尺寸 GNP Size (mm)	530×325×65 (1/1GNP)		530 × 325 × 65 (1/1GNP)	
可放份数盆数量 No.of GN pan	4		14	
认证类型 Certificate	ETL		ETL	
净重 Net Weight (kg)	91	95	160	168
毛重 Gross Weight (kg)	125	129	219	227





产品型号 Model	EconHold-HF/HP		EconHold-UF/UP	
名称 Name	机械式半型单向 / 双向直立保温柜 Upright Food Holding Cabinet		机械式全型单向 / 双向直立保温柜 Upright Food Holding Cabinet	
特征 Description	单向开门 Front loading/ 双通门 Pass through		单向开门 Front loading/ 双通门 Pass through	
温控类型 Thermostat	机械温控 Mechanical control		机械温控 Mechanical control	
外形尺寸 Product Size W×D×H (mm)	636×832×990（单向）/636×859×990（双向）		636×832×1854(单向)/636×859×1854(双向)	
包装尺寸 Packing Size W×D×H (mm)	742×944×1195		742×944×2075	
电压 Voltage	220-240V ~		220-240V ~	
功率 Power	1.1kW		2.2kW	
频率 Frequency	50/60Hz		50/60Hz	
防水等级 IP Rating	IPX4		IPX4	
层数 Number Of Layers	5		15	
面包盘尺寸 Sheet Pan Size (mm)	660×460×25		660×460×25	
可放面包盘数量 No. of Sheet Pan	5		15	
份数盆尺寸 GNP Size (mm)	530×325×65 (1/1GNP)		530×325×65 (1/1GNP)	
可放份数盆数量 No.of GN pan	4		14	
认证类型 Certificate	-		-	
净重 Net Weight (kg)	82	86	138	150
毛重 Gross Weight (kg)	120	124	211	219

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

COUNTERTOP ELECTRIC DUMPLING GRIDDLE
单双头电热煎饺机

Lapiioey® FEATURES / 产品特点

- 镀硬铬扒板，保证高效热传递同时抗腐蚀更出色
- 上盖简洁设计，随停任意位置，清洁更方便
- 控制面板可编程设置，满足更多烹任需求，可煎饺及扒类食材
- 高效低密度发热管，从室温 30° C 到 210° C 仅需 11 分钟
- 加水时间及注水量灵活设置
- Hard chrome plated grill plate to ensure efficient heat transfer and better corrosion resistance
- Simple design of the top cover, stopping at any position, more convenient to clean
- Editable settings on the control panel to meet more cooking needs, pan fried dumplings and steaks
- Flexible setting of water filling time and volume
- High-efficiency low-density heating tube, only 11 minutes from room temperature 30℃ to 210℃



PYJ-01



PYJ-02

烹饪完毕蜂鸣及指示灯提醒
Buzzer and indicator light to remind after cooking

产品型号 Model	PYJ-01	PYJ-02
尺寸 Dimension (mm)	285 x 596 x 341	570 x 596 x 341
烹饪区尺寸 Maximum Cooking Quantity (mm)	317 x 204	317 x 204 x2
包装尺寸 Packing Size WxDxH (mm)	410 x 695 x 510	665 x 695 x 510
电压 / 频率 Voltage & Frequency	220-240V~, 50/60Hz	220-240V~, 50/60Hz
功率 Power	3kW	6kW
烹饪最大量 Maximum Cooking Quantity	28~33 个	28~33 个 x2
净重 Net Weight (kg)	27	52
毛重 Gross Weight (kg)	29.5	55
认证类型 Certificate	CE	CE

产品型号 Model	PYJ-01/02 出厂默认参数 Default	PYJ-01/02 参数设置范围 Range
预热温度 Pre-heating Temperature	210℃	50~250℃
烹饪时间 Cooking Time	5:40	00:30~30:00 (mm:SS)
烹饪温度 Cooking Temperature	205℃	50~250℃
注水时间 Water Feeding Time	00:10 (mm:SS)	00:01~10:00 (mm:SS)
注水量 Feeding Water Volume	250ML	0~950ML

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

ELECTRIC AUTO-LIFT NOODLE COOKER (2-TANK,6-BASKET)
电热双缸六头升降煮面炉

Lapiioey® FEATURES ／ 产品特点

- 全不锈钢机身设计，外观简洁
- 台面上自动升降机构防水设计，升降电机使用寿命大为提升
- 前置按钮式升降开关，使用寿命优于拍打式，每个按键有 2 个菜单
- 多档功率档位开关，根据烹饪选择所需功率
- 配置快进水阀和慢补水阀，有溢水功能
- 电脑版智能精准控温控时，具有保温功能，保温温度可调
- 具有超温保护功能和缺水提醒功能
- 独特的喷流式设计，高效节能
- 前脚后轮，方便搬运和设备安装调整

- Stainless steel body design, simple appearance
- Waterproof design of the automatic lifting structure on the table, greatly improving the service life of the lifting motor
- The service life of the lifting push button is longer than that of the flap type. Each button has two menus
- Multi-power gear switch, select the required power according to cooking
- Equipped with fast water inlet valve and slow water refill valve with overflow function
- Intelligent computer panel controls temperature and time precisely. It has the function of heat preservation and the heat preservation temperature is adjustable
- With over-temperature protection and water shortage reminder function
- Unique water jet design, high efficiency and energy saving
- The front feet and rear casters are convenient for moving around







产品型号 Model	NTG-6A
产品尺寸 Product Size W×D×H (mm)	600 x 800 x 1038
缸体尺寸 Cylinder Block Size (mm)	192 x 560 x 200
包装尺寸 Packing Size W×D×H (mm)	910 x 720 x 1200
容量 Capacity (Liter)	19L x 2
电压 / 频率 Voltage & Frequency	380-415V 3N~, 50/60Hz
额定功率 Rated Power (kW)	12.3kW
预存菜单 Menu No.	12
防 水 等 级 IP Rating	IPX4
净重 Net Weight (kg)	75
毛重 Gross Weight (kg)	83

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

ECONOMIC COMBI OVEN
简易蒸烤箱
（不带锅炉）(without boiler)



Lapiioey® FEATURES ／ 产品特点

- 三种工作模式，蒸、烤、蒸烤混合，可满足多种烹饪需求
- 旋钮控制，支持手动模式和菜单模式，用户操作便捷
- 可储存 9 个菜单，最高可设置 3 段程序
- 涡轮热风循环，加热均匀，确保食品色泽如一
- 自带蒸汽喷雾，强大蒸汽，烹饪自如
- 耐高温氖气照明，显色指数高，易于观察菜品上色情况
- 双层钢化玻璃隔热门，高效隔热，避免烫伤
- 侧挂式手持水枪，清洗方便，省心省力

- Three operating modes: steam, bake, and steam-bake combination, catering to various cooking needs.
- Rotary knob control supports both manual and menu modes for user-friendly operation.
- Stores up to 9 menus with a maximum of 3 programmable cooking stages.
- Turbo hot air circulation ensures even heating for consistent food color and texture.
- Built-in steam spray delivers powerful steam for precise cooking.
- High-temperature-resistant neon lighting with high color rendering index for easy dish monitoring.
- Double-layer tempered glass door provides effective heat insulation and prevents burns.
- Side-mounted handheld spray gun for convenient and effortless cleaning.

产品型号 Model	NC0423S-B	NC0611S-B	NC1011S-B
名称 Name	四层电子版万能蒸烤箱 4-Layer Electronic Combi Oven	六层电子版万能蒸烤箱 6-Layer Electronic Combi Oven	十层电子版万能蒸烤箱 10-Layer Electronic Combi Oven
产品尺寸 (mm) Product Size WxDxH	660×658×716	880×876×943	880×876×1150
内膛规格 (mm) Chamber Size	370×460×380	440×670×508	440×670×735
包装尺寸 (mm) Packing Size WxDxH	789×764×875	1014×974×1075	1014×974×1290
电压 \ 频率 Voltage & Frequency	380V 3N~ 50Hz	380V 3N~ 50Hz	380V 3N~ 50Hz
总功率 (kW) Rated Power	6.1kW	12.3kW	18.3kW
容量 Capacity	4×2/3GNP	6×1/1GNP	10×1/1GNP
控制器 Control	电子旋钮控制器 Electronic knob controller	电子旋钮控制器 Electronic knob controller	电子旋钮控制器 Electronic knob controller
温度控制范围 Temperature range	25-300℃	25~300℃	25~300℃
防水等级 IP Rating	IPX3	IPX3	IPX3
净重 Net Weight (kg)	60	153	157
毛重 Gross Weight (kg)	90	187	204
配置网架数 No. of Rack	2	4	4
认证类型 Certificate			

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

广州极效能源科技有限公司