深圳市鸿之森电子有限公司

产　品　规　格　书

Specification for approval

产品名称/The product name: **0603 紫光 0.4mm 高亮贴片**

产品型号/Product model: **鸿之森 HS-0603-UV 原芯紫光**

编　　号/Make no: **E.C.11.9001**

版 本 号/Version: **A3**

日　　期/Date: **2025-03-15**

签核/Signed			
制定 Formulate	审核 Audit	品质部 QC	批准 Approve
Yang jian	Yang xian	Song chunping	Huang gaobo

一、产品描述/Features

- 外观尺寸/Package(L/W/H) : 1.6×0.8×0.4mm
- 颜色/Color: 紫光/purple light
- 胶体/Lens: 无色透明/Water Cleart
- EIA规范标准包装/EIA STD Package
- 环保产品，符合ROHS要求/Meet ROHS, Green Product
- 适用于自动贴片机/Compatible With SMT Automatic Equipment
- 适用于红外线回流焊制程/Compatible With Infrared Reflow Solder Process

二、外形尺寸及建议焊盘尺寸/Package Profile & Soldering PAD Suggested

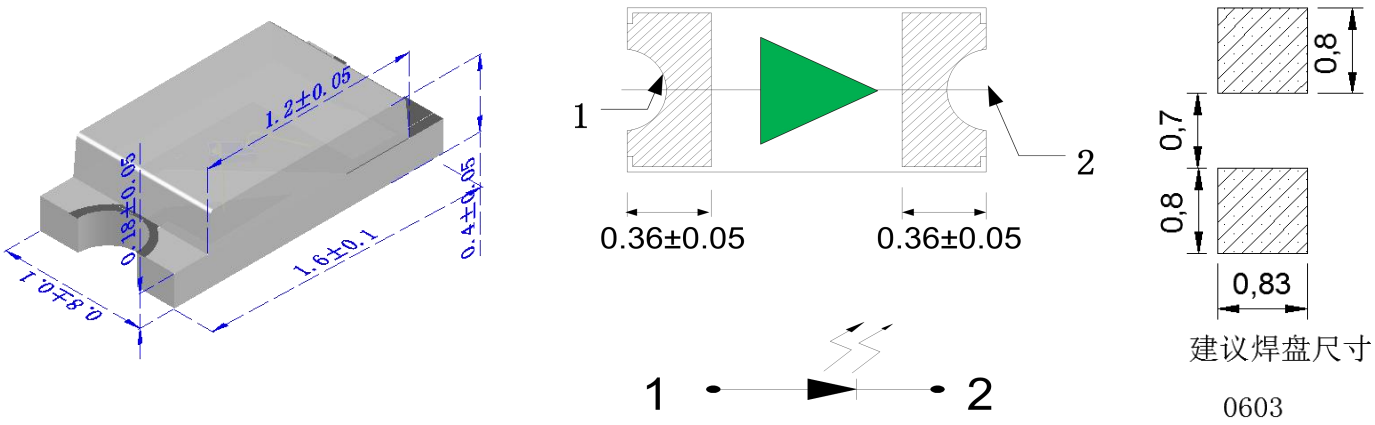

建议焊盘尺寸

0603

注/Notes: 1. 单位 ： 毫米（mm）/All dimensions are in millimeters.

2. 公差 ： 如无特别标注则为± 0.1 mm/Tolerance is ± 0.10 mm unless otherwise noted.

三、建议焊接温度曲线/Soldering Profile Suggested

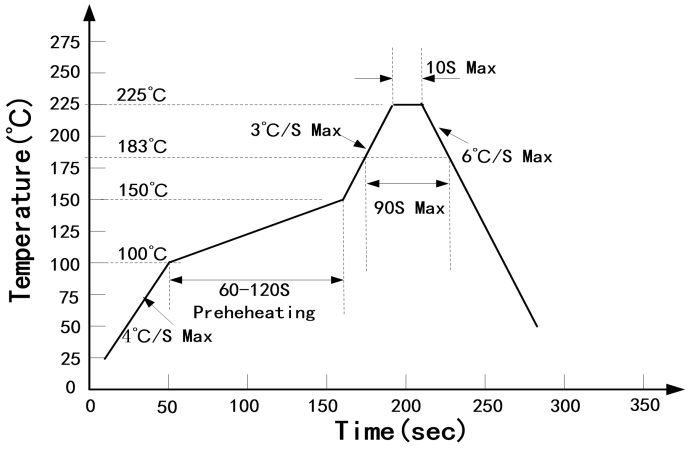

有铅制程/lead

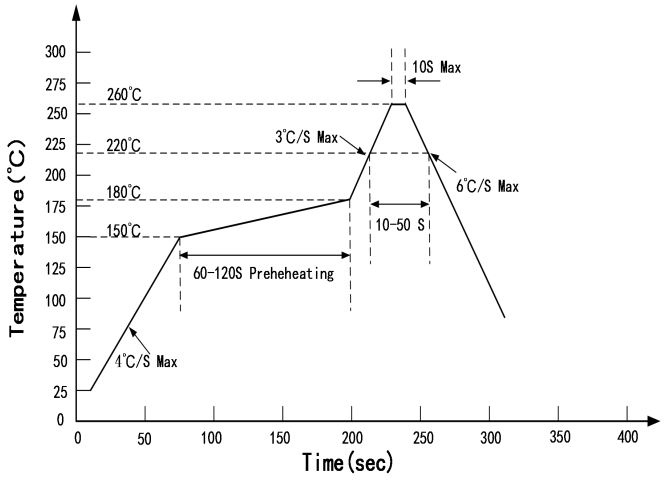

无铅制程/lead-free

四、极限参数/ Limit parameters

最大绝对额定值/Absolute Maximum Ratings

参数/Parameter	符号/Symbol	数据/Data 紫光/purple light	单位/Unit
消耗功率/Power Dissipation	PD	75	MW
最大脉冲电流/Peak Forward Current(1/10 占空比, 0.1ms 脉宽)	IFP	60	mA
正向直流工作电流/DC Forward Current	IF	25	mA
反向电压/Backward Voltage	VR	9	V
存储环境温度/Storage Temperature Range	Tstg	- 40℃ ~ 90℃	
工作环境温度/Operating Temperature Range	Topr	-30℃ ~ 85℃	
焊接条件/Soldering Condition	Tsol	回流焊/Reflow soldering : 260°C ， 10s max 手动焊/Hand soldering : 300°C ， 3s max	

注 1:超出最大极限值，芯片有可能损坏。在极限参数范围内工作，器件功能正常，但并不完全保证满足个别性能指标。

五、光电参数/Photoelectric parameters （Ta=25℃）

参数/Parameter	符号 Symbol	数据 Data 最小值 Min	平均 Average	最大值 Max	单位 Symbol	测试条件 Test Condition
正向电压 Forward Voltage	Vf	3.0	---	3.4	V	IF=5mA
光强 Light Intensity	Iv	5	---	25	mcd	IF=5mA
主波长 dominant wavelength	λd	390	---	420	(nm)	IF=5mA
峰值波长 peak luminous wavelength	λp	---	405	---	(nm)	IF=5mA
反向电流 reverse current	Ir	---	---	10	μA	VR=9V
半光强视角 Half intensity angle of view	2θ1/2	---	120	---	Deg	IF=5mA

六、光电参数代表值特征曲线/Typical Electrical-Optical Characteristics Curves

Fig.1 Relative intensity Vs. Wavelength

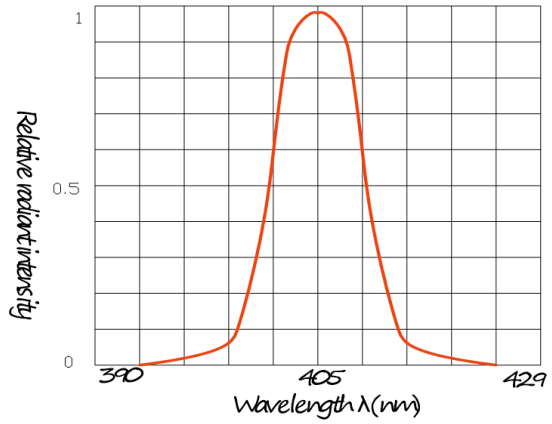

Fig.2 Forward current derating curve Vs. Ambient temperature

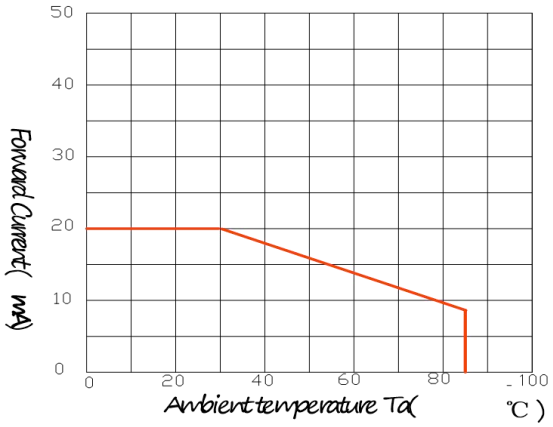

Fig.3 Forward current Vs. Forward voltage

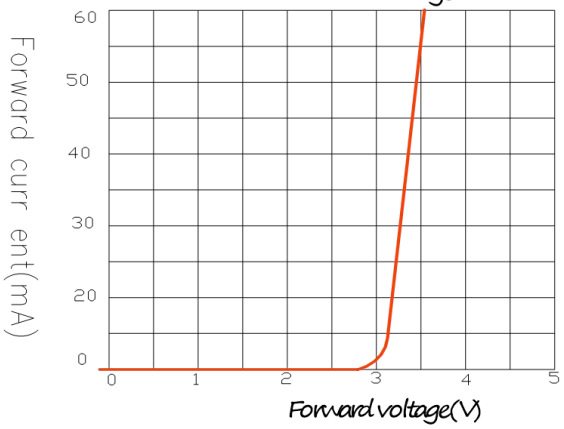

Fig.4 Relative luminous intensity Vs. Ambient temperature

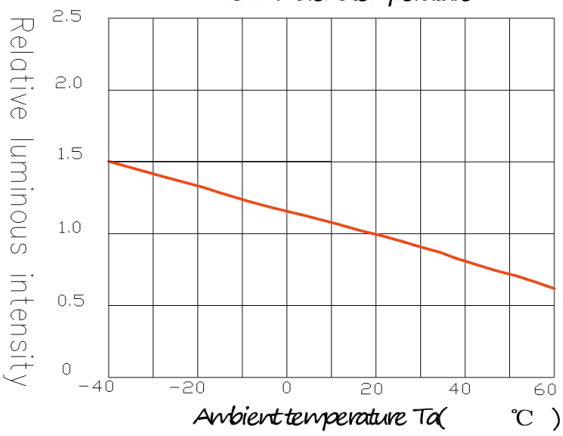

Fig.5 Relative luminous intensity Vs. Forward current

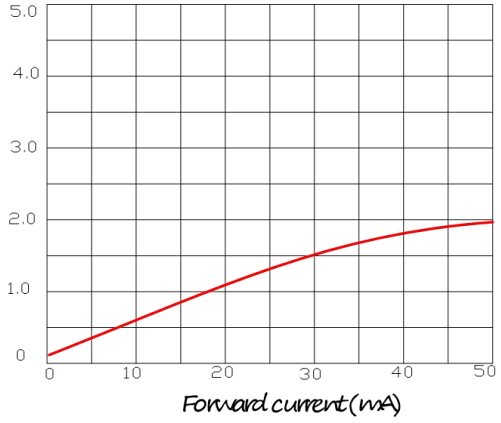

Fig.6 Radiation diagram

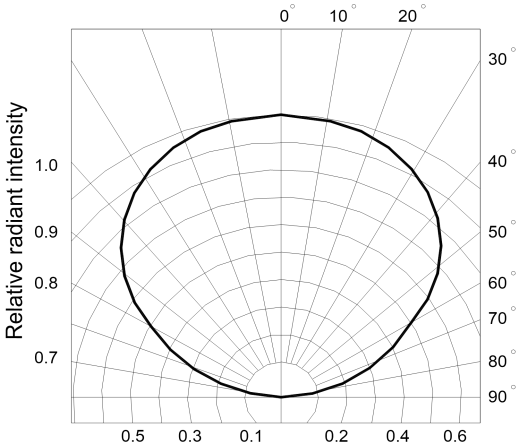

注:　如无另外注明，测试环境温度为/Note: If not otherwise indicated, the test environment temperature is 25 + 3°C.

七、标签及标识/Label Explanation

光强/IV　（单位（mcd））
波长/WD　（单位（nm））
电压/VF　（单位（V））

八、包装载带与圆盘尺寸/Reel And Tape Dimensions

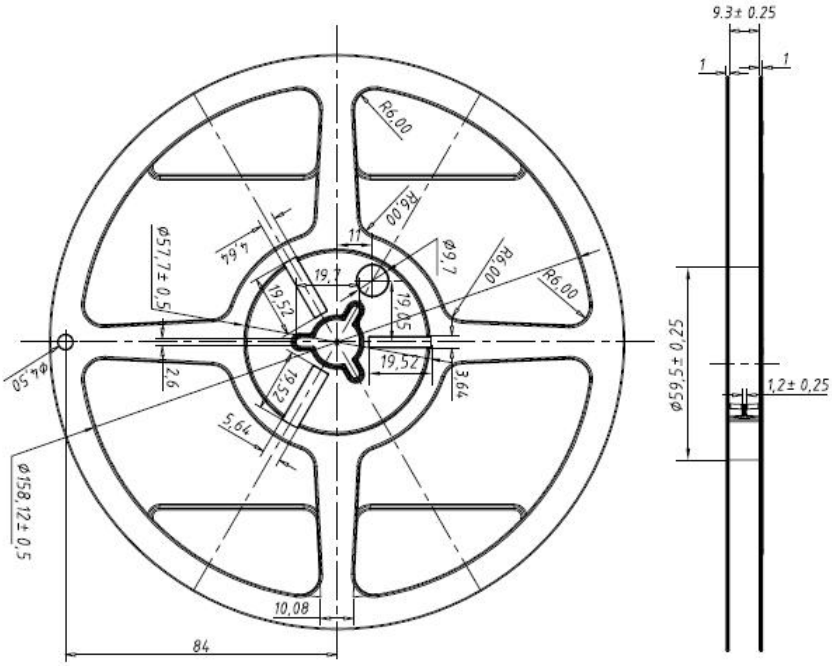

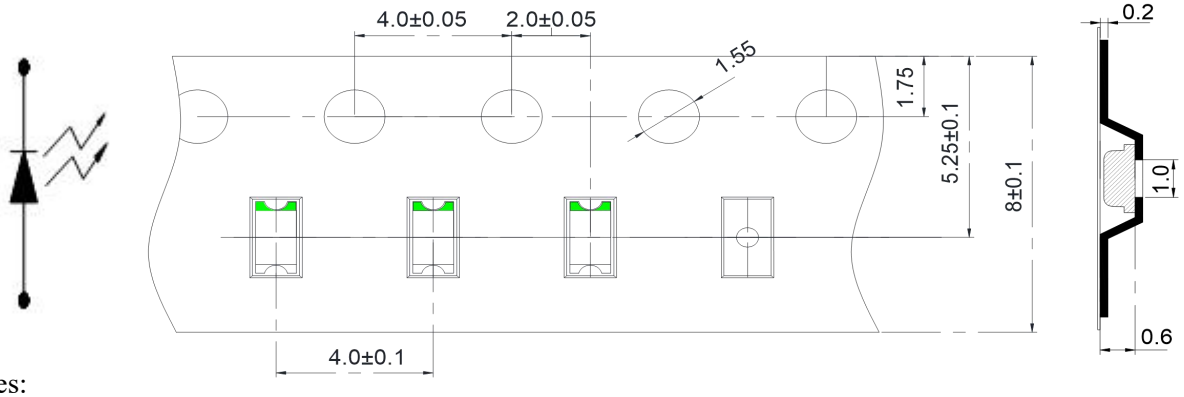

注/Notes:
1. 尺寸单位为毫米/All dimensions are in millimeters(mm).
2. 尺寸公差是±0.1/Tolerance is ± 0.1 mm unless otherwise noted mm.

九、圆盘及载带卷出方向及空穴规格/Winding direction and hole specification of disc and belt

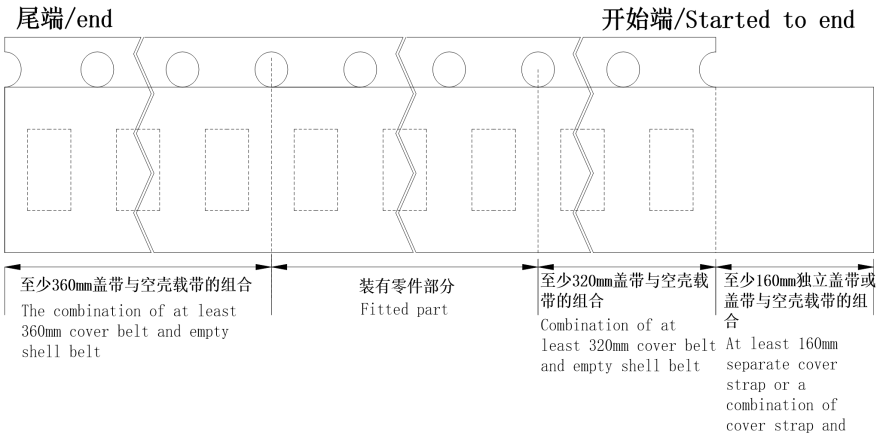



十、包装/packaging

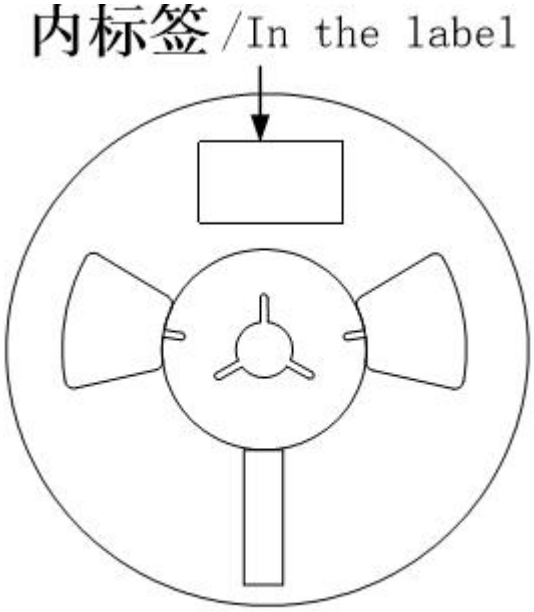

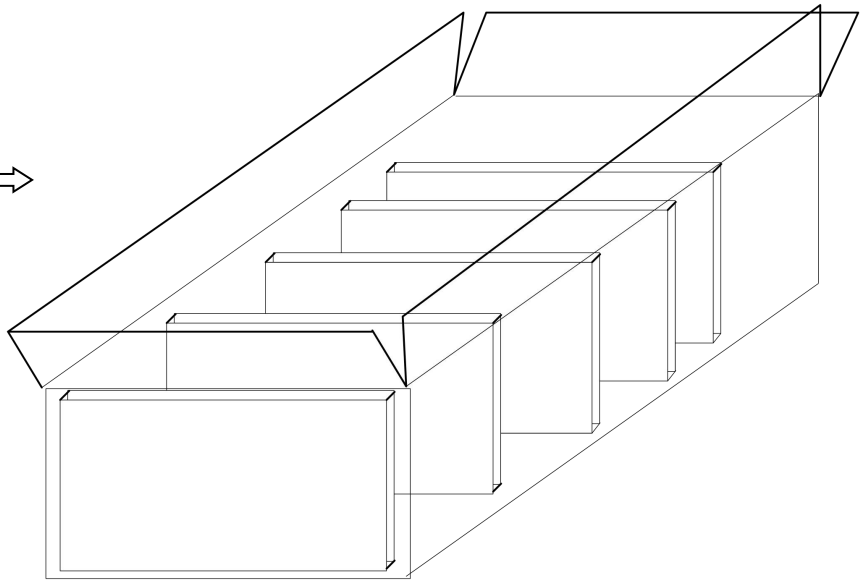

圆盘/Disc

大盘：10 盘/箱或 20 盘/箱

Large dish: 10 plates/box or 20 plates/box

小盘：100 盘/箱或 50 盘/箱

Small plates: 100 plates/carton or 50 plates/carton

十一、信赖度测试/Reliability Test Items And Conditions

测试项目 Test Item	测试环境 The test environment	测试时间 The test of time	数量 quantity	允收/拒收 Accept/Reject	参考标准 The reference standard
工作寿命 The working life	Ta=25℃ IF=5mA	1000 hr	22pcs	0/1	MIL-STD-750D:1026 MIL-STD-883D:1005 JIS C 7021:B-1
高温高湿储存 High temperature and high humidity storage	85℃/85%RH	240 hr	22pcs	0/1	MIL-STD-202F:103B JIS C 7021:B-11
高温储存 High temperature storage	Ta=100℃	1000 hr	22pcs	0/1	MIL-STD-883D:1008 JIS C 7021:B-10
低温储存 Low Temperature Storage	Ta=-40℃	1000 hr	22pcs	0/1	JIS C 7021:B-12
冷热冲击 Cold and hot shock	-40℃ - +100℃ 15min 15min	50 次循环	22pcs	0/1	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1011
回流焊 Reflow soldering	Tsol*： 255 +5/-5 ℃	--------	22pcs	0/1	MIL-STD-750D:2031.2 J-STD-020C303 303A

十二、注意事项/Cautions

使用/Use：

1、LED 是电流驱动元件，电压的细微变化会产生较大的电流波动,导致元件遭到破坏。客户应使用电阻串联作限流保护。

LED is a current driving element. A slight change in voltage will cause a large current fluctuation, resulting in component damage.The customer shall use resistance in series for current limiting protection.

2、为了确保多颗 LED 并联使用时光色一致，建议每条支路使用单独电阻,如下图模式 A 所示；

如采用下图模式 B 所示电路，LED 光色可能因每一颗 LED 不同的伏安特性而造成光色差异。

In order to ensure the parallel use of multiple leds is consistent in time and color, it is recommended to use A separate resistor for each branch, as shown in mode A in the figure below.

If the circuit shown in mode B below is adopted, the LED light color may be different due to the different volt-ampere characteristics of each LED.

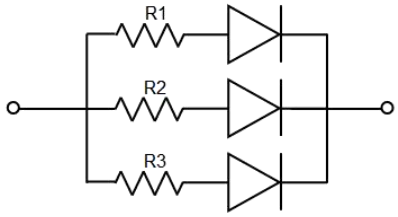

电路模式/Circuit model A



电路模式/Circuit model B

3、过高的环境温度会影响 LED 的亮度以及其他性能, 所以为能使 LED 有较好的性能表现应远离热源。

Too high ambient temperature will affect the brightness and other performance of LED, so in order to make the LED have better performance should be kept away from heat source.

4、光电参数公差/Photoelectric parameter tolerance：

正向电压 REF / VF：　±0.1V

亮度 CAT / IV：　±10%

波长 HUE / WLD：　±1nm

存储/Storage：

1、未打开原始包装的情况下，建议储存的环境为: 温度:25℃±5℃；湿度: 40%RH 以下。当库存超过 1 个月，使用前应做除湿处理，条件 60℃ /12 小时，储存最长时间不超过一年。

When the original package is not opened, the recommended storage environment is: temperature :25℃±5℃;Humidity: below 40%RH.Dehumidification should be done before use when it stored for more than 1 months. Conditions 60℃/12 hours.The maximum storage time is not more than one year.

2.LED 是湿度敏感元件，为避免元件吸湿，建议打开包装后，将其储存在有干燥剂的密闭容器内，或者储存在氮气防潮柜内。

LED is a humidity sensitive element. To avoid hygroscopic, it is recommended to store it in an airtight container with desiccant after opening the package, or in a nitrogen moisture-proof cabinet.

3.打开包装后，元件应该在 24 小时内（1 天）使用；且贴片后应尽快做焊接。

After opening the package, the components should be used within 24 hours (1 day);Welding should be done as soon as possible after the patch.

4. 如果干燥剂失效或者元件暴露于空气中超过 168 小时（7 天），应作除湿处理。
烘烤条件：60℃ * 24 小时。

If the desiccant fails or the element is exposed to air for more than 168 hours (7 days), dehumidification shall be performed.Baking conditions: 60℃ * 24 hours.

静电防护/ESD:

LED（特别是 InGaN 结构的蓝色、翠绿色、紫色、白色、粉红色 LED）是静电敏感元件，静电或者电流过载会破坏 LED 结构。LED 受到静电伤害或电流过载可能会导致性能异常，比如漏电流过大,VF 变低,或者无法点亮等等。所以请注意以下事项：

Leds (especially the blue, emerald, purple, white, pink LEDS of the InGaN structure) are static sensitive elements, and static electricity or current overload can destroy the LED structure.LED exposure to static damage or current overload may cause performance anomalies such as high leakage flow, low VF, or failure to light.So please note the following:

1. 接触 LED 时应佩戴防静电腕带或者防静电手套。
2. 所有的机器设备、工制具、工作桌、料架等等，应该做适当的接地保护。
3. 储存或搬运 LED 应使用防静电料袋、防静电盒以及防静电周转箱，严禁使用普通塑料制品。
4. 建议在作业过程中，使用离子风扇来压制静电的产生。
5. 距离 LED 元件 1 英尺距离的环境范围内静电场电压小于 100V。

1. Anti-static wrist band or anti-static gloves should be worn when contacting LED.
2. All machinery, equipment, tools, work tables, racks, etc., shall be properly grounded.
3. Anti-static bags, anti-static boxes and anti-static circulation boxes should be used for storage or handling of LED, and ordinary plastic products are strictly prohibited.
4. It is recommended to use ionic fans to suppress the generation of static electricity during operation.
5. The electrostatic field voltage is less than 100V within the ambient range of 1 foot away from the LED element.

清洗/Cleaning:

建议使用异丙醇等醇类溶液清洗 LED，严禁使用腐蚀性溶液清洗。

It is recommended to use isopropanol and other alcohol solutions to clean the LED. Corrosive solution is strictly prohibited.

其他/other:

1. 本规格所描述的 LED 定义应用在普通的的电子设备范围（例如办公设备、通讯设备等等）。如果有更为严苛的信赖度要求，特别是当元件失效或故障时可能会直接危害到生命和健康时（如航天、运输、交通、医疗器械、安全保护等等），请事先知会敝司业务人员。
2. 高亮度 LED 产品点亮时可能会对人眼造成伤害，应避免从正上方直视。
3. 出于持续改善的目的，产品外观和参数规格可能会在没有预先通知的情况下作改良性变化。

1. The LED definition described in this specification applies to the scope of common electronic equipment (such as office equipment, communication equipment, etc.).If there are more stringent reliability requirements, especially when component failure or failure may directly endanger life and health (such as aerospace, transportation, traffic, medical equipment, safety protection, etc.), please inform our business personnel in advance.
2. High-brightness LED products may cause harm to human eyes when they are lit, so avoid looking directly from above.
3. For the purpose of continuous improvement, the appearance and specifications of the product may be changed in a benign way without prior notice.

十三、亮度、电压、颜色等级区分/Distinguish between brightness, voltage and colour levels

1. 亮度等级/Brightness level（IF=5mA)

等级/level	紫光/purple light	
	最小值/Min（mcd)	最大值/Max（mcd)
1	5	10
2	10	15
3	15	20
4	20	25

每组数据公差为/The tolerance of each set of data is 10%.

2. 波段等级/Band level（IF=5mA)

等级	紫光/purple light	
	最小值（nm)	最大值（nm)
1	390	403
2	403	416
3	419	429

每组数据公差为 The tolerance of each set of data is　±0.01.

3. 电压等级/Voltage grade（IF=5mA)

等级/Grade	1	2	3	4
范围/Range	3.0-3.1	3.1-3.2	3.2-3.3	3.3-3.4

每组数据公差为 The tolerance of each set of data is ±0.1V.

十四、免责声明/Disclaimer

◆任何超出本规格书中建议的存放条件、使用条件及绝对最大额定参数条件，而造成的产品损坏或连带事故的发生，我司概不负责赔偿或承担连带责任；

We shall not be responsible for compensation or joint liability for any product damage or joint accident caused by exceeding the storage conditions, use conditions and absolute maximum rated parameter conditions recommended in this specification;

◆为避免任何可能的产品损坏或危害生命健康的风险，在使用本产品前建议先咨询我司；

In order to avoid any possible risk of product damage or endangering life and health, it is recommended to consult our company before using this product;

◆未经我司书面许可，禁止对产品进行任何形式的拆解和逆向工程分析，所有有关本产品的分析测试报告，必须报告给我司；

Disassembly and reverse engineering analysis of the product in any form is prohibited without written permission of our company. All analysis and test reports related to the product must be reported to our company.

◆我司尊重并保护知识产权，未经我司许可的销售行为直接或间接引发的知识产权纠纷的，我司不承担法律责任；

Our company respects and protects intellectual property rights. If any intellectual property dispute is directly or indirectly caused by any sales activity without our company's permission, our company shall not bear legal liability.

◆本产品任何形式的升级换代，若非必要，恕不另行通知；

Any upgrade or upgrade of this product in any form is not necessary without prior notice.

◆本产品规格书中其它未尽事宜，请致电或咨询我司销售部门。

For other matters not mentioned in this product specification, please call or consult our sales department.