




85步进电机

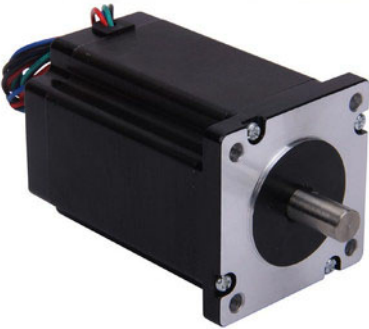

- 步距角1.8°；
- 法兰边长85×85mm；
- 步距精度±5%；
- 环境温度 -20℃~+50℃；
- 最大径向力220N；
- 最大轴向力60N

型号	机身長 L(MM)	力矩 (N.m)	电流 (A)	电阻 (Ω)	转动惯量 (g.cm2)	重量 (kg)	出轴方式 (mm)
85HB65-404	66	3	4	0.6	850	2	键槽14X37 (5°25) 双扁14X37
85HB80-404	80	4.5	4	0.75	1050	2.5	键槽14X37 (5°25) 双扁14X37
85HB97-604	98	6.5	6	0.33	1550	3	键槽14X37 (5°25) 双扁14X37
85HB118-604	118	8.2	6	0.59	1800	3.8	键槽14X37 (5°25) 双扁14X37
85HB125-604	126	9.5	6	0.65	2200	4.2	键槽14X37 (5°25) 双扁14X37
85HB150-604	150	12	6	0.5	2500	5	键槽14X37 (5°25) 双扁14X37

