
LIGENCY

SMART FAN LIGHT
USE AND CARE GUIDE

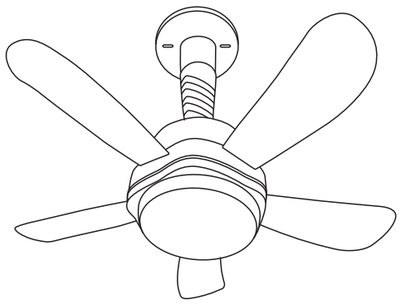

Safety Information

PLEASE READ ALL SAFETY INFORMATION AND INSTALLATION INSTRUCTIONS BEFORE STARTING TO INSTALL THE FAN LIGHT.

1. To reduce the risk of electrical shock, the electricity has been turned off at the circuit breaker or fuse box before begin.
2. The outlet box and support structure must be securely mounted and capable of reliably supporting 35ib.(15.9kg). Use only UL listed outlet boxes marked "Acceptable for Fan Support of 35ibs(15.9kg)or less."
3. The fan must be mounted with a minimum of 7 ft (2.3m) distance from the trailing edge of the blades to the floor.
4. Do not operate the reversing switch while the fan blades are in motion. You must turn the fan off and stop the blades before you reverse the blade direction.
5. Do not place objects in the path of the blades.
6. To avoid personal injury or damage to the fan and other items, use caution when working around or cleaning the fan.
7. Electrical diagrams are for reference only. Light kits that are not packed with the fan must be UL-listed and marked suitable for use with the model fan you are installing. Switches must be UL General Use Switches. Refer to the instructions packaged with the light kits and switches for proper assembly.
8. After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
9. All set screws must be checked and re-tightened where necessary before installation.

WARNING:

1. To reduce the risk of personal injury, do not bend the blade brackets (also referred to ac flanges) during assembly or after installation. Do not insert objects in the path of the blades.
2. To reduce the risk of fire or electric shock, do not use this fan with any solid-state speed control device.
3. To avoid possible electrical shock, turn the electricity off at the main fuse box before wiring. If you feel you do not have enough electrical wiring knowledge or experience, contact a licensed electrician.
4. Electrical diagram are for reference and marked suitable for use with this fan.
5. To reduce the risk of fire, electric shack, or personal injury. Mount to outlet box marked "Acceptable for fan support of 35 lbs. (15.9 kg) or less. " And use the screws provided with the outlet box.

Warranty

The supplier warrants the fan motor to be free from defects in workmanship and material present at time of shipment from the factory for a lifetime after the date of purchase by the original purchaser. The supplier also warrants that all other fan parts, excluding any glass or acrylic blades, to be free from defects in workmanship and material at the time.

Of shipment from the factory for a period of two years after the date of purchase by the original purchaser. We agree to correct such defects without charge or at our option replace with a comparable or superior model if the product is returned.

To obtain warranty service, you must present a copy of the receipt as proof of purchase. All costs of removing and reinstalling the product are your responsibility. Damage to any part, such as by accident, misuse, improper installation, or by affixing any accessories, is not covered by this warranty,

Because of varying climatic conditions, this warranty does not cover any changes in brass finish, including rusting, pitting, corroding, tarnishing, or peeling. Brass finishes of this type give their longest useful life when protected from varying weather conditions. A certain amount of "wobble" is normal and should not be considered a defect.

Servicing performed by unauthorized persons shall render the warranty invalid. There is no other express warranty, Hereby disclaims any and all warranties, including but not limited to those of merchant ability and fitness for a particular purpose to the extent permitted by law, The duration of any implied warranty which cannot be disclaimed is limited to the time period as specified in the express warranty. Some states do not allow a limitation on how long an implied warranty lasts, so the above limitation may not apply to you.


The retailer shall not be liable for incidental, consequential, or special damages arising out of or in connection with product use or performance except as may otherwise be accorded by law. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives specific legal rights, and you may also have other rights which vary from state to state. This warranty supersedes all prior warranties. Shipping costs for any return of product as part of a claim on the warranty must be paid by the customer.

Pre-installation


TOOLS REQUIRED



Package Includes

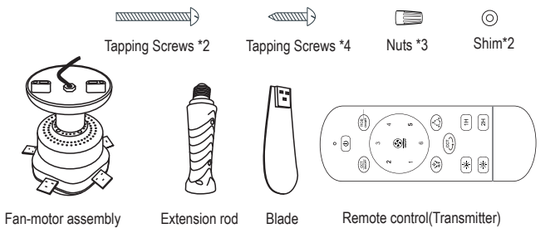


Mounting hanger (hanging part)



For wooden/cement ceilings, use Bracket (B) as a guide to mark the positions of the two Expansion bolts (A),Remove the Bracket(B), drill 2 holes with a diameter of 3mm, screw in the Expansion bolt (A), place the Bracket(B), and tighten it with Tapping screws (C).

Fan wiring diagram


Connect the wires on the bracket to the home circuit




WARNING:
Tum off the electric power during installation and making wire connection.

Assembly instruction


Once Remove the bracket from the Fan-motor assembly(A) by rotating it




If necessary install suspension rods, Add an Extension rod (B) between the Bracket and the Fan-motor assembly (A), and rotate it to fix it

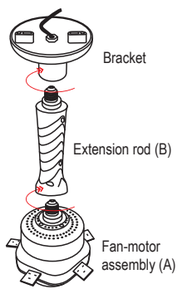

Tighten it with Tapping screws. Insert the blade (B) directly into the interface on the Fan-motor assembly (A) and firmly secure the blade(B)

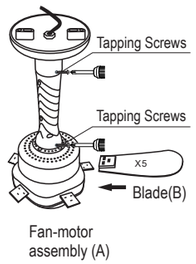

Use of remote control

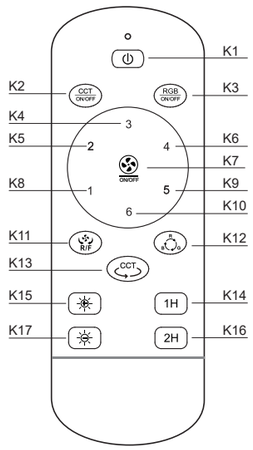

NOTE: The remote needs to be paired with the light before use.(Requires 2*AAA batteries)
Please follow the steps:
Switch on the power of the fan light, press and hold the pairing key(K1) for about 5 seconds, then you will hear a “beep” sound, and the light flicks, which indicate the pairing success.

KEYS	Description
K1	1. Press to turn off the fan light. 2. Press and hold for 5 seconds to pair the remote with the fan light.
K2	1. Press to turn on/off the light. 2. Press and hold for 5 seconds to enter pairing mode and connect to the Wi-Fi network.
K3	Press to turn on/off the RGB color of light.
K4	Fan Speed 3
K5	Fan Speed 2
K6	Fan Speed 4
K7	1. Press to turn on/off the fan. 2. Press and hold for 2 seconds to turn on/off the buzzer.
K8	Fan Speed 1
K9	Fan Speed 5
K10	Fan Speed 6
K11	Forward / Reverse
K12	1. Press to switch between multiple colors. 2. Press and hold for 2 seconds to switch between multiple modes.
K13	1. Press to switch color temperature between 2700-4000-6500K. 2. Press and hold for stepless color temperature adjustment.
K14	1. Press to set timer for 1 hour. 2. Press and hold for 5 seconds to cancel the timer.
K16	1. Press to set timer for 2 hours. 2. Press and hold for 5 seconds to cancel the timer.
K15	Brightness+
K17	Brightness-
K1+K17	Press and hold the K1 and K17 keys to unbind the remote.

App Connection

It is recommended to first pair your device in a location close to your router BEFORE installation.

STEP 1
The remote needs to be paired with the light before App connection.(Requires 2*AAA batteries) Press and hold the pairing key(K1) for about 5 seconds, then you will hear a “beep” sound, and the light flicks, which indicate the pairing success.

STEP 2
Please download the Smart Life APP by scanning the QR code or from the App Store (for iPhone) or from Google Play Store (for Android phones).

GET IT ON Google Play
Download on the App Store

STEP 3
Make sure your phone or tablet is successfully connected to the 2. 4GHZ Wi-Fi network that your device will be placed on and ensure that your Bluetooth is enabled. Open the Smart Life app and create an account by following the on-screen instructions.

NOTE

Most Smart devices only work on a 2. 4GHz Wi-Fi network. Many newer home Wi-Fi networks are mixed networks that are set to 5GHz by default (ex: AT&T, Verizon) and you may need to Use AP pairing mode to connect. If you still have difficulty, contact your Internet Service Provider for assistance with 2. 4GHz network setup.

STEP 4
Confirm that(STEP 1) the remote has been paired with the fan light. Press and hold the pairing key(K2) for about 5 seconds, and the light flicks, which indicate it is in pairing mode.




STEP 5
Confirm that the device is in pairing mode, LED is RAPIDLY blinking. In the Smart Life app, select the "+" in the upper right corner of the home screen to add a new device.




The app will detect the nearby Wi-Fi+BLE enabled device and ask if you would like to add it, click "Add". Ensure that the device is checked and then click the "+" button.






STEP 6
Confirm that the network displayed is your 2.4GHz Wi-Fi network, then enter your Wi-Fi password and click "Next".






NOTE: this may take up to one minute


Once complete, your device will be connected to the network. Confirm or change the settings for your device and then click "Done". Your device is now setup and ready to use!





Device Control


After connecting the device, automatically it will open the page to control it by the application. With the keys you find at the bottom page, you can:
• Home: Control the on/off, brightness, color, scene, and music sync of the light.
• Fan: Control the on/off, mode, forward/reverse, speed, countdown of the fan.
• Timer: Set the time plan of the fan light.
• Setting: Other functional settings.

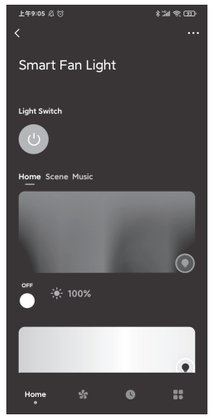


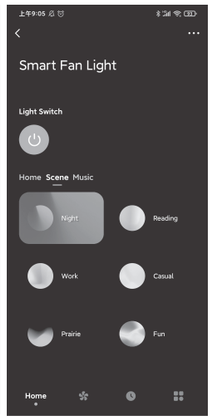

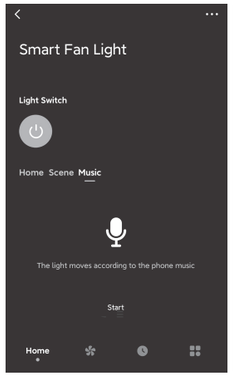

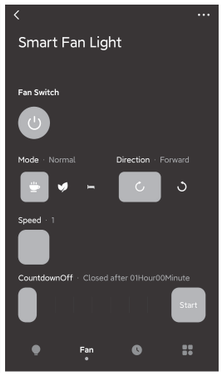

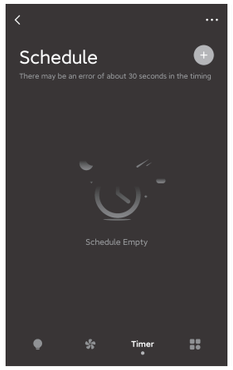

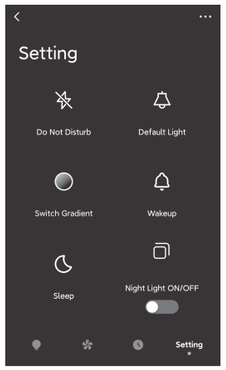



VOICE CONTROL OPTIONAL


works with alexa

AMAZON VOICE CONTROL SETUP

Make sure your Amazon Alexa device is installed and setup
STEP1: Open the Alexa app and go to Skills in More
STEP2: Search for and choose Smart Life
STEP3: Enable the Skill and authorize your account using your login information
NOTE: Use the same login information that you used to create your Smart Life account

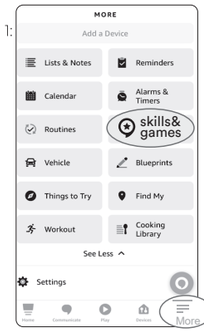1:


2:


3:


At any time, you can use the Alexa or the Smart Life app to rename your device. Using the original name or the name you specified for the device, you can request Alexa to control your device.

works with Hey Google

GOOGLE VOICE CONTROL SETUP

Make sure your Google Assistant device is installed and setup.
STEP1: Open the Google Home app, go to the Home menu, and tap the "+" button
STEP2: Click "Set up device"
STEP3: Click "Works with Google?"
STEP4: Search for and choose Smart Life and authorize your account using your login information
NOTE: Use the same login information that you used to create your Smart Life account

1:


2:


3:


4:


5:


At any time, you can use the Google Home app or the Smart Life app to rename your device. Using the original name or the name you specified for the device, you can request Google Assistant to control your device.

Care and Cleaning

⚠ WARNING: Make sure the power is off before cleaning your fan.

☐ Because of the fan's natural movement, some connections may become loose. Check the support connections, brackets, and blade attachments twice a year. Make sure they are secure. It is not necessary lo remove the fan from the ceiling.

☐ Clean your fan periodically to help maintain its new appearance over the years. Do not use water when cleaning, as this could damage the motor, or the wood, or possibly cause an electrical shock. Use only a soft brush or int-free cloth to avoid scratching the finish. The plating is sealed with a lacquer to minimize discoloration or tarnishing.

☐ You can apply a light coat of furniture polish to the wood for additional protection and enhanced beauty. Cover small scratches with a light application of shoe polish.

☐ You do not need to oil your fan. The motor has permanently-lubricated sealed ball bearings.

Troubleshooting

Problem	Solution
The fan will not start.	☐ Check the main and branch circuit fuses or breakers. ☐ Check the line wire connections to the fan and switch wire connections in the switch housing.
The fan is noisy.	☐ Ensure all motor housing screws are snug. ☐ Ensure the screws that attach the fan blade bracket to the motor hub are tight. ☐ Ensure the wire nut connections are not ratting against each other or the interior wall of the switch housing. Allow a 24-hour "breaking in" period. Most ☐ noises associated with a new fan disappear during this time. If you are using the Ceiling Fan light kit, ensure the screws securing the glassware are tight. ☐ Check that the light bulbs are also secure. ☐ Ensure the canopy is a short distance from the ceiling. It should not touch the ceiling. ☐ Ensure your outlet box is secure and rubber isolator pads were used between the mounting plate and outlet box.

If you have any problem or need any help, Please contact us via email: support@ligency.net or visit website: www.ligency.net.

You can also follow our Ligency Official SNS account as below:

Facebook: Ligency
https://www.facebook.com/LigencySmart
Instagram: @LigencySmart
https://www.instagram.com/ligencysmart
Pinterest: @LigencySmart
https://www.pinterest.com/LigencySmart
Twitter: @LigencySmart
https://twitter.com/LigencySmart
Youtube: @Ligency
https://www.youtube.com/channel/UCiyEcDnTlkPblHA3YXD0fAg
TikTok： @Ligencysmart
https://www.tiktok.com/@ligencysmart

Facebook
LIGENCYSMART
Instagram
Pinterest
Twitter
Youtube
Scan QR code to follow account
TikTok